

This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + Refrain from automated querying Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at http://books.google.com/

TM 5-803-10 NAVFAC P-457 AFR 88-33



OUTDOOR SPORTS FACILITIES

THE LIBRARY OF THE

JUN 23 1976

UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN

DEPARTMENTS OF THE ARMY, NAVY AND AIR FORCE
October 1975

TM 5-803-10 / NAVFAC P-457 / AFR 88-33

9711.558 Un32p

> TECHNICAL MANUAL 5-803-10 NAVFAC P-457 AIR FORCE REGULATION 88-33

DEPARTMENTS OF THE ARMY NAVY AND AIR FORCE

Washington, D.C. October 1975

PLANNING AND DESIGN OF OUTDOOR SPORTS FACILITIES

TABLE OF CONTENTS

Section 1	INTRODUCTION	Page		Page
1-1 1-2 1-3 1-4 1-5 1-6	Purpose and Scope Application References Cooperating Organizations General Introductory Information Proponent and User Comments	1-1 1-1 1-1 1-1	Tennis, Platform - Figure 18	.2-38 .2-40
Section 2	SPORTS COURTS AND FIELDS		Baseball - Official, Babe Ruth,	
2-1	Sports Courts Badminton - Figure 1 Basketball (AAU) - Figure 2 Basketball (NCAA) - Figure 3 Basketball, Biddy - Figure 4 Basketball, Goal-Hi - Figure 5 Boccie Ball - Figure 6 Croquet - Figure 7	2-4 2-6 2-8 2-10 2-12 2-14	Senior League - Figure 22	. 2-48 . 2-50 . 2-52 . 2-54 . 2-56 . 2-58
	Handball, One-Wall - Figure 8		Football, Touch and Flag - Figure 30 Golf Driving Range - Figure 31	
	Hopscotch - Figure 10 2-20 Horseshoes - Figure 11 2-22 Ice Hockey - Figure 12 2-24 Lawn Bowling - Figure 13 2-26	acrosse (Men's) - Figure 32	.2-66 .2-68 .2-70 .2-72 .2-74 .2-76 .2-78	

	Page		Page
	Track and Field - 1/4 Mile Running Layout - Figure 40		Skeet Field - Figure 60
	Marking Details-2 - Figure 42 2-87 Marking Details-3 - Figure 43 2-88 Marking Details-4 - Figure 44 2-89 Shot Put - Figure 45 2-90 Hammer Throw - Figure 46 2-92 Discuss Throw - Figure 47 2-94 Javelin Throw - Figure 48 2-96 Long Jump and Triple Jump - Figure 49 2-98 Pole Vault - Figure 50 2-100 High Jump - Figure 51 2-102	Section 4	Typical Court Fencing Details - Figure 63
~	Multiple Sports Combination Basketball-Volleyball Courts - Figure 52		Figure 69
	Multiple Recreation Court Details - Figure 55 2-113 Combination Baseball, Football,	Appendix A	A List of Sports Organizations:
	Softball Fields - Figure 56	Appendix E	Metric Conversion Tables
Section 3	RECREATION SHOOTING RANGES		
	Archery Target Range - Figure 58		



SECTION 1. INTRODUCTION

1-1 PURPOSE AND SCOPE.

This manual provides a comprehensive reference source for outdoor sports facilities that contains information required for the planning and design of these facilities. Information is provided for site adaptation in an outline text of planning and design criteria opposite an accompanying page of definitive drawings. The scope of this manual covers those outdoor sports and games most commonly played for competition and/or recreation by military and civilian personnel.

1-2 APPLICATION.

Layouts and construction details in this manual will serve as guidance material. They are based on the latest available rules as indicated by the date after the name of each sports organization or other source of rules. Actual construction drawings should be prepared by design professionals through selection of the appropriate layouts and details and their site adaptation with proper grading and drainage to fit local conditions. Changes in playing rules may affect the dimensions and shapes of outdoor sports facilities. Therefore, the latest official rules of the governing body for each sport should be checked and the project drawings prepared in conformance with those rules.

1-3 REFERENCES.

Following is a list of Government Regulations, Manuals and Guide Specifications which are applicable, in addition to the official rules of governing sports organizations, to the design and construction of outdoor sports facilities.

- a. DOD 4270.1-M, Department of Defense Construction Criteria Manual.
- b. AR 28-1, Army Recreation Services.
- c. AFM 215-2, Air Force Sports Manual.
- d. AFM 86-2, Standard Facility Requirements.
- e. AFM 88-15, Standard Outline Specifications for Air Force Facilities.

- f. BUPERSINST 1710.11, Navy Special Services Manual.
- g. OCE Guide Specification, CE-1000, Playing Surfaces for Outdoor Sports Facilities.
- h. Military Construction Guide Specification, MCGS 02711, Fence, Chain-link.
- i. Illuminating Engineering Society Lighting Handbook, Illuminating Engineering Society, 345 East 47th Street, New York, N. Y. 10017.

1-4 COOPERATING ORGANIZATIONS.

The initial impetus for the manual came from meetings held in the spring of 1973 in which representatives of the U.S. Departments of Army, Navy, Air Force, Agriculture, and the National Recreation and Park Association discussed the revision and updating of the Folio of Standard Drawings for Outdoor Sports Facilities for the Office of the Chief of Engineers, Department of the Army. Matching funds were obtained from the Departments of the Navy and Air Force along with additional funds from the Department of the Army, to finance this joint publication on Planning and Design of Outdoor Sports Facilities. The Department of Agriculture, through its Extension Service and its Soil Conservation Service, and the National Recreation and Park Association, expressed interest in a manual of this type and participated in the organization and review of the project.

1-5 GENERAL INTRODUCTORY INFORMATION.

For the purposes of the manual, an outline text of planning and design criteria applicable to all the sports contained herein was developed. The typical criteria categories are: Name of Sports Organization, Recommended Area, Size and Dimension, Orientation, Surface and Drainage, and Special Considerations. Additional considerations in the design and planning of some sports facilities are discussed below.

Lighting Requirements.

If it is desirable to provide lighting to extend the usable playing time of a sports facility and justifiable in view of the Government Energy Reduction Program, the current edition of the Recommended



Lighting Practices for Sports Lighting, published by the Illuminating Engineering Society, should be consulted. Illumination levels are provided for various classes of sports.

b. Suggested Support Facilities.

Another factor which may influence the planning and design of sports facilities is the availability of various support facilities.

(1)

Toilet facilities for participants must be available in some form. These may be provided by individual dwelling units for facilities that serve housing areas or by self-contained structures. Public toilets and a drinking fountain should be available at general recreation areas. Shower and locker facilities should be provided near sports facilities used for competitive events. Additional public toilets would be required for spectators at such events.

(2)

Walks should be provided for access to each sport facility. The size and pavement surface would be dependent on the nature of the activity and the anticipated volume of pedestrian traffic.

(3)

Parking should be provided for the participants and, in some cases, the spectators for certain sports. The quantity of parking is subject to space allowances in DOD 4270.1-M, and is also dependent on the number of players for the sport, the anticipated spectator attendance and the location of the facility. The parking area should include provision for bicycles, motorcycles and automobiles.

(4)

A grandstand, bleachers or other form of observation structure may also be required to provide properly for some spectator sports. The number of seats and location will be dependent on the particular sport. The structure may be portable in nature.

(5)

Storage facilities for the safe keeping of implements, supplies and other equipment required for the support of a sport activity should

be provided near the playing area. This unit may also house pertinent maintenance equipment required for a particular sport.

(6)

Design of all facilities should consider the needs of the handicapped, especially where spectators are involved.

(7)

Refreshment concession facilities should be considered for outdoor sport complexes and where there are large numbers of spectators. The size of the concession facility may vary from a vending machine concept to a hot service area, depending on the anticipated need or use.

c. Soil Considerations.

The existing soils of a given area may affect the planning, design and maintenance of sports facilities for that area. Removal, replacement or alteration of the existing material may be required.

(1)

For sports played on natural turf surfaces, special consideration must be given to the nutrient qualities of the topsoil, as well as to the drainage characteristics of the subsoils, in order to obtain the best possible playing surface.

(2)

For sports requiring a paved surface of concrete, bituminous or other hard material, the sub-base for the paving type required should be of inorganic material and well drained to prevent frost heave.

(3)

For any structure, such as the One, Three and Four Wall Handball Walls, the bearing capacity of the soils must be determined and the design modified or the facility moved if the bearing capacity is less than the design criteria.

(4)

Soils information is available from local representatives of the Soil



Conservation Service, U.S. Department of Agriculture. Mapping is generally done on a county basis and the soils are rated for usability as to structures and recreational land uses.

d. Metric Conversions.

Many sports contained in the manual are dimensioned in both metric and English measures. Metric measure is used when the sport originated in a European country and when the governing sports organization recognizes the international rules. In these sports the playing area is governed by the metric measurement, and the English equivalent is shown as a convenience in laying out the area. Although the metric system will eventually replace the English system of measurements, many sports organizations do not yet recognize the metric system in their official playing rules and regulations. Therefore, their playing areas are dimensioned only in the English system of measurement. Appendix B contains tables for conversion from English measure to metric and vice versa.

1-6 PROPONENT AND USER COMMENTS.

The proponent agency of this manual is the Office of the Chief of Engineers, Department of the Army. Users are invited to send comments and suggested improvements, indicating referenced page, paragraph, line, figure, detail and specific recommendations, to HQDA (DAEN-MCE-P) WASH DC 20314.

•

SECTION 2 SPORTS COURTS AND FIELDS

2 - 1

SPORTS COURTS

BADMINTON

NAME OF SPORTS ORGANIZATION

American Badminton Association (ABA) 1972-73.

RECOMMENDED AREA

Ground space is 1620 square feet minimum to edge of pavement.

SIZE AND DIMENSION

Singles court is 17' x 44', doubles court is 20' x 44' with a 5'-0" minimum unobstructed area on all sides.

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

Surface is to be concrete or bituminous material with optional protective colorcoating for permanent installation.

Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of 1" in 10".

Badminton may be played on a turf court, for general recreation use with surface drainage as described above at a minimum slope of 2% and adequate underdrainage.



8'-6"

LEFT HALF COURT 5'-0"MIN. 1'-6"

SIDE BOUNDARY LIN (DOUBLES)

(SINGLES)

SIDE BOUNDARY LINE

EDGE OF PAVEMENT

1'-6"

POST

20'-0" (DOUBLES)

17'-0" (SINGLES)

NET

SHORT SERVICE LINE

LONG SERVICE LINE (DOUBLES)

LINE

BACK BOUNDARY

RIGHT HALF

8'-6"

RIGHT HALF

COURT

LEFT HALF COURT

NOTES:


All measurements for court markings are to the outside of lines except for those involving the center service line which is equally divided between right and left service courts.

All court markings to be 1 $\frac{1}{2}$ " wide and preferably white or yellow in color.

Minimum distance between sides of parallel courts to be 5'-0".

For net post details see figure 64 or 65.

For surfacing details see figure 70.

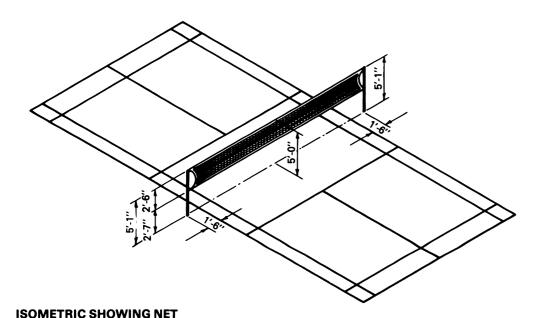

COURT LAYOUT

5'-0" MIN.

13'-0''

9-,9

.0'.9 .0'.9'

13′-0′′

5.-6

2,-0,, MIN

5'-0" MIN.

1'-6"



BASKETBALL (AAU)

NAME OF SPORTS ORGANIZATION

Amateur Athletic Union, (AAU), 1974, (International Competition).

RECOMMENDED AREA

Ground space is 448 square metres minimum to 540 square metres recommended, including clear space.

SIZE AND DIMENSION

Playing court is 14 metres x 26 metres with an unobstructed space of 1 metre minimum to 2 metres recommended on all sides.

ORIENTATION

Preferred orientation is for the long axis to be north-south.


SURFACE AND DRAINAGE

Surface is to be concrete or bituminous material with optional protective colorcoating. Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of .02 metres in 3.05 metres (1" in 10').

SPECIAL CONSIDERATIONS

Safety — Backboard is to be 1.65 metres from support post. Post may be padded.






Backboard shall be of any rigid weather-resistant material.

The front shall be flat and painted white unless it is transparent.

If the backboard is transparent, it shall be marked with a .05M wide white line around the border and a .45 x .59M target area bounded with a .05M wide white line.

For details of backboard standards see Figure 66.




DETAIL - FREE THROW LANE

NOTES:

All dimensions are to inside edge of lines except as noted.

All lines to be .05M (2") wide.

For surfacing details see Figure 69.

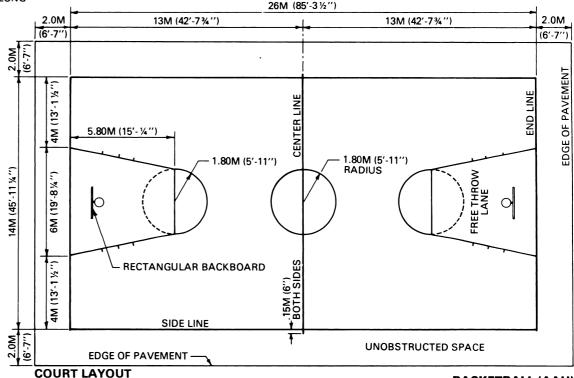

BASKETBALL (AAU)

FIGURE 2

BASKETBALL (NCAA)

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

High School - ground space is 5040 square feet minimum to 7280 square feet maximum.

Collegiate - ground space is 5600 square feet minimum to 7980 square feet maximum.

SIZE AND DIMENSION

High School recommended court is 84' x 50' with a 10' unobstructed space on all sides (3' minimum).

Collegiate recommended court is 94' x 50' with a 10' unobstructed space on all sides (3' minimum).

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE


Surface is to be concrete or bituminous material with optional protective colorcoating.

Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of 1" in 10'.

SPECIAL CONSIDERATIONS

Safety - Backboard and goal support should have a minimum 32" overhang and post may be padded if desired.

Bottom edge and lower sides of rectangular backboard must be padded.




Backboard shall be of any rigid weather-resistant material.

The front surface shall be flat and painted white unless it is transparent.

If the backboard is transparent, it shall be marked with a 3" wide white line around the border and an 18"x24" target area.

If the backboard is transparent, it shall be marked with a 3" wide white line around the border and an 18"x24" target area bounded with a 2" wide white line.

For backboard standard details see figure 66.



FAN SHAPED BACKBOARD

NOTES:

The color of the lane space marks and neutral zone marks shall contrast with the color of the bounding lines.


The midcourt marks shall be the same color as the bounding lines.

All lines shall be 2" wide. (neutral zone excluded).

All dimensions are to inside edge of lines except as noted.

For surfacing details see figure 70.

RECTANGULAR BACKBOARD

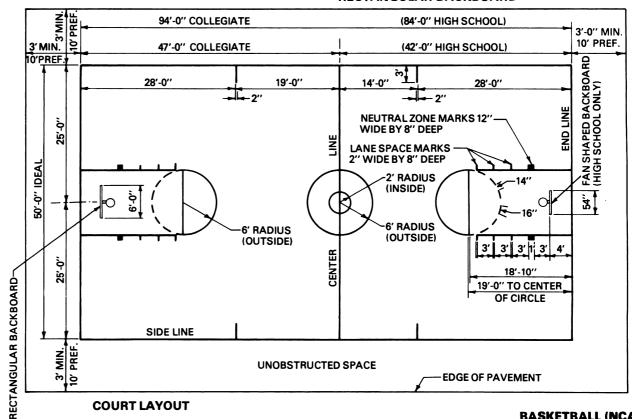

BASKETBALL (NCAA)

FIGURE 3

BIDDY BASKETBALL

NAME OF SPORTS ORGANIZATION

Biddy Basketball Association, Inc.

RECOMMENDED AREA

Ground space is 2,400 square feet to 3,036 square feet, including clear space.

SIZE AND DIMENSION

Playing court is 46'-0" to 50'-0" wide and 84'-0" long with an unobstructed space of at least 3 feet recommended on all sides.

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE


Surface is to be concrete or bituminous material with optional protective colorcoating.


Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of 1" in 10".

SPECIAL CONSIDERATIONS

Safety - Backboard support standard is to be a minimum of 2 feet, preferably 4 feet, outside of the court area. Post may be padded.



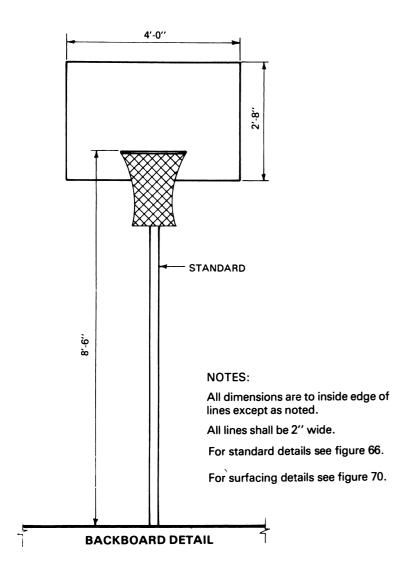

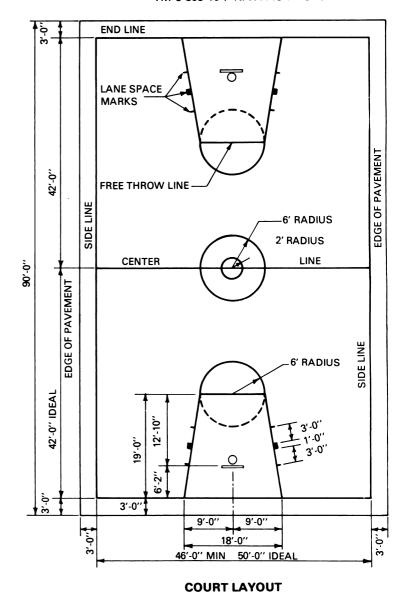

BIDDY BASKETBALL

FIGURE 4

Digitized by Google

GOAL-HI BASKETBALL

NAME OF SPORTS ORGANIZATION AMF Voit Corporation, 1974.

RECOMMENDED AREA

Ground space minimum is 1256 square feet; maximum is 2827 square feet.

SIZE AND DIMENSION

Playing court is to be an Outer Court circle with a minimum radius of 20'-0" and a maximum radius of 30'-0", surrounding an Inner Court circle with a minimum radius of 10'-0" and a maximum radius of 15'-0".

ORIENTATION

Optional.

SURFACE AND DRAINAGE

Concrete or bituminous surface may be used for minimum maintenance, but a resilient synthetic surface is preferred for safety and comfort. Minimum slope is 1" in 10' for drainage in any direction.




All court markings to be 2" wide.


For surfacing details see figure 69.

Goal Hi standard may be permanently mounted, removable flush mounted or portable as shown.

For fixed or removable post details see figures 64 or 65.



SECTION OF GOAL HI STANDARD

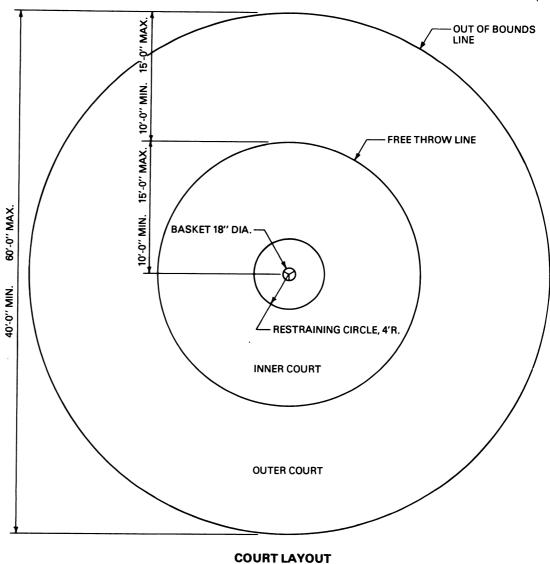

GOAL HI BASKETBALL

FIGURE 5

BOCCIE BALL

NAME OF SPORTS ORGANIZATION

General Sportcraft Company, Ltd., 1974.

RECOMMENDED AREA

Ground space is 1824 square feet to 2816 square feet.

SIZE AND DIMENSION

Overall court dimensions are 13'-0" to 19'-6" wide by 78'-0" to 92'-0" long. Additional space of at least 3'-0" on each side and 9'-0" on each end is recommended.

ORIENTATION

Preferred orientation is for the long axis to be north-south although it is of minor importance.

SURFACE AND DRAINAGE

Surface is to be preferably turf, although a mixture of sand and clay may be used.

Drainage may be in any direction at a recommended slope of 1% for turf and level for sand-clay with underdrainage.


SPECIAL CONSIDERATIONS

Optional low wooden barrier should be provided at each end and/or side of court.



Court markings to be $2^{\prime\prime}$ wide linen tape held in place with metal pins.

For surfacing details see figure 70.

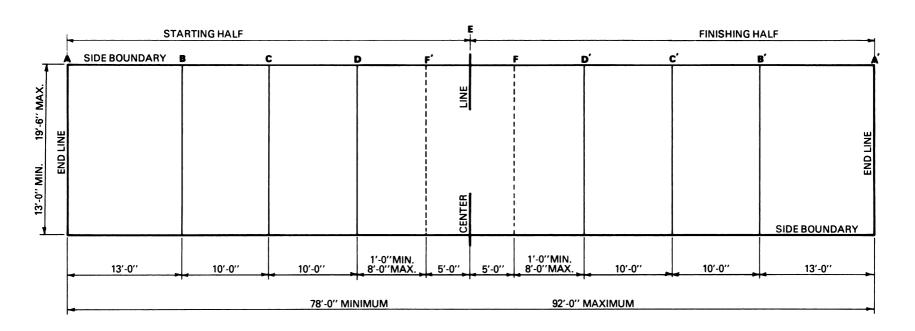

COURT LAYOUT

CROQUET

NAME OF SPORTS ORGANIZATION

National Croquet Association, Inc., (NCA), 1963

RECOMMENDED AREA

Ground space is 3,000 square feet.

SIZE AND DIMENSION

Playing area is 35' x 70', plus minimum 2'-6" on each end and side.

ORIENTATION

Orientation is not critical and may be adjusted to suit local topographic conditions.

SURFACE AND DRAINAGE

Playing surface is to be turf closely cropped and rolled with a maximum 2% slope (preferably level) and adequate underdrainage.


Arches are ½" dia. steel rod- 3-3/8" wide and 9" above the ground when in place.

Stakes shall be made of steel and shall be firmly anchored. They shall be 11" high and set $1\,\%$ " outside the playing line half way between the end corners.

Boundary lines are marked with strong cotton twine held by corner staples.

Playing lines may be either imaginary, marked with white chalk or with smaller twine wired close to the ground.

For surfacing details see figure 70.

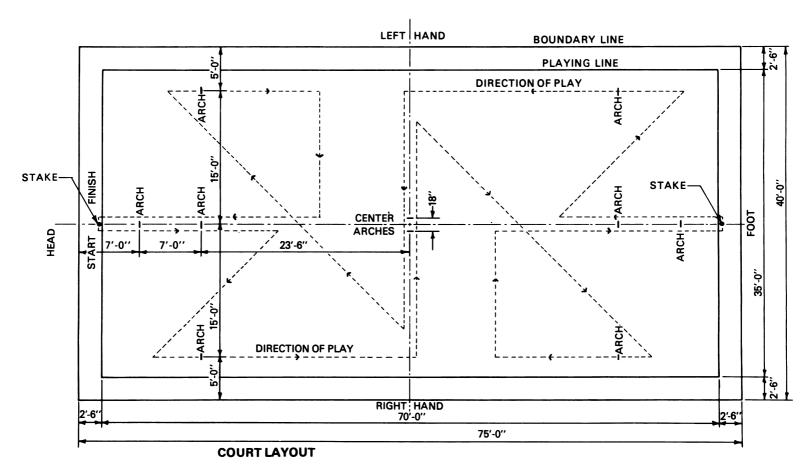

ONE WALL HANDBALL

NAME OF SPORTS ORGANIZATION

United States Handball Association, (USHA), 1974.

RECOMMENDED AREA

Ground space is 1665 square feet plus walls and footings.

SIZE AND DIMENSION

Playing court is 20'-0" wide by 34'-0" long plus a required 11'-0" minimum width of surfaced area to the rear and a recommended 8'-6" minimum width on each side. Courts in battery are to be a minimum of 6'-0" between courts.

ORIENTATION


Preferred orientation is for the long axis to be north-south with the wall at the north end.

SURFACE AND DRAINAGE

Surface is to be smooth concrete with a minimum slope of 1" in 10' from the wall to the rear of the court.

SPECIAL CONSIDERATIONS

Fencing - Court area preferably should be fenced with a 10' high chain link fence.

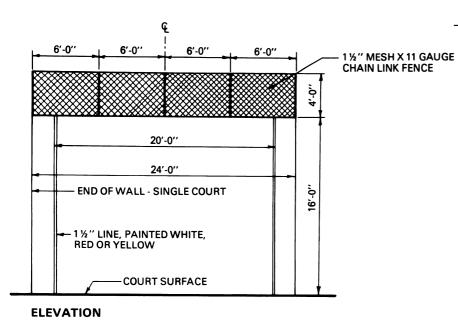


Court markings 1 ½" wide lines painted white, red or yellow.

For surfacing details see figure 70.

For wall construction details see figure 67.

For fence details see figure 63.

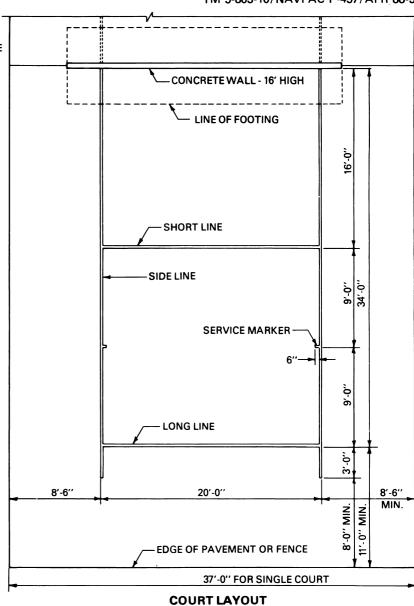

ONE-WALL HANDBALL

THREE AND FOUR WALL HANDBALL

NAME OF SPORTS ORGANIZATION

United States Handball Association, (USHA), 1974.

RECOMMENDED AREA

Ground space for four wall handball is 800 square feet, plus walls and footing. Allow an additional 200 square feet for three wall handball.

SIZE AND DIMENSION

Playing court is 20'-0" wide by 40'-0" long plus a minimum 10'-0" to the rear of the three wall court. Overhead clearance required is 20'-0" minimum.

ORIENTATION

Preferred orientation is for the long axis to be north-south with the front wall at north end.

SURFACE AND DRAINAGE

Surface is to be smooth concrete preferably with a minimum slope of 1" in 10' from front to rear of the court.


SPECIAL CONSIDERATIONS

Alternate Four Wall Court - Layout is the same as for three wall with the exception of a minimum 12'-0" high back wall at the rear of the court (long line) and necessary wall footings.


Special provisions for drainage must be made and access provided through the back wall for four wall courts.

Fencing - An optional 10' high chain link fence may be provided at the rear of the pavement for three wall courts.



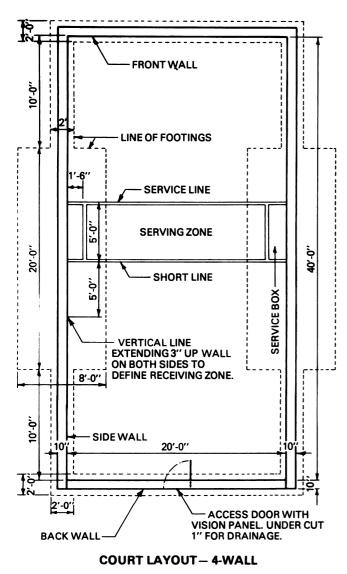

All court markings to be 1 ½" wide and painted white, red or yellow. For surfacing details see figure 69. For wall construction details see figure 68.

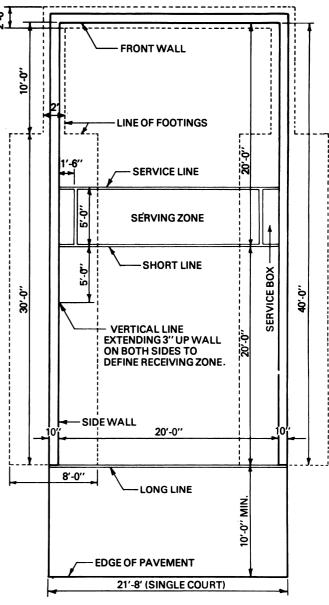

COURT LAYOUT - 3-WALL

THREE AND FOUR WALL HANDBALL

FIGURE 9

HOPSCOTCH

NAME OF SPORTS ORGANIZATION AMF Voit Corporation, 1974.


RECOMMENDED AREA Ground space is 62.5 square feet.

SIZE AND DIMENSION
Playing court is 5'-0" wide by 12'-6" long.

ORIENTATION Optional.

SURFACE AND DRAINAGE

Surface is to be concrete or bituminous material with a lateral slope of 1" in 10' and a longitudinal slope of 1" in 10' minimum.

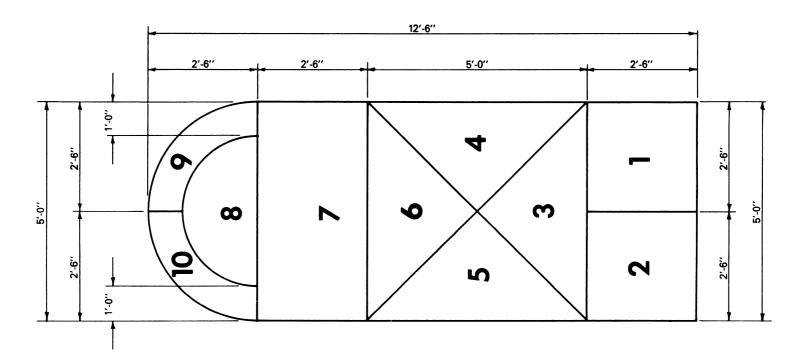

COURT LAYOUT

NOTES:

All lines to be 1 $\frac{1}{2}$ " wide painted with white or black acrylic paint to contrast with court surface.

For surfacing details see figure 70.

HOPSCOTCH
FIGURE 10
Digitized by Google

HORSESHOES

NAME OF SPORTS ORGANIZATION

National Horseshoe Pitchers' Association of America, (NHPAA), 1974.

RECOMMENDED AREA

Ground space is 1400 square feet, including clear space.

SIZE AND DIMENSION

Playing court is 10'-0" x 50'-0" plus a recommended 10' minimum unobstructed area on each end and a 5' minimum wide zone on each side.

ORIENTATION

Recommended orientation is for the long axis to be north-south.


SURFACE AND DRAINAGE

Surface of playing area, except for boxes and optional concrete walkways, should be turf. Area should be pitched to the side at a maximum slope of 2%. Elevation and slant of steel pegs should be between 2" and 3" and equal.

SPECIAL CONSIDERATIONS

Boxes are to be filled with gummy potter's or blue clay.

Safety: A 2'-0" high backstop should be constructed at the end of the box to intercept overthrown or bounding shoes.

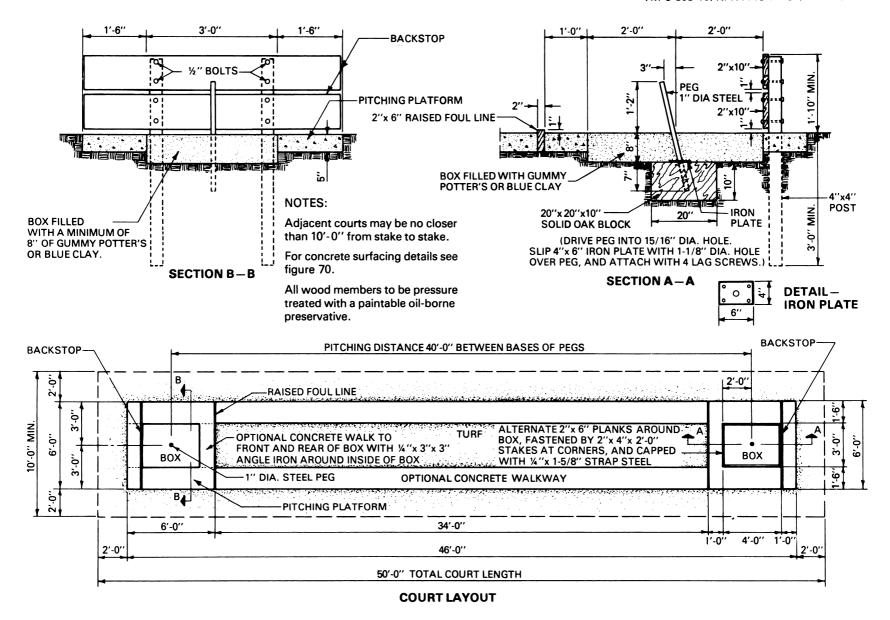

HORSESHOES

FIGURE 11

ICE HOCKEY

NAME OF SPORTS ORGANIZATION

Amateur Hockey Association of the United States, (AHA), 1974.

RECOMMENDED AREA

Ground space is 22,000 square feet, including support area.

SIZE AND DIMENSION

Playing rink is 85'-0" wide by 200'-0" long, plus an additional 5,000 square feet of support area.

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

The ice surface should be level over either sand-clay or bituminous surface. Provisions for drainage should be made on the surface beneath the ice and around the rink.

SPECIAL CONSIDERATIONS

Ice: Unless situated in northern climates, provisions for artificial ice will be required.



NOTES: The rink must be at least 185'x85', ideal 200'x85'.


The rink shall be surrounded by a wooden wall or fence known as the "BOARDS" which shall extend not less than 40" nor more than 48" above the level of the ice surface. Ideal 42".

The surface of the boards facing the ice shall be smooth and free from obstructions. All access doors to the playing surface must swing away from the ice surface.


A protective screening of heavy gauge wire or safety glass is recommended above the boards, except for the bench areas, for the protection of spectators around the rink.

The center line and the two blue lines shall extend across the rink and vertically to the top of the boards.

Surface to be flooded may be sand-clay or bituminous material, (see figure 70).



ISOMETRIC OF GOAL

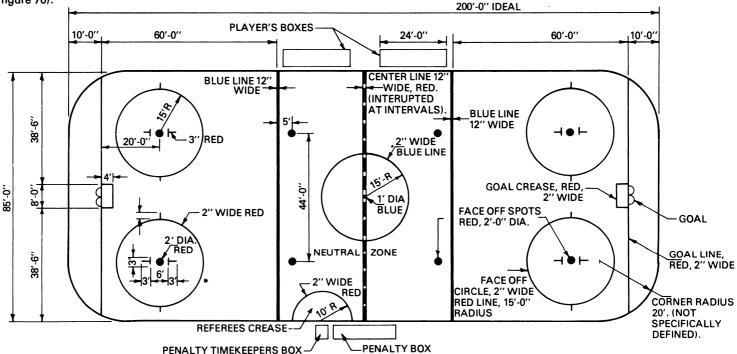

RINK LAYOUT

FIGURE 12

ICE HOCKEY RINK

LAWN BOWLING

NAME OF SPORTS ORGANIZATION

American Lawn Bowls Association, (ALBA), 1973-1974.

RECOMMENDED AREA

Square green with six rinks is 12,996 square feet minimum to 17,424 square feet maximum.

SIZE AND DIMENSION

Square green is 110' minimum and 125' maximum on each side. Additional width of 2'-0" minimum to 3'-6" maximum is required on front, rear and sides for ditch and backslope. Rink width minimum is 14'-0", maximum 19'-0". Rink length minimum is 110'-0", maximum 125'-0".

ORIENTATION

Optional.

SURFACE AND DRAINAGE


Surface should be of closely cropped bent grass or sand-clay.

Entire green should be level, with adequate underdrainage.

SPECIAL CONSIDERATIONS

Ditch - Depth minimum 2", maximum 8" below surface of green. Width minimum 8", maximum 15".



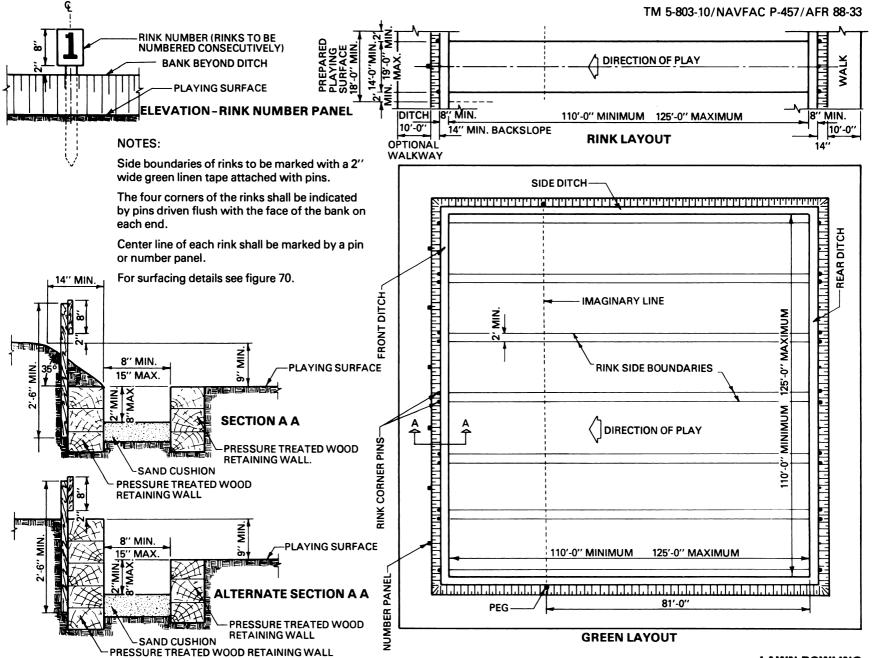

LAWN BOWLING

FIGURE 13

ROQUE

NAME OF SPORTS ORGANIZATION

The American Roque League Incorporated (ARL), 1959.

RECOMMENDED AREA

Ground space is 1800 square feet minimum, plus curb.

SIZE AND DIMENSION

Playing court is 30'-0" wide by 60'-0" long.

ORIENTATION

Preferred orientation is for the long axis to be north-south.


SURFACE AND DRAINAGE

Surface is to be level and sand-clay mixture.

Drainage is to be through perimeter system and/or through underdrains.

SPECIAL CONSIDERATIONS

Concrete curb is to be provided on all sides.

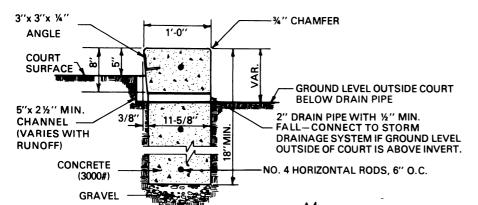


Boundary lines are marked by a light depression in playing surface without raising adjacent soil.

Arches are 5/8" dia. steel rod, 3-3/8" wide and 8" above the surface and set in 8"x 15"x 6" concrete anchors.

Stakes are ¾" dia. steel, set rigidly in the ground and extending 2" above the surface.

Playing surface should be hard, smooth and level sand-clay, (see figure 70.)

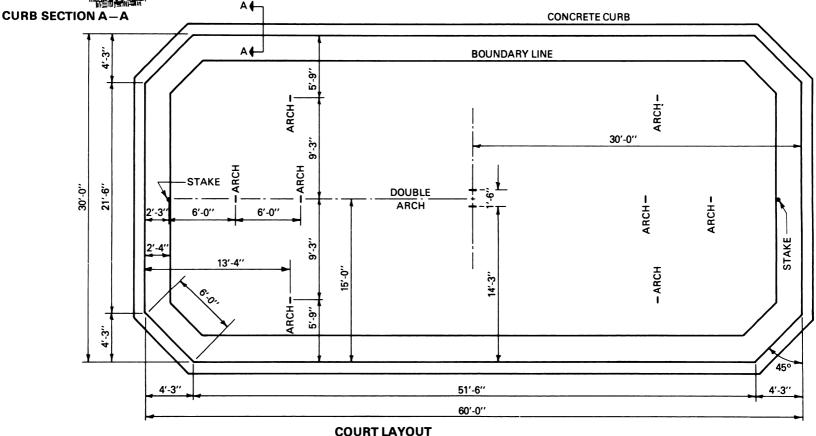

2 - 29

ROQUE

SHUFFLEBOARD

NAME OF SPORTS ORGANIZATION

National Shuffleboard Association, (NSA), 1974.

RECOMMENDED AREA

Ground space is 312 square feet minimum.

SIZE AND DIMENSION

Playing court is 6'-0" x 52'-0" plus a recommended minimum of 2'-0" on each side or 4'-0" between courts in battery.

ORIENTATION

Recommended orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

Surface is to be concrete with a burnished finish.

Court surface is to be level with drainage away from the playing surface on all sides.

SPECIAL CONSIDERATIONS

Secure covered storage for playing equipment should be provided near the court area.



All dimensions are to centers of lines and to edge of court.


Maximum line width 1½", minimum ¾".


Lines and Figures "10", "8", "7" & "10 OFF" should be marked with black shoe dye or black acrylic paint.

Court to be constructed of concrete without expansion joints.

A depressed alley at least 24" wide and not less than 4" deep at midcourt, should be constructed between courts and on the outside of end courts.

The alley should slope 1" in the first 6' of the length of the alley from each base line, then slope to a minimum depth of 4" at midcourt where a suitable water drain should be provided.



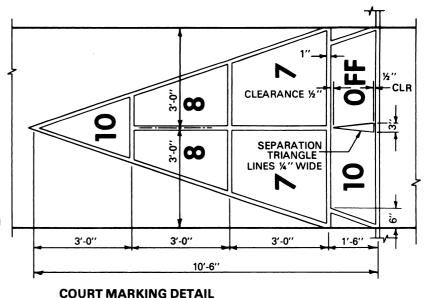

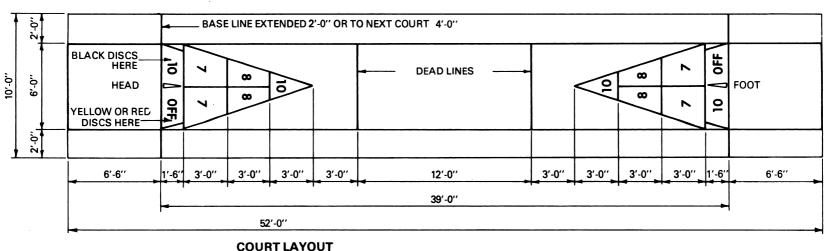


FIGURE 15
Digitized by Google

SHUFFLEBOARD

DECK TENNIS

NAME OF SPORTS ORGANIZATION

General Sportcraft Company, Ltd., 1974.

RECOMMENDED AREA

Ground space is 1300 square feet including clear space.

SIZE AND DIMENSION

Singles court is 12'-0" by 40'-0". Doubles court is 18'-0" by 40'-0". Additional paved area at least 4'-0" on sides and 5'-0" on ends is recommended.

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

Surface is to be concrete or bituminous material with optional protective colorcoating.

Drainage is to be end to end, side to side, or corner to corner diagonally at a minimum slope of 1" in 10".

SPECIAL CONSIDERATIONS

Fencing - 10' high chain link fence is recommended on all sides of the court.




All measurements for court markings are to the outside of lines except for those involving the center service line, which is equally divided between right and left service court.

All court markings to be 1 ½" wide.


Fence enclosure, if provided, should be 1½" mesh, 11 gauge chain link. For fence details see figure 63.

For net post details see figure 64 or 65.

For surfacing details see figure 70.

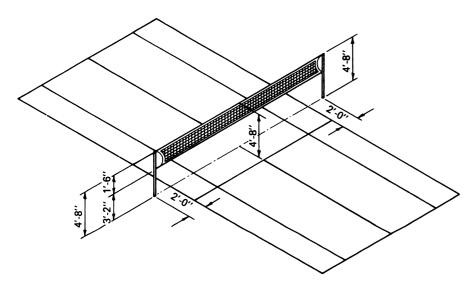

ISOMETRIC SHOWING NET

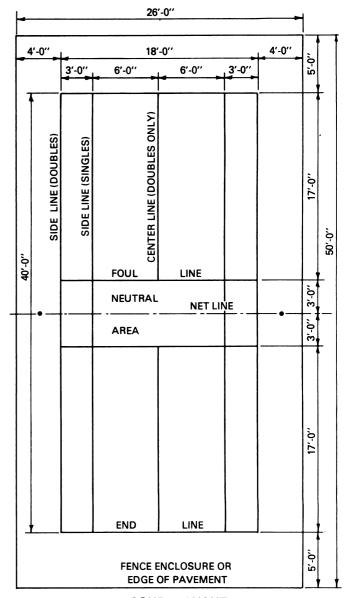

COURT LAYOUT

DECK TENNIS
FIGURE 16
Digitized by GOGIC

PADDLE TENNIS

NAME OF SPORTS ORGANIZATION

United States Paddle Tennis Association, (USPTA), 1974.

RECOMMENDED AREA

Ground space is 3200 square feet minimum to edge of pavement.

SIZE AND DIMENSION

Playing court is 20'-0" x 50'-0" plus a 15' minimum space on each end and a 10' minimum space on each side or between courts in battery.

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

Surface is to be concrete or bituminous material with optional protective colorcoating.

Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of 1" in 10'.

SPECIAL CONSIDERATIONS

Fencing - 10' high chain link fence is recommended on all sides of the court.




All measurements for court markings are to the outside of lines except for those involving the center service line, which is equally divided between right and left service court.


All court markings to be 1 1/2" wide.

Fence enclosure, if provided, should be $1\,\%\,''$ mesh, 11 gauge chain link. For fence details see figure 63.

For net post details see figure 64 or 65.

For surfacing details see figure 70.

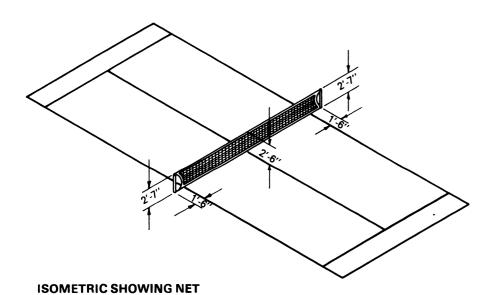

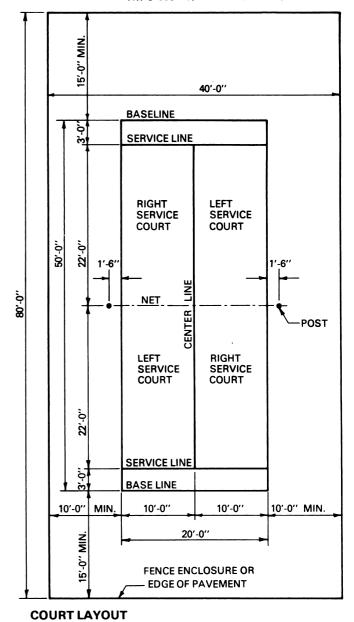

PADDLE TENNIS

FIGURE 17

PLATFORM TENNIS

NAME OF SPORTS ORGANIZATION

American Platform Tennis Association, (APTA), 1963-73.

RECOMMENDED AREA

Ground space is 1800 square feet to the playable perimeter fence.

SIZE AND DIMENSION

Playing court is 20'-0" x 44'-0" plus an 8'-0" space on each end and a 5'-0" space on each side.

ORIENTATION

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

Raised level platform is normally constructed of treated wood or aluminum superstructure with carriage set on concrete piers to permit construction on slopes.

Drainage is provided by $\frac{1}{4}$ " space between 6" deck planks or channels. Snow removal is facilitated by hinged panels (snow gates) between posts around bottom of perimeter fence.

SPECIAL CONSIDERATIONS

Tension fencing - 12' high, 16 gauge, hexagonal, galvanized, 1" flat wire mesh fabric must be provided on all sides of the court. Lights should be provided, since this game is played at night throughout the year. Heating units with fans under the platform are used in cold climates. Pre-fabricated courts are available from several manufacturers.

SIDE LINE (DOUBLES)

LINE (SINGLES)

11'-6"

2'-0" 5'-0"

BASE LINE

SERVICE LINE

FENCE

NOTES:


All measurements for court markings are to the outside of lines except for those involving the center service line, which is equally divided between right and left service court.

All court markings to be 2" wide.

Fencing required - 12'-0" high with 16-gauge hexagonal, galvanized 1" flat wire mesh fabric.

For net post details see manufacturers' literature.

Net height to be 3'-1" at posts and 2'-10" at center court.

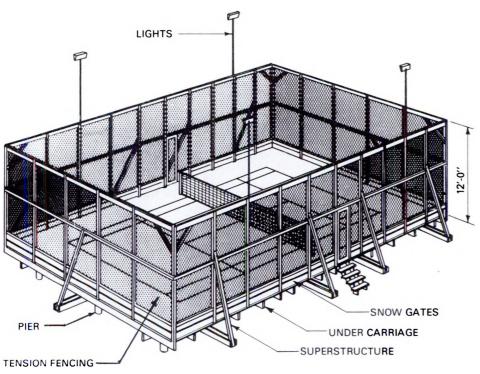

AND SERVICE LINE 12'-0" 1'-6" 44'-0' 60′-0″ LINE -POST ģ SERVICE LINE **BASE LINE** 5'-0" 8'-0" 8'-0" 20'-0" **EDGE OF PLATFORM** 30'-0" **COURT LAYOUT**

8,-0,

10'-0"

ISOMETRIC SHOWING FENCE (TYPICAL WOOD CONSTRUCTION)

PLATFORM TENNIS
FIGURE 18
Digitized by GOOGLE

TENNIS

NAME OF SPORTS ORGANIZATION

United States Lawn Tennis Association, (USLTA), 1974.

RECOMMENDED AREA

Ground space is 7200 square feet minimum.

SIZE AND DIMENSION

Playing court is 36' x 78' plus at least 12' clearance on both sides or between courts in battery and 21' clearance on each end.

ORIENTATION

Orientation of long axis is to be north-south.

SURFACE AND DRAINAGE

Surface may be concrete, or bituminous material with specialized protective colorcoating, or sand-clay.

Drainage may be from end to end, side to side, or corner to corner diagonally at a minimum slope of 1" in 10" for pavement and level for sand-clay with underdrainage.

SPECIAL CONSIDERATIONS

Fencing - Recommended 10' high chain link fence on all sides.

All measurements for court markings are to the outside of lines except for those involving the center service line which is equally divided between the right and left service courts.


All court markings to be 2" wide.


Fence enclosure, if provided, should be 10' high, 11 gauge, 1%" mesh chain link. For fence details see figure 63.

Minimum distance between sides of parallel courts to be 12'-0".

For net post details see figure 64 or 65.

For surfacing details see figure 70.

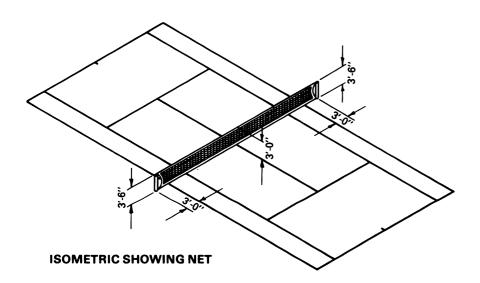

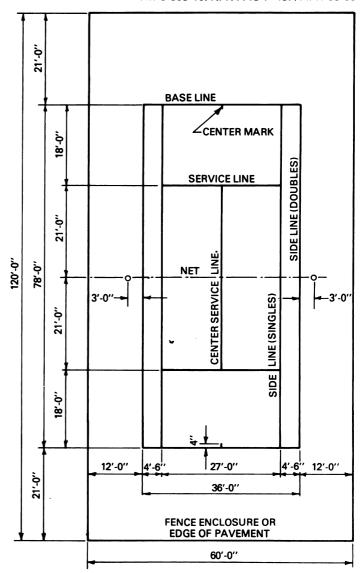

COURT LAYOUT

TENNIS
FIGURE 19
Digitized by Google

TETHER BALL

NAME OF SPORTS ORGANIZATION

General Sportcraft Company, Ltd., 1974.

RECOMMENDED AREA

Ground space is 314 square feet minimum to circumference of outer circle.

SIZE AND DIMENSION


Playing court is a circle 20'-0" in diameter. Pole height is 10'.

ORIENTATION

Recommended axis through playing zone is north-south.

SURFACE AND DRAINAGE

Concrete or bituminous surface may be used for minimum maintenance, but a resilient synthetic surface or wood chips with adequate underdrainage is preferred for safety and comfort. Minimum slope is 1" in 10' for drainage in any direction.

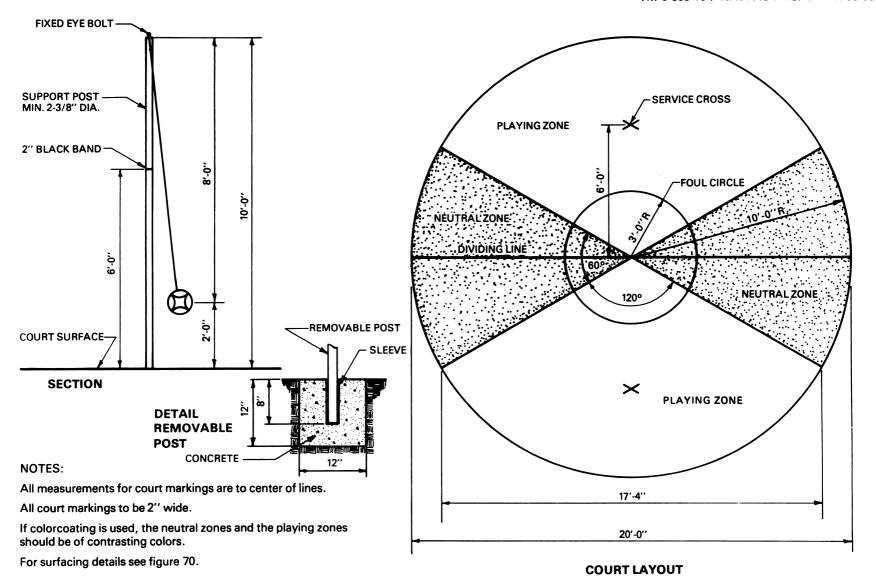

VOLLEYBALL

NAME OF SPORTS ORGANIZATION

United States Volleyball Association, (USVA), 1974.

RECOMMENDED AREA

Ground space is 4000 square feet.

SIZE AND DIMENSION

Playing court is 30' x 60' plus 6' minimum, 10' preferred, unobstructed space on all sides.

ORIENTATION

þ

Preferred orientation is for the long axis to be north-south.

SURFACE AND DRAINAGE

Recommended surface for intensive use is to be bituminous material or concrete, but sand-clay or turf may be used for informal play. Drainage is to be end to end, side to side or corner to corner at a minimum slope of 1" in 10'.

Digitized by Google


All measurements for court markings are to the outside of lines except for the center line.


All court markings to be 2" wide except as noted.

For surfacing details see figure 70.

Net height at center to be: men 8'-0", women 7'-4¼", high school 7'-0", elementary school 6'-6".

For net and post details see figure 64 or 65.

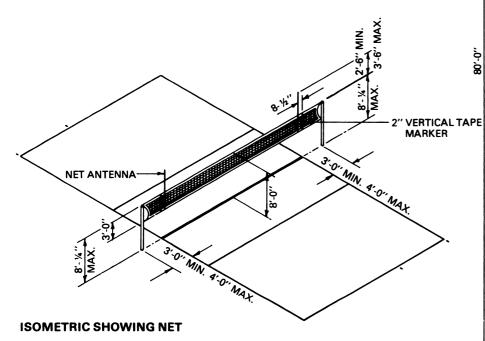

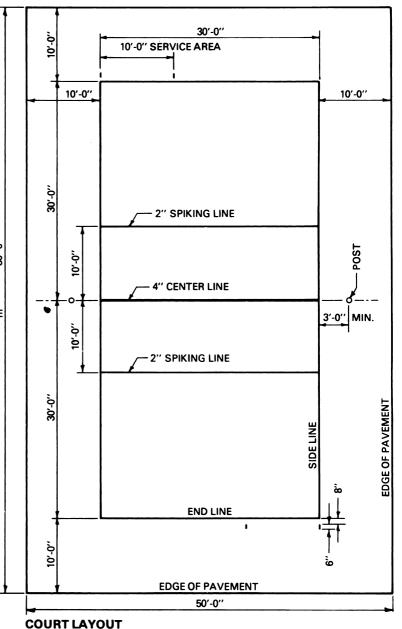

VOLLEYBALL

2 - 43 (next page is 2-45)



2-2

SPORTS FIELDS

OFFICIAL BASEBALL (13-15 yrs. and 16-18 yrs.) SENIOR LEAGUE BASEBALL (13-15 yrs.)

NAME OF SPORTS ORGANIZATION

The Official Playing Rules Committee, 1974. Babe Ruth Baseball, 1974. Senior League, Little League Baseball, Inc., 1974.

RECOMMENDED AREA

Ground space is 3.0 to 3.85 acres minimum.

SIZE AND DIMENSION

Baselines are 90'-0''. Pitching distance is 60'-6''. Pitcher's plate is 10'' above the level of home plate. Distance down foul lines is 320' minimum, 350' preferred. Outfield distance to center field is 400' + . For Senior League Baseball, recommended distance from home plate to outfield fence at all points is 300' + .

ORIENTATION


Optimum orientation is to locate home plate so that the pitcher is throwing across the sun and the batter is not facing it. The line from home plate through the pitcher's mound and second base should run east-northeast.

SURFACE AND DRAINAGE

Surface is to be turf. Infield may be skinned, and shall be graded so that the base lines and home plate are level.

SPECIAL CONSIDERATIONS

Backstop is to be provided at a minimum distance of 40' or preferably 60' behind home plate.

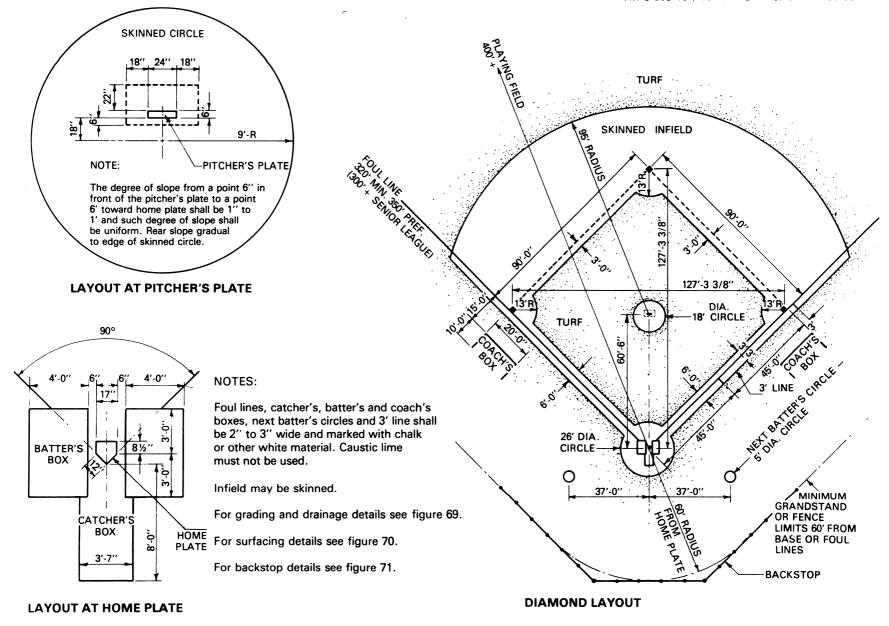

BASEBALL
FIGURE 22
Digitized by Google

BASEBALL, LITTLE LEAGUE (9-12 yrs.)

NAME OF SPORTS ORGANIZATION

Little League Baseball, Inc., 1974.

RECOMMENDED AREA

Ground space is 1.2 acres minimum.

SIZE AND DIMENSION

Baselines are 60'-0". Pitching distance is 46'-0". Pitcher's plate is 6" above the level of home plate. Distance down foul line is 200'. Outfield distance to pocket in center field is 200' to 250' optional.

ORIENTATION

Optimum orientation is to locate home plate so that the pitcher is throwing across the sun and the batter is not facing it. The line from home plate through the pitcher's mound and second base should run east-northeast.

SURFACE AND DRAINAGE

Surface is to be turf. Infield may be skinned, and shall be graded so that the base lines and home plate are level.

SPECIAL CONSIDERATIONS

Backstop is to be provided at a recommended minimum distance of 25' behind home plate.



LITTLE LEAGUE BASEBALL

FIELD HOCKEY

NAME OF SPORTS ORGANIZATION

United States Field Hockey Association, (USFHA), 1974.

RECOMMENDED AREA

Ground space is 64,000 square feet (1.5 acres) minimum.

SIZE AND DIMENSION

Playing field width is 180'-0". Length is 300'-0". Additional area recommended is 10'-0" minimum unobstructed space on all sides.

ORIENTATION


Preferred orientation is for the long axis to be northwest-southeast to suit the angle of the sun in the fall playing season, or north-south for longer periods.

SURFACE AND DRAINAGE

Surface it to be turf. Preferred grading is a longitudinal crown with a 1% slope from center to each side and adequate underdrainage. Grading may be from side to side or corner to corner diagonally if conditions do not permit the preferred grading.

SPECIAL CONSIDERATIONS

Goal is to be provided at each end of the playing field.

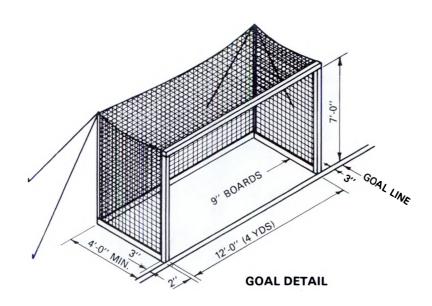


All measurements shall be made from the inside edge of lines marking boundaries.

Solid and broken lines shall be white, 3" wide and marked with a non-toxic material which is not injurious to the eyes or skin.

For grading and drainage details see figure 69.

For surfacing details see figure 70.

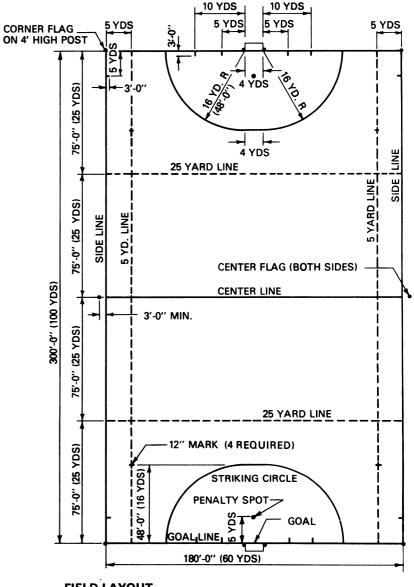

FIELD LAYOUT

FIELD HOCKEY

FIGURE 27

FLICKERBALL

NAME OF SPORTS ORGANIZATION

Rules furnished by United States Air Force.

RECOMMENDED AREA

Ground space is 17,600 square feet (.4 acre) minimum.

SIZE AND DIMENSION

Playing field width is 90'-0". Length is 160'-0". Goals are 15'-0" beyond each end line. Additional area recommended is 6'-0" minimum unobstructed space on all sides.

ORIENTATION


Preferred orientation is for the long axis to be northwest-southeast to suit the angle of the sun in the fall playing season, or north-south for longer periods.

SURFACE AND DRAINAGE

Surface is to be turf. Preferred grading is a longitudinal crown with a 1% slope from center to each side and adequate underdrainage. Grading may be from side to side or corner to corner diagonally if conditions do not permit the preferred grading.

SPECIAL CONSIDERATIONS

Goal is to be provided 15'-0" behind each end line.

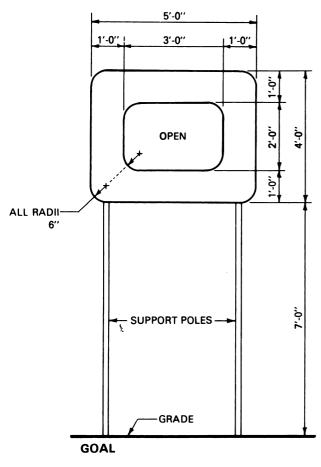


All measurements should be made from the inside edge of lines marking boundaries.

Lines shall be white and 3" wide and marked with a nontoxic material which is not injurious to the eyes or skin.

For grading and drainage details see figure 69.

For surfacing details see figure 70.

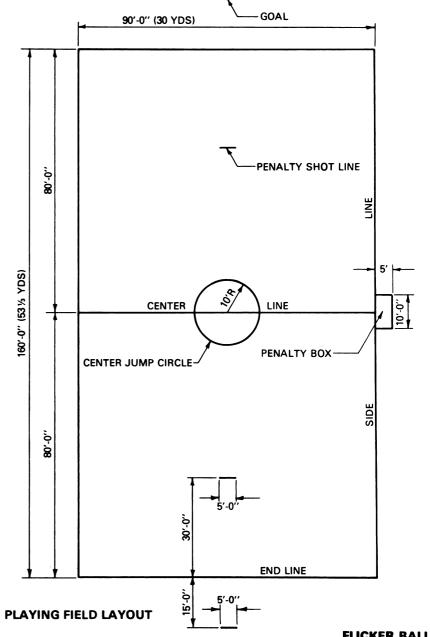

FLICKER BALL

FIGURE 28

FOOTBALL, (NCAA) Pop Warner Junior League Football

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974. Pop Warner Junior League Football, 1974.

RECOMMENDED AREA

Ground space is 64,000 square feet (1.5 acres) minimum.

SIZE AND DIMENSION

Playing field width is 160'-0". Length is 360'-0". Additional area required is 6'-0" minimum unobstructed space on all sides.

ORIENTATION

Preferred orientation is for the long axis to be northwest-southeast to suit the angle of the sun in the fall playing season, or north-south for longer periods.

SURFACE AND DRAINAGE

Surface is to be turf.

Preferred grading is a longitudinal crown with a 1% slope from center to each side and adequate underdrainage.

Grading may be from side to side or corner to corner diagonally if conditions do not permit the preferred grading.

SPECIAL CONSIDERATIONS

Goal posts are to be provided at each end of the playing field. Pylons are to be provided as required by rules.

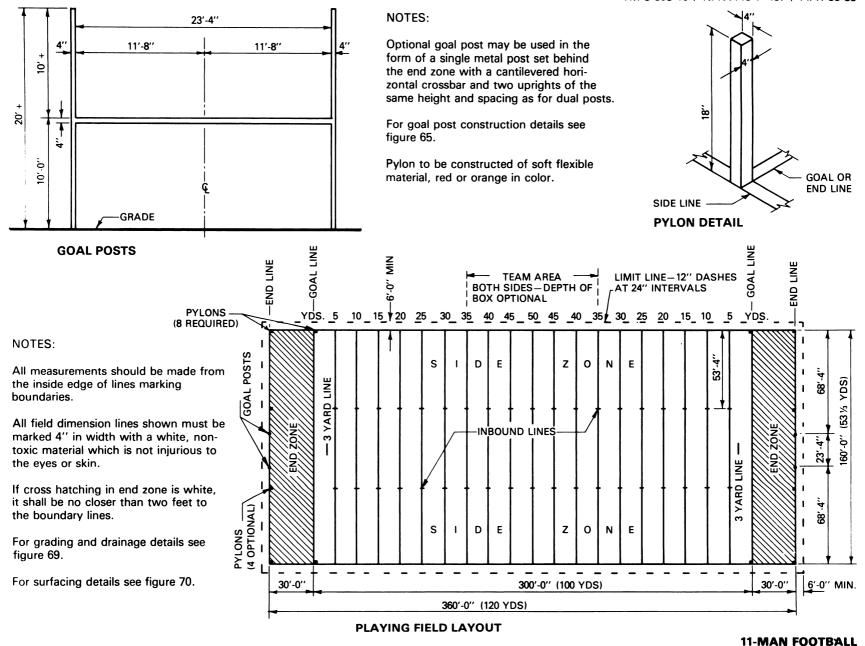


FIGURE 29
Digitized by Google

TOUCH AND FLAG FOOTBALL

NAME OF SPORTS ORGANIZATION

National Touch and Flag Football Rules, The Athletic Institute, 1971.

RECOMMENDED AREA

Ground space is 41,200 square feet (.94 acre) minimum.

SIZE AND DIMENSION

Playing field width is 120'-0". Length is 300'-0". Additional area recommended is 6'-0" minimum unobstructed space on all sides.

ORIENTATION

Preferred orientation is for the long axis to be northwest-southeast to suit the angle of the sun in the fall playing season, or north-south for longer periods.

SURFACE AND DRAINAGE

Surface is to be turf.

Preferred grading is a longitudinal crown with a 1% slope from center to each side and adequate underdrainage.

Grading may be from side to side or corner to corner diagonally if conditions do not permit the preferred grading.

SPECIAL CONSIDERATIONS

Goal posts are to be provided at each end of the playing field. Pylons are to be provided as required by rules.



Team handball goal posts and crossbar are metal or wood and painted on all sides in two contrasting colors. Goals will be firmly fixed to the ground with hooked stakes.


The goal line between the goal posts is the same width as the posts.

All field markings are 2" (5cm) wide and form part of the area they enclose.


Lines shall be marked with a white, non-toxic material which is not injurious to eyes or skin.

For grading and drainage details see figure 69.

For surfacing details see figure 70.

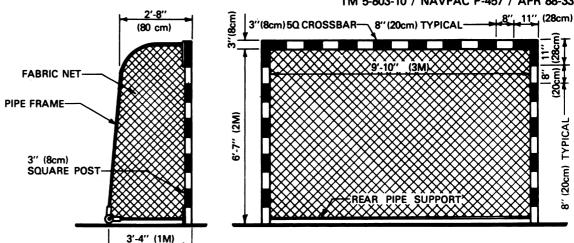

GOAL POSTS AND CROSSBAR

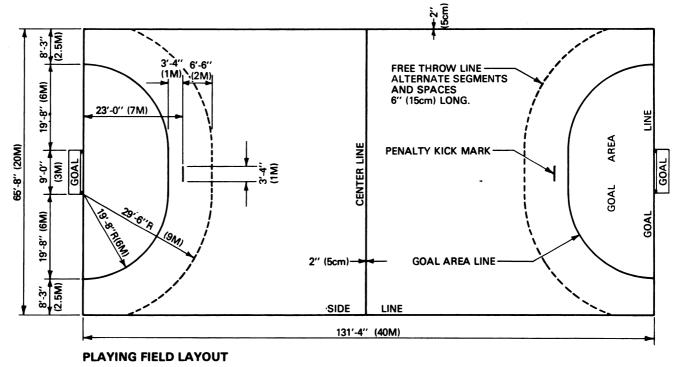

TEAM HANDBALL

FIGURE 39

.



14 MILE RUNNING TRACK

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is approximately 4.3 acres.

SIZE AND DIMENSION

Inside radius to face of curb is 106'-0". Track width is 32'-0" for eight 4-footwide lanes. Overall width is 276'-0". Overall length is 600.02'.

ORIENTATION

The track should be oriented so that the long axis falls in a sector from north-south to northwest-southeast with the finish line at the northerly end.


SURFACE AND DRAINAGE

Track surface is to be preferably bituminous material with a hot plant cushion course mix and optional protective colorcoating.

Maximum slopes for the running track are two percent (1:50) inward in the center of curves, one percent (1:100) inward in the straightways and one tenth on one percent (1:1000) in the running direction.


SPECIAL CONSIDERATIONS

Drainage must be provided for the track surface and optional football field, but will be dependent upon site grading.

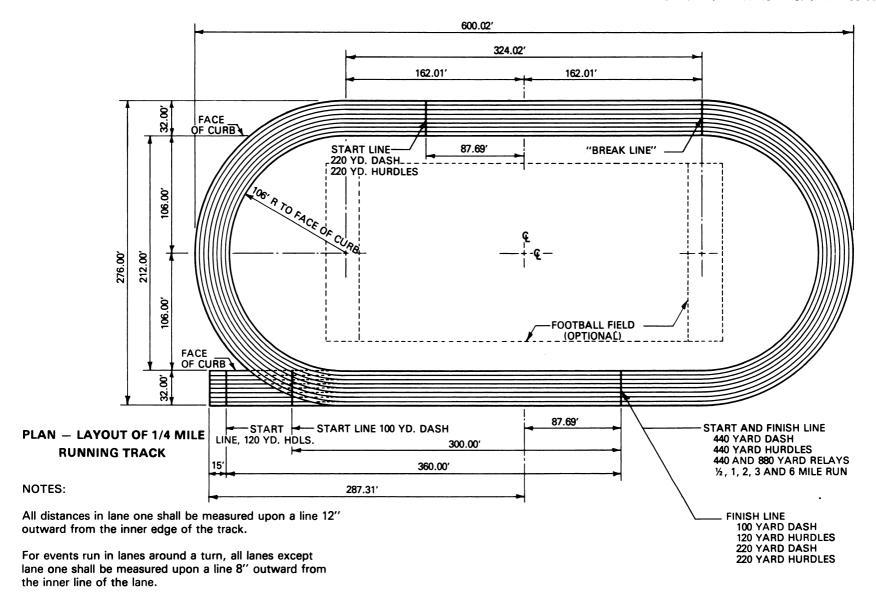

For lane marking details and typical section of running track see figure 41.

% MILE RUNNING TRACK
FIGURE 40
Digitized by GOGIE

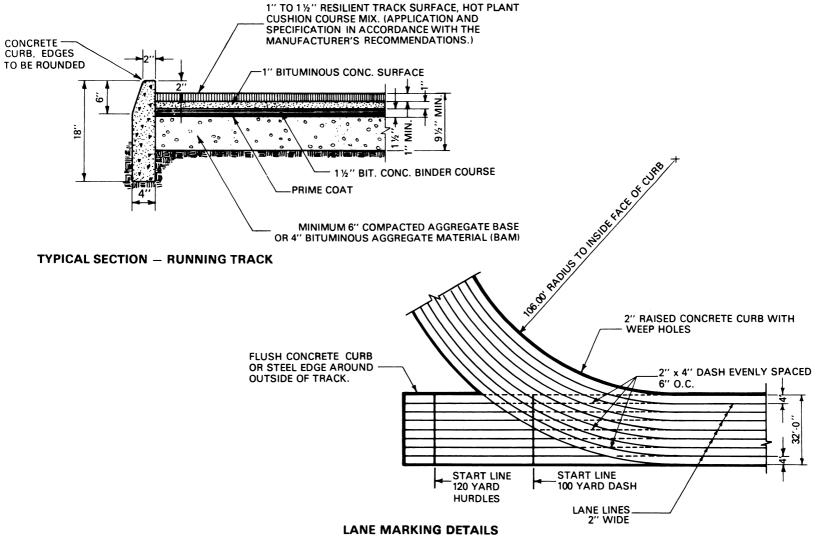


1/4 MILE RUNNING TRACK (MARKING DETAILS - 1)

FIGURE 41


All distances in lane one shall be measured upon a line 12" outward from the inner edge of the track.

For events run in lanes around a turn, all lanes except lane one shall be measured upon a line 8" outward from the

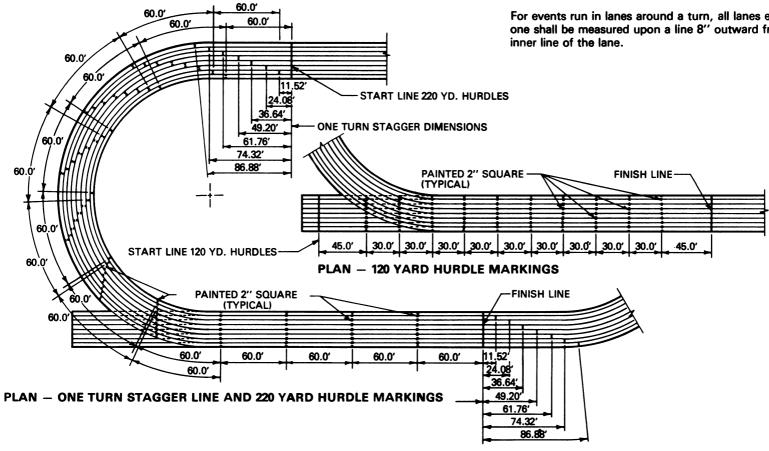

% MILE RUNNING TRACK (MARKING DETAILS-2)

FIGURE 42

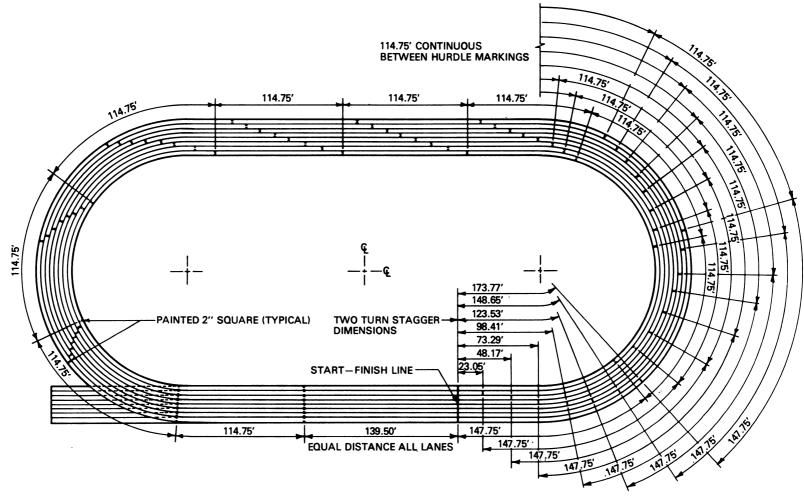


PLAN — TWO TURN STAGGER LINES AND 440 YARD HURDLE MARKINGS

All distances in lane one shall be measured upon a line 12" outward from the inner edge of the track.

For events run in lanes around a turn, all lanes except lane one shall be measured upon a line 8" outward from the inner line of the lane.

% MILE RUNNING TRACK (MARKING DETAILS—3) FIGURE 43

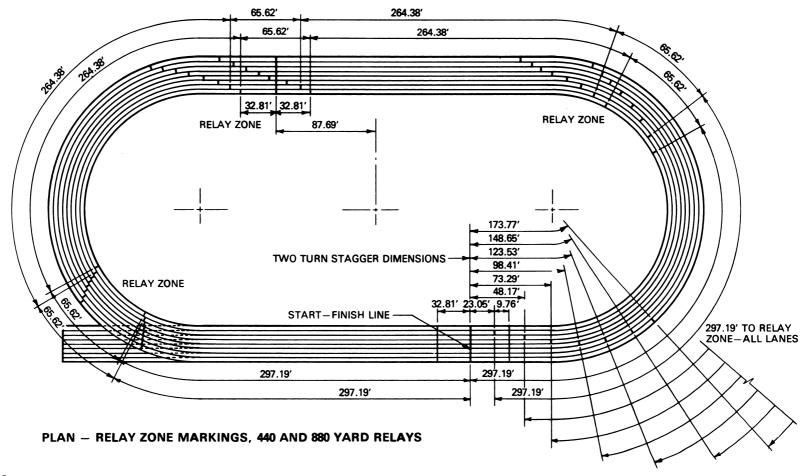

All distances in lane one shall be measured upon a line 12" outward from the inner edge of the track.

For events run in lanes around a turn, all lanes except lane one shall be measured upon a line 8" outward from the inner line of the lane.

% MILE RUNNING TRACK (MARKING DETAILS-4)

SHOT PUT

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 2100 square feet minimum.

SIZE AND DIMENSION

Shot put circle is 7'-0" (2.134M) in diameter. Throwing sector is 45° angle and 70' (21.33M) minimum radius.

ORIENTATION

Preferred orientation is for the throwing direction to be toward the northeast quadrant.

SURFACE AND DRAINAGE


Surface of inner circle is to be concrete or similar material.

Throwing sector is to be turf at the same level as the top of the metal ring.

SPECIAL CONSIDERATIONS

Stopboard must be firmly fixed so that its inner edge coincides with the inner edge of the shot put circle.

Sector flags are required to mark end of landing zone at distance required by the competition.

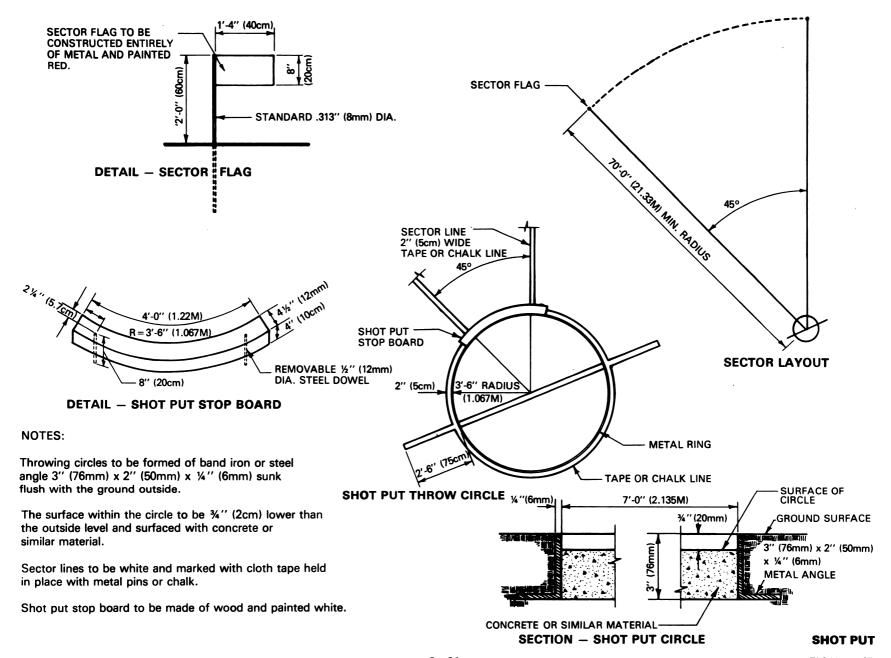

Digitized by GOOSIC

HAMMER THROW

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 33,500 square feet minimum.

SIZE AND DIMENSION

Hammer throw circle is 7'-0" (2.134M) in diameter. Throwing sector is 60° angle and 250' (76.20M) minimum radius.

ORIENTATION

Preferred orientation is for the throwing direction to be toward the northeast quadrant.

SURFACE AND DRAINAGE

Surface of inner circle is to be concrete or similar material.


Throwing sector is to be turf at the same level as the top of the metal ring.

SPECIAL CONSIDERATIONS

For safety all throws must be made from within an approved enclosure or cage.

Sector flags are required to mark end of landing zone at distance required by the competition.



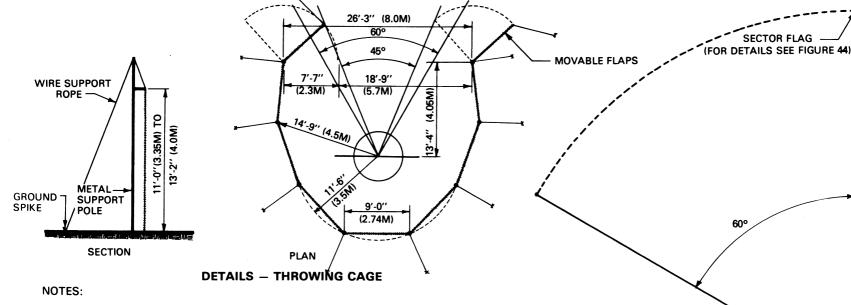

All discus and hammer throws must be made from an enclosure or cage to insure the safety of spectators.

The cage should be C shaped in plan, the diameter being 29'-6" (9.0M) with the opening through which the throw is made 26'-3" (8.0M) wide.

The height should not be less than 11 feet, but preferably 13'-2" (4.0M).

A wire cable, or series of metal struts, is suspended at a height of not less than 11 feet above the ground in the shape of a letter C. The cable or series of struts, is supported in a horizontal plane by 8 metal supports made in the shape of gallows, so that the C shape is formed by 7 straight panels, each 9'-0" (2.74M) wide. Two movable flaps 7'-7" (2.3M) are provided at the end of the C shape to afford adjustment for different throwing sectors.


The 8 metal supports are set into the ground with spikes or permanent sockets sunk to a depth of approximately 1 foot (30cm) and held in position with wire ropes.

A net 78'-2" (23.78M) long and 1 foot (0.3M) wider than the height of the struts, made of cord .5 inch (12.5mm) in circumference with 2 inch (50mm) meshes is suspended from the wire or metal strut framework with the lower edge resting on the ground and turned inward. The inner edge should be weighted at intervals with sand bags.

Throwing circles to be formed of continuous band iron or steel angle 3" (76mm) x2" (50mm) x ¼" (6mm) sunk flush with the ground outside.

The surface within the circle to be ¾" (2cm) lower than the outside level and surfaced with concrete or similar material.

Sector lines to be white and marked with cloth tape held in place with metal pins or chalk.

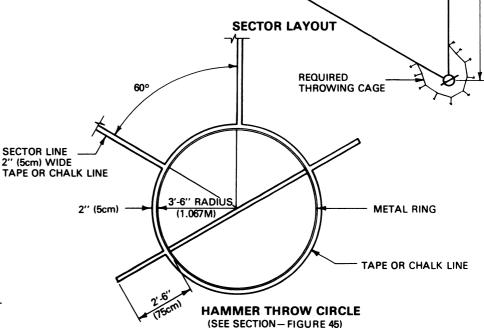

HAMMER THROW

FIGURE 46

RADIUS

z Z

(76.20M)

è

250,

2 - 93

TM 5-803-10 / NAVFAC P-457 / AFR 88-33

SECTOR FLAG

60°

DISCUS THROW

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 25,500 square feet minimum.

SIZE AND DIMENSION

Discus throwing circle is 8'-2½" (2.05M) in diameter. Throwing sector is 60° angle and 220' (67.06M) minimum radius.

ORIENTATION

Preferred orientation is for the throwing direction to be toward the northeast quadrant.

SURFACE AND DRAINAGE


Surface of inner circle is to be concrete or similar material.

Throwing sector is to be turf at the same level as the top of the metal ring.


SPECIAL CONSIDERATIONS

For safety all throws must be made from within an approved enclosure or cage.


Sector flags are required to mark end of landing zone at distance required by the competition.



DISCUS THROW CIRCLE

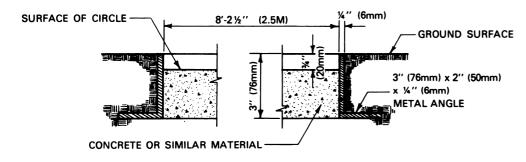

SECTION - DISCUS THROW CIRCLE

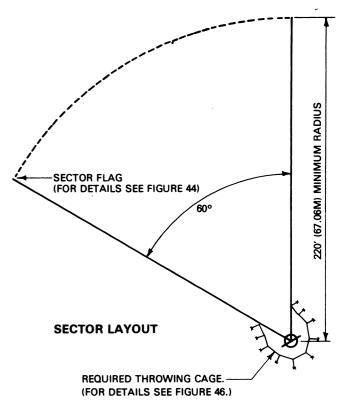

Throwing circles to be formed of continuous band iron or steel angle 3" (76mm) x 2" (50mm) x %" (6mm) sunk flush with the ground outside.

The surface within the circle to be %" (2cm) lower than the outside level and surfaced with concrete or similar material.

Sector lines to be white and marked with cloth tape held in place with metal pins or chalk.

DISCUS THROW

JAVELIN THROW

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 24,000 square feet minimum.

SIZE AND DIMENSION

Runway length is minimum 120′-0″ (36.5M). Runway width is 13′-1 $\frac{1}{2}$ ″ (4.0M). Throwing sector is 30° angle and 300′-3″ (91.5M) minimum radius.

ORIENTATION

Preferred orientation is for the throwing direction to be toward the northeast quadrant.

SURFACE AND DRAINAGE

Runway may be turf or specialized bituminous surfacing with a maximum slope of one percent (1:100) laterally and one tenth of one percent (1:1000) in the running direction.


Throwing sector is to be turf at the same level as the runway behind the throwing arc.

SPECIAL CONSIDERATIONS

Foul board is to be provided at end of runway.

Sector flags are required to mark end of landing zone at distance required by the competition.




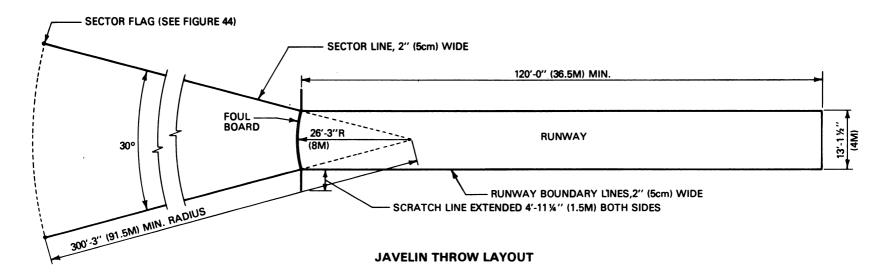

Sector lines to be white, 2" (5cm) wide and marked with cloth tape held in place with metal pins or chalk.

Runway may be either turf or bituminous material.

For runway surfacing details see figure 41.



DETAIL - JAVELIN THROW FOUL BOARD

JAVELIN THROW

LONG JUMP AND TRIPLE JUMP

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 1500 square feet minimum.

SIZE AND DIMENSION

Runway length is 130'-0" (39.62M) minimum. Runway width is 4'-0" (1.22M) minimum. Landing pit width is 9'-0" (2.75M) minimum. Landing pit length is 32'-0" (10M) minimum.

ORIENTATION

Preferred orientation is for the running direction to be toward the north or northeast.

SURFACE AND DRAINAGE

Runway preferably is to be bituminous material with a hot plant cushion course mix and optional protective colorcoating.


Maximum slope is to be one percent (1:100) laterally and one tenth of one percent (1:1000) in the running direction.

Landing pit is to be sand at the same elevation as the take off board.

SPECIAL CONSIDERATIONS

Take off board is to be of wood and must be fixed immovable in the runway.




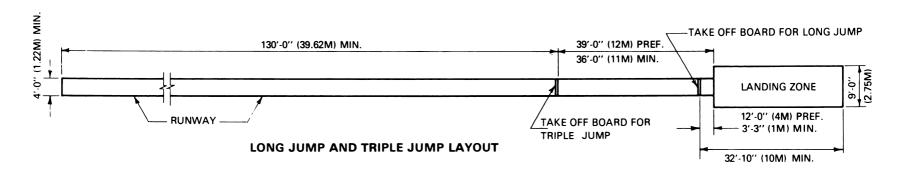


The edge of the takeoff board nearest the landing pit shall be the scratch, or foul line.

The construction and material of the runway shall be extended beyond the takeoff board to the nearer edge of the landing pit.

For runway surfacing details see figure 41.

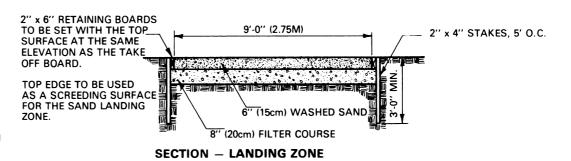



SECTION — TAKE OFF BOARD FOR LONG JUMP AND TRIPLE JUMP

LONG JUMP AND TRIPLE JUMP

POLE VAULT

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 1500 square feet minimum.

SIZE AND DIMENSION

Runway length is 125'-0" (38.10M) minimum. Runway width is 4'-0" (1.22M) minimum. Vault pit width is 16'-0" (5M) minimum and depth is 12'-0" (3.66M) minimum to 16'-0" (5M) preferred. Height of material in jumping pit is 18" (0.46M) minimum to 36" (0.92M) preferred, with a connecting apron of the same material and decreasing height around the vaulting box.

ORIENTATION

Preferred orientation is for the running direction to be toward the north to east-northeast.

SURFACE AND DRAINAGE

Runway preferably is to be bituminous material with a hot plant cushion course mix and optional protective colorcoating.

Maximum slope is to be one percent (1:100) laterally and one tenth of one percent (1:1000) in the running direction.

SPECIAL CONSIDERATIONS

Pole vault box must be immovably fixed in the ground with its entire front edge flush with the front edge of the jumping pit.

Jumping pit is to be filled with a resilient sponge-like rubber or other synthetic material.




(190mm) (90mm) 7 3/8" . 3 ¾"


6" (150mm)

(1224 MM)

2" (5cm) THICK

RIGID MATERIAL



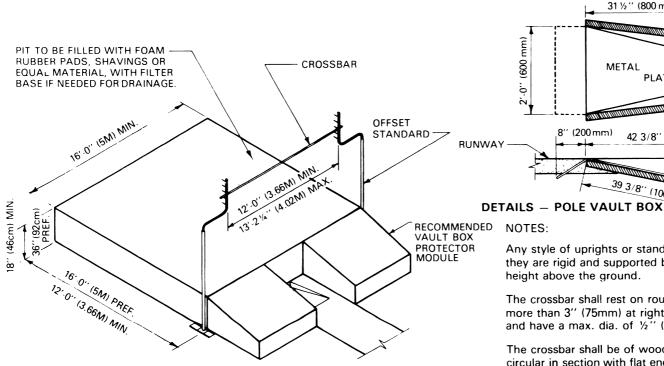

ISOMETRIC SHOWING JUMPING PIT, STANDARDS AND CROSSBAR





-0" (600 mm)

Any style of uprights or standards may be used, provided they are rigid and supported by a base not to exceed 4" in height above the ground.

39 3/8" (1000 mm)

31 ½" (800 mm)

PLATE

42 3/8" (1080mm)

1059

METAL

8" (200 mm)

The crossbar shall rest on round pins which project not more than 3" (75mm) at right angles from the uprights and have a max. dia. of ½" (12mm).

The crossbar shall be of wood or metal and triangular or circular in section with flat ends.

Each side of the triangular bar shall measure 1.181 in. (30mm) and the diameter of the circular bar shall be .984 in. (25mm) MIN., 1.181 in. (30mm) MAX. Length shall be 12-8" (3.8cm) MIN., 14'-10" (4.52M) MAX.

For runway surfacing details see figure 41.

POLE VAULT

HIGH JUMP

NAME OF SPORTS ORGANIZATION

National Collegiate Athletic Association, (NCAA), 1974.

RECOMMENDED AREA

Ground space is 4000 square feet minimum.

SIZE AND DIMENSION

High jump runway is 50' (15.24M) radius semi-circle. High jump pit width is 16' (5M) by 8' (2.5M) depth minimum. Height of material in jumping pit is 12" (0.30M) minimum. Take-off area is 10'-0" (3M) radius semi-circle with centerpoint directly under center of crossbar, and no point within this area may be higher than point of measurement.

ORIENTATION

Preferred orientation is for the direction of jumping to be toward the north to east-northeast.

SURFACE AND DRAINAGE


Runway preferably is to be constructed of bituminous material with an optional synthetic surface.

Surface should be level and unvarying within its arc of 180°.

SPECIAL CONSIDERATIONS

Jumping pit is to be filled with a resilient sponge-like rubber or other synthetic material.



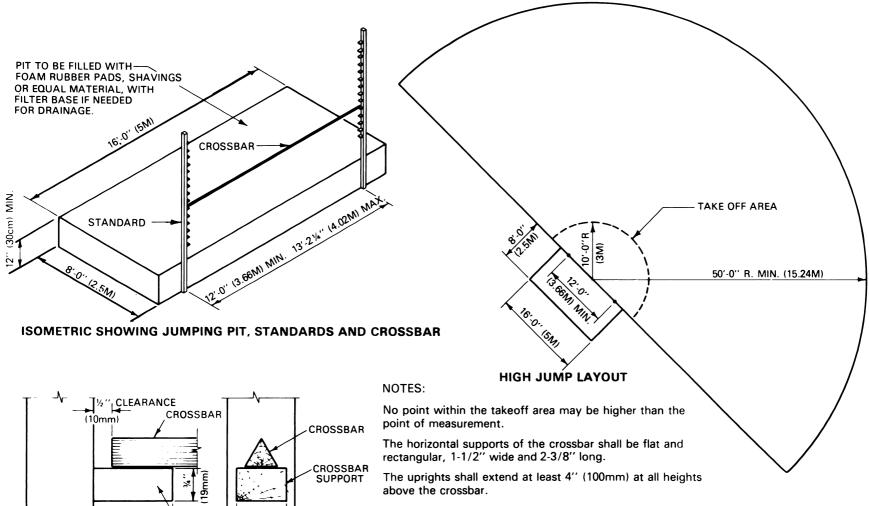

CROSSBAR SUPPORT DETAILS

1 ½ "

(38mm)

STANDARD

2 3/8"

(60mm)

SUPPORT

The crossbar shall be of wood or metal and triangular or circular in section with flat ends.

Each side of the triangular bar shall measure 1.181 inches (30mm) and the diameter of the circular bar shall be .984 .984 in. (25mm) MIN. or 1.181 in. (30mm)MAX.

For surfacing details see figure 41.

HIGH JUMP FIGURE 51
Digitized by GOGIE





COMBINATION BASKETBALL-VOLLEYBALL COURTS

NAME OF SPORTS ORGANIZATION

Basketball-National Collegiate Athletic Association, (NCAA), 1974. Volleyball-United States Volleyball Association, (USVA), 1974.

RECOMMENDED AREA

Ground space is 9,120 square feet for one basketball and two volleyball courts.

SIZE AND DIMENSION

Overall length is 114'-0". Overall width is 80'-0".

ORIENTATION

Preferred orientation is for the long axis of the court(s), which is (are) expected to have primary use, to be north-south.


SURFACE AND DRAINAGE

Surface is to be preferably bituminous material with optional protective colorcoating.

Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of 1" in 10'.

SPECIAL CONSIDERATIONS

Removable post with flush mounted deck plate must be used for the center volleyball net post to allow unobstructed use of the basketball court.

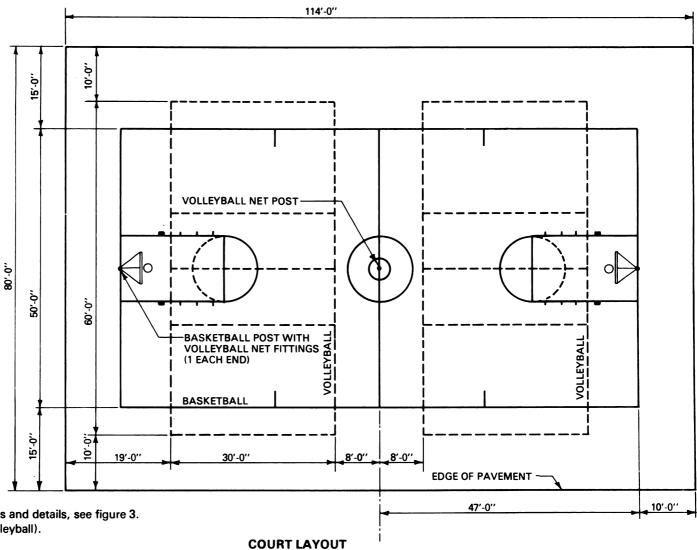

For individual court dimensions and details, see figure 3. (Basketball) and figure 21 (Volleyball).

For surfacing details see figure 70.

For removable volleyball net post details see figure 65.

ONE BASKETBALL AND TWO VOLLEYBALL COURTS



TENNIS, VOLLEYBALL, BASKETBALL, BADMINTON COURTS

NAME OF SPORTS ORGANIZATION

Basketball-National Collegiate Athletic Association, (NCAA), 1974. Volleyball-United States Volleyball Association, (USVA), 1974. Badminton-American Badminton Association (ABA), 1972-73. Tennis-United States Lawn Tennis Association, (USLTA), 1974.

RECOMMENDED AREA

Ground space is 24,720 square feet for four tennis courts with one basketball, one volleyball and one badminton court superimposed thereon.

SIZE AND DIMENSION

Overall length is 206'-0". Overall width is 120'-0".

ORIENTATION

Preferred orientation is for the long axis of all courts to be north-south.

SURFACE AND DRAINAGE

Surface is to be bituminous material with optional protective colorcoating.


Drainage is to be end to end, side to side or corner to corner diagonally at a minimum slope of 1" in 10".

SPECIAL CONSIDERATIONS

Special provisions must be made to allow the various net posts to be erected for different court games.

Fencing should be provided 10'-0" high on all sides.



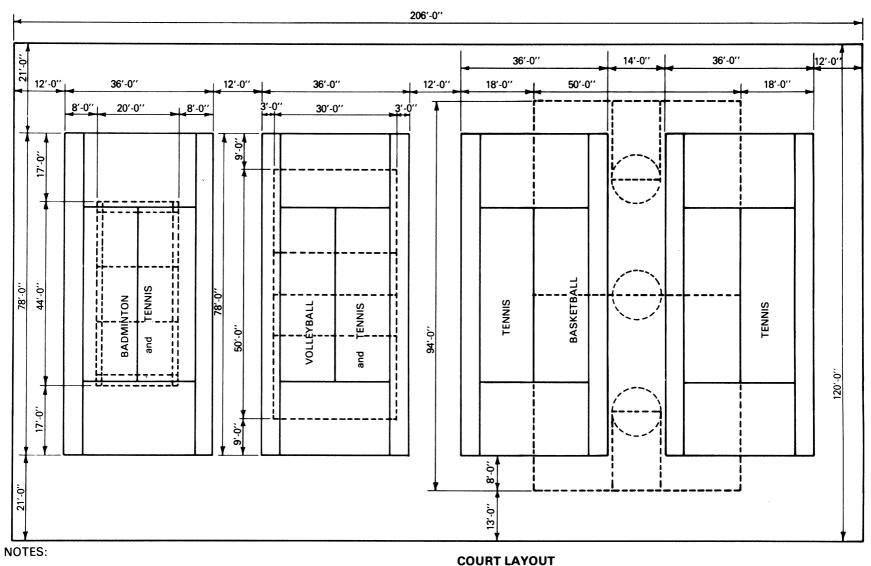

For individual court dimensions and details see figure 1 (Badminton), figure 3 (Basketball), figure 19 (Tennis) and figure 21 (Volleyball); for fence details see figure 63.

For surfacing details see figure 70.

FOUR TENNIS COURTS WITH ONE BASKETBALL ONE BADMINTON AND ONE VOLLEYBALL COURT

Digitized by Gogle

MULTIPLE RECREATION COURT

NAME OF SPORTS ORGANIZATION

Basketball-National Collegiate Athletic Association, (NCAA), 1974. Volleyball-United States Volleyball Association, (USVA), 1974. Tennis-United States Lawn Tennis Association, (USLTA), 1974. Shuffleboard-National Shuffleboard Association, (NSA), 1974.

RECOMMENDED AREA

Ground space is 9,840 square feet.

SIZE AND DIMENSION

Overall length is 120'-0". Overall width is 82'-0".

ORIENTATION

Preferred orientation is for the long axis of the court(s), which is(are) expected to have primary use, to be north-south.

SURFACE AND DRAINAGE


Surface is to be bituminous material with optional protective colorcoating or Portland Cement concrete (PCC), except that shuffleboard courts must be concrete.

Preferred drainage is from end to end at a slope of 1" in 10' with the 12'-0" areas on each end to be level for the shuffleboard courts.

SPECIAL CONSIDERATIONS

Removable posts with flush mounted deck plates must be used for tennis and volleyball to allow unobstructed use of other courts.

Fencing should be provided 10'-0" high on all sides.

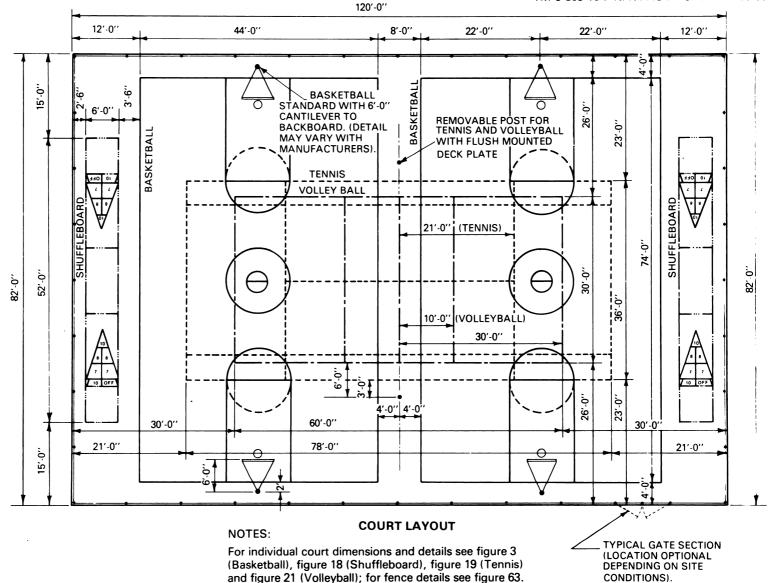


For removable net post details see figure 65.

details see figure 70.

For drainage details see figure 55; for surfacing

MULTIPLE RECREATION COURT


Digitized by GOGE

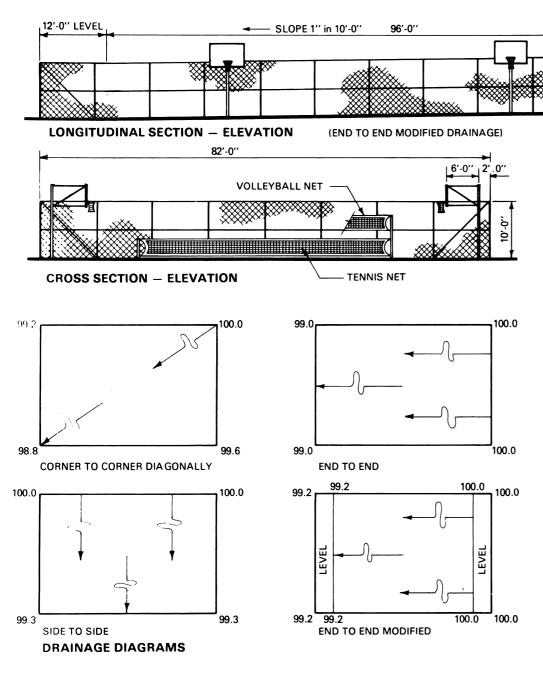

NOTE (see figure 54):

Color key for painted court lines
Basketball Light Green
Tennis White
Volleyball Yellow
Shuffleboard Black

.12'-0" LEVEL

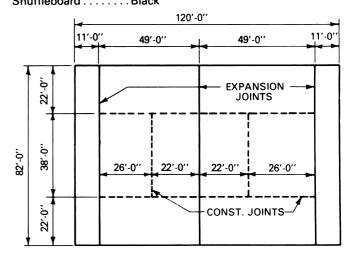

JOINT LAYOUT FOR CONCRETE CONSTRUCTION

NOTES:

For layout details see figure 54.

The area in which shuffleboard courts are located must be paved as an overrun for the tennis court whether or not the shuffleboard courts are installed; end to end modified drainage scheme must be used if they are installed.

MULTIPLE RECREATION COURT DETAILS

COMBINATION BASEBALL, FOOTBALL, SOFTBALL FIELDS

NAME OF SPORTS ORGANIZATION

Baseball-The Official Playing Rules Committee, Official Baseball Rules, 1974. Softball-Amateur Softball Association of America (ASA). Touch and Flag Football-National Touch and Flag Football Rules-The Athletic Institute. Football, 11 man-National Collegiate Athletic Association (NCAA).

RECOMMENDED AREA

Varies with number of fields and configuration.

SIZE AND DIMENSION

Varies with number of fields and configuration.

ORIENTATION

Preferred orientation varies when combinations are used. Selection for priority should be based on anticipated use, time of play, and local site conditions.

SURFACE AND DRAINAGE


Surface is to be turf.

Drainage is to be provided following guidelines for individual sports.

SPECIAL CONSIDERATIONS

Safety aspects of each sport or field must not be compromised when multiuse concepts are employed.



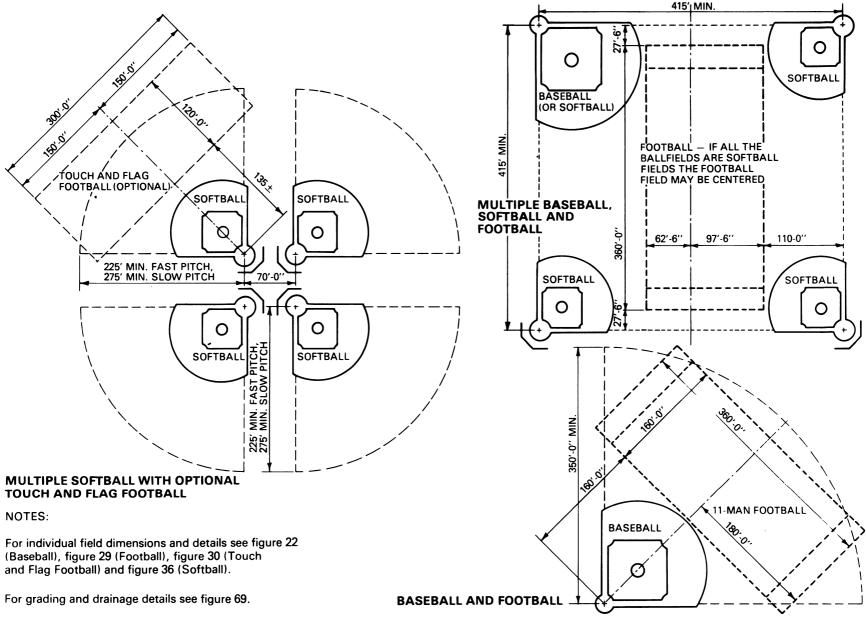

For surfacing details see figure 70.

FIGURE 56

COMBINATION BALLFIELDS

ATHLETIC BALLFIELDS WITHIN ¼ MILE RUNNING TRACK

NAME OF SPORTS ORGANIZATION

¼ Mile Running Track-National Collegiate Athletic Association (NCAA). Football-National Collegiate Athletic Association (NCAA). Soccer-National Collegiate Athletic Association (NCAA).

RECOMMENDED AREA

Ground space is 4.0 acres.

SIZE AND DIMENSION

Overall length is 600.02'. Overall width is 276.00'.

ORIENTATION

The long axis of the complex should be so oriented that it runs north-south to northwest-southeast.

SURFACE AND DRAINAGE

Track surface is to be preferably bituminous with optional synthetic surface.


Ballfields are to be turf.

Ballfields should be crowned for drainage.

Track should pitch inward at one percent(1:100) maximum slope.

SPECIAL CONSIDERATIONS

A system of underdrains and/or storm water sewers must be provided to accommodate surface runoff.

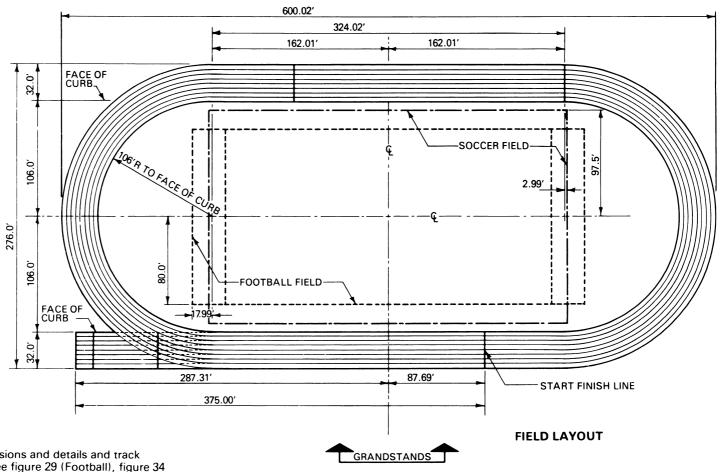

For individual field dimensions and details and track dimensions and details see figure 29 (Football), figure 34 (Soccer) and figures 40, 41, 42, 43 and 44 (¼ Mile Running Track Layout).

For grading and drainage details see figure 69.

For surfacing details see figure 70.

BALLFIELDS WITHIN RUNNING TRACK

SECTION 3 RECREATION SHOOTING RANGES

ARCHERY, TARGET RANGE

NAME OF SPORTS ORGANIZATION

National Archery Association, (NAA), 1974.

RECOMMENDED AREA

Ground space is 28,600 square feet minimum (.65 acre).

SIZE AND DIMENSION

Shooting range is 300'-0" long by 10'-0" wide minimum, 15'-0" desirable, between targets. Roped clear space on each side of range is 30'-0" minimum. Roped clear space behind targets should be at least 90'-0" (45'-0" with bunker).

ORIENTATION

Range should be located so that the archer is facing north $\pm 45^{\circ}$.

SURFACE AND DRAINAGE

Surface is to be turf and free from obstructions or hard objects.

Drainage is to be preferably from side to side to maintain a constant, relatively level, elevation between the target and the archer at the various shooting distances.

SPECIAL CONSIDERATIONS

Target is to be provided as prescribed for official competition.

Conspicuous signs should be provided to the side and rear to warn people of the range.



Space behind and to either side of the range to be clear and free from hard objects.


Background behind targets to be preferably dense trees, natural or manmade hills or protective shields.

Range to be sited on fairly level land, free from obstructions, preferably sheltered from high winds and oriented to north \pm 45°.


Standard rounds for adults, 30 - 100 yards.

Standard rounds for juniors, 20 - 50 yards.

Target may be mounted on a round butt of spirally sewn straw or rush supported by a portable soft wood target stand. Colors may be painted on an oilcloth cover.

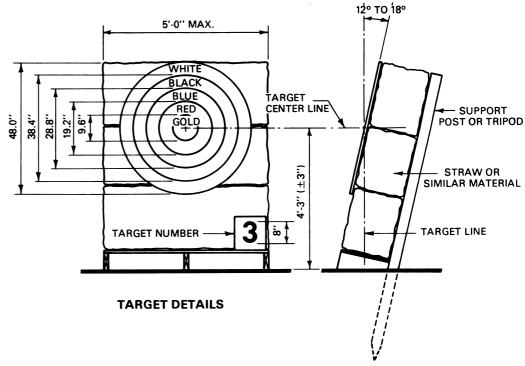

ROPED CLEAR SPACE BEHIND TARGETS

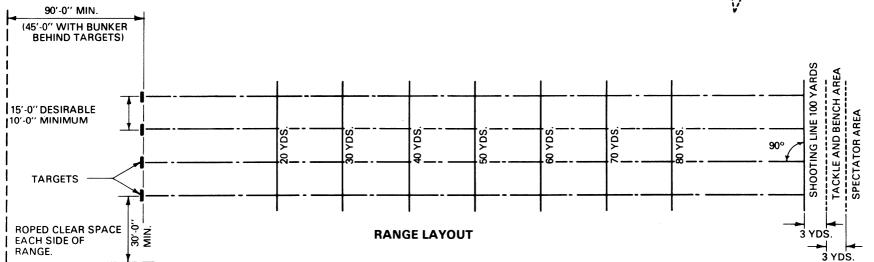

ARCHERY, TARGET RANGE

INTERNATIONAL SHOOTING UNION AUTOMATIC TRAP

NAME OF SPORTS ORGANIZATION

National Rifle Association, (NRA).

RECOMMENDED AREA

Allow 15 acres for a single field.

SIZE AND DIMENSION

Walks and structure occupy an overall area approximately 60' deep by 45' wide.

Shooting stations may be 36" to 40" square.

ORIENTATION

Preferred orientation is for the center line through shooting station #3 to run northeast-southwest with the shooter facing northeast.

SURFACE AND DRAINAGE


Shooting stations are to be Portland cement concrete (PCC). Walkways may or may not be paved. Shooting area and 75 to 82 yard radius minimum cleared area are to be turf. The 300 yard radius shotfall danger zone outside of the cleared area may be turf, water or left in natural condition, and the entire field should be located in a relatively flat area with an open background.

SPECIAL CONSIDERATIONS

If shooting is entirely over land there should be safety provisions for fencing, posting of warning signs and clearing away of concealing brush.

If shooting is over water, warnings posted on buoys or other signs are required and the trap house should be back far enough from the water's edge to permit recovery of unbroken targets. The trap house roof must be on the same level as the shooting stations.

Contact the National Rifle Association for information on trap house construction and trap machines.

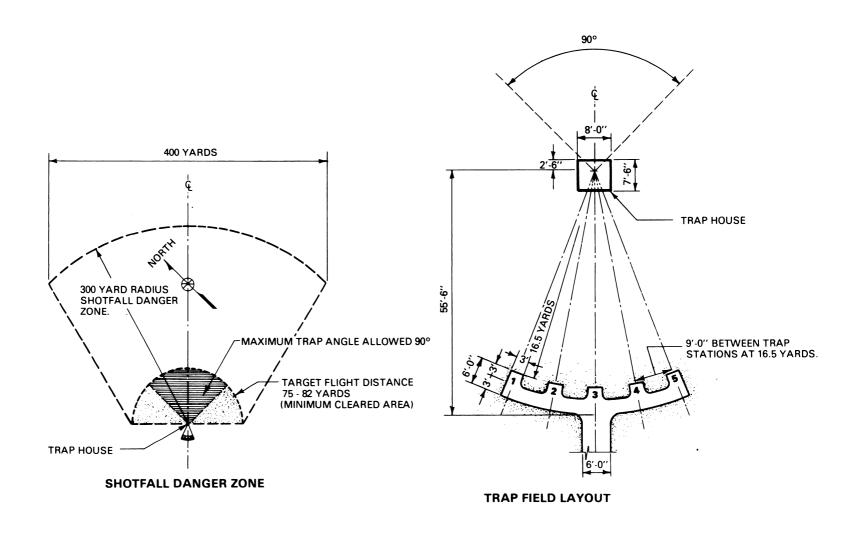

I.S.U. AUTOMATIC TRAP

TRAP FIELD

NAME OF SPORTS ORGANIZATION

Amateur Trapshooting Association, (ATA), 1974.

RECOMMENDED AREA

Allow 16 acres for a single field. Shotfall danger zones of adjacent fields partially overlap and require only 3 acres additional land.

SIZE AND DIMENSION

Walks and structures occupy an overall area approximately 100' deep by 65' wide. Minimum cleared area is a section with a radius of 100 yards (1.7 acres). Shotfall danger zone is a section with a radius of 300 yards (14.8 acres).

ORIENTATION

Preferred orientation is for the center line through shooting station #3 to run northeast-southwest with the shooter facing northeast.

SURFACE AND DRAINAGE


Shooting stations are to be Portland cement concrete (PCC). Walkways may or may not be paved. Shooting area and 100 yard radius minimum cleared area are to be turf. The 300 yard radius shotfall danger zone may be turf, water or left in natural condition, and the entire field should be located in a relatively flat area with an open background.

SPECIAL CONSIDERATIONS

If shooting is entirely over land there should be safety provisions for fencing, posting of warning signs and clearing away of concealing brush.

If shooting is over water, warnings posted on buoys or other signs are required, and the trap house should be back far enough from the water's edge to permit recovery of unbroken targets.

Contact the National Rifle Association for information on trap house construction and trap machines.

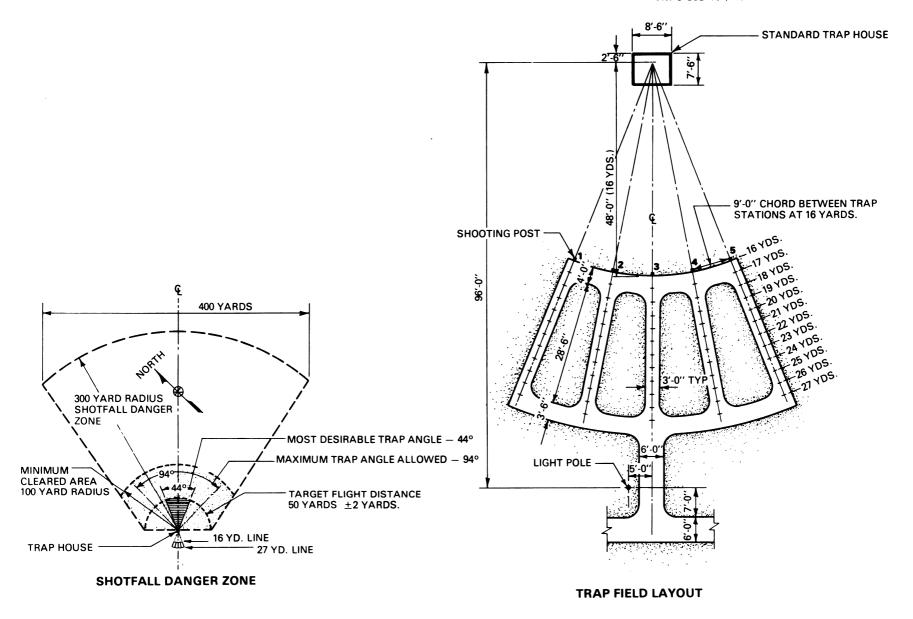

TRAP FIELD
FIGURE 61
Digitized by Google

COMBINATION SKEET AND TRAP FIELDS

NAME OF SPORTS ORGANIZATION

Skeet-National Skeet Shooting Association (NSSA). Trap-Amateur Trapshooting Association (ATA).

RECOMMENDED AREA

Allow 30 acres for a combination field.

SIZE AND DIMENSTION

All walks and structures occur within an area approximately 130' wide by 115' deep. Minimum cleared area is contained within two superimposed segments with 100 yard radii (4 acres). Shotfall danger zone is contained within two superimposed segments with 300 yard radii (36 acres).

ORIENTATION

Preferred orientation is for the center line from skeet station #4 through trap station #3 to skeet station #8 to run northeast-southwest with the shooter facing northeast.

SURFACE AND DRAINAGE

Shooting stations are to be Portland cement concrete (PCC). Walkways may or may not be paved. Shooting area and minimum cleared area are to be turf. Shotfall danger zone may be turf, water, or left in natural condition and the entire field should be located in a relatively flat area with an open background.


SPECIAL CONSIDERATION

If shooting is entirely over land there should be safety provisions for fencing, posting of warning signs and clearing away of concealing brush.

If shooting is over water, warnings posted on buoys or other signs are required, and the trap house should be back far enough from the water's edge to permit recovery of unbroken targets.

Contact the National Rifle Association for information on skeet and trap house construction and trap machines.



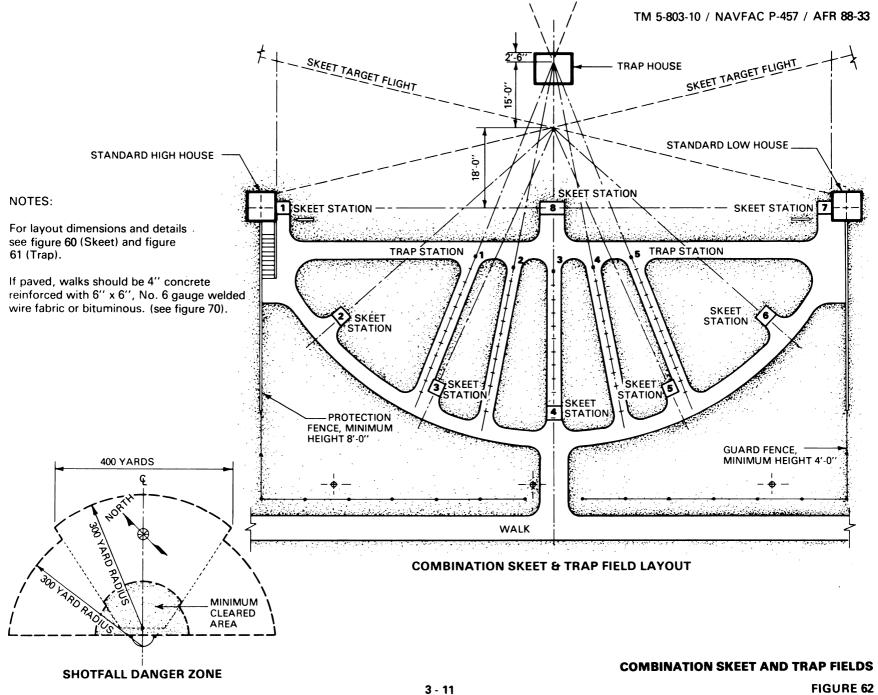

SECTION 4 CONSTRUCTION DETAILS

FENCE ENCLOSURES

Fence posts shall be a minimum of schedule 40 weight regardless of cross sectional configuration.

Fabric shall be chain link with galvanized coating per ASTM A392 or aluminized per ASTM A491, (optional polyvinyl chloride coated steel).

Reinforcing tension wire is to have a minimum tensil strength of 80,000 P.S.I.

Hog rings of .110" diameter aluminum wire shall be used to attach fabric to reinforcing tension wire 2'-0" O.C.

Tie wire of .144" diameter aluminum alloy shall be used to attach fabric to top rail and intermediate posts 14" O.C.


Tension bars of $1/4'' \times 3/4''$ or $3/16'' \times 3/4''$ galvanized steel woven through the fabric are to be fastened to terminal and gate posts with 11 gauge x 1'' wide galvanized steel bands 14" O.C.

Selvage top and bottom is to be knuckled.


All ferrous metal parts are to be hot dipped galvanized or aluminized after fabrication.

Gates are to have offset hinges and a latching device that allows access to a padlocking device from both sides.

Concrete footings shall be minimum 9" diameter. Concrete shall conform to ASTM C94, maximum 3/4" aggregate, minimum 3,000 P.S.I. compressive strength (f'c) at 28 days.

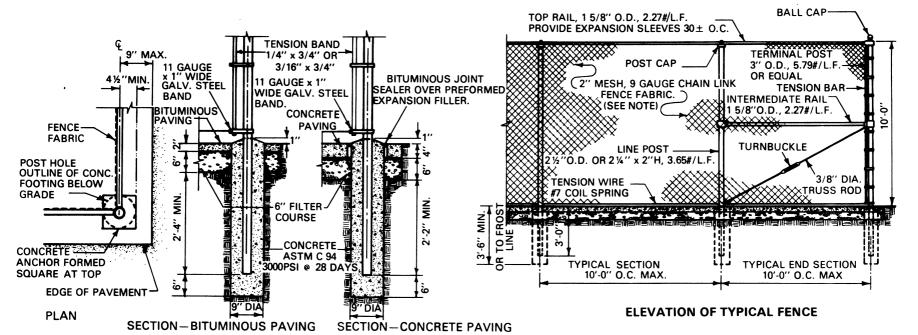

CORNER POST AND FOOTING DETAILS

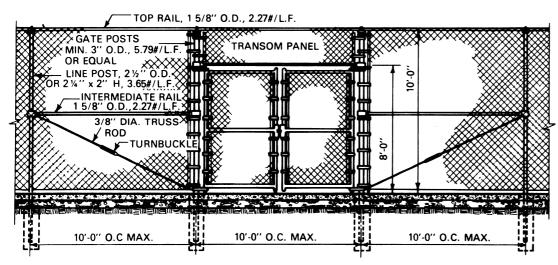

NOTES:

Layouts and details on this drawing are recommendations based on analysis of current construction techniques and manufacturers' equipment lines and should be utilized as a guideline in obtaining the appropriate product from local suppliers and manufacturers.

Double gate layout shown is for information as to type and designation.

In so far as possible, gate details shall be of the manufacturer's standard design. A single pedestrian gate may be used.

Different mesh and gauge sizes of chain link fabric are shown in notes on layout drawings for each sport.

ELEVATION OF DOUBLE GATE

FENCE ENCLOSURES

FIGURE 63

FIXED NET POSTS

POST PIPE SIZES

Badminton, Paddle Tennis, Platform Tennis and Tennis - minimum 2.469" I.D., 2.875" O.D.

Volleyball - minimum 3.068" I.D., 3.500" O.D.

FOOTINGS

Concrete - 1'-4" minimum diameter for end posts, 8" minimum diameter for tennis anchor footing, and 4'-0" or to frost line depth. Top of concrete to slope away from post. Concrete minimum 2500#.


PIPE AND FITTINGS

All ferrous metal parts are to be hot dip galvanized or aluminized after fabrication.

PAINTING

If posts are to be painted, they should be etched with acid, primed and painted with a good exterior enamel.



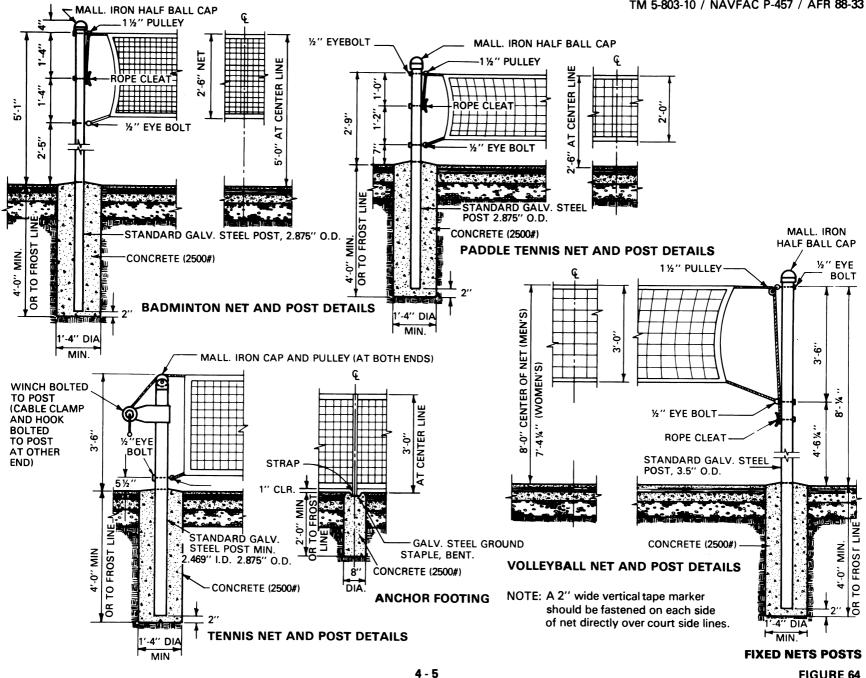

REMOVABLE NET POSTS

POST PIPE SIZES

Badminton, Paddle Tennis, Platform Tennis and Tennis - minimum 2.469" I.D., 2.875" O.D. Volleyball - minimum 3.068" I.D., 3.500" O.D.

SLEEVES

May be a commercially available product or fabricated per details on facing sheet.

FOOTINGS

Concrete - 1'-4" minimum diameter, and 4'-0" or to frost line depth. Top of concrete to slope away from post. Concrete minimum 2500#.

PIPE AND FITTINGS


All ferrous metal parts are to be hot dip galvanized or aluminized after fabrication.

PAINTING

If posts are to be painted, they should be etched with acid, primed and painted with a good exterior enamel.



Digitized by

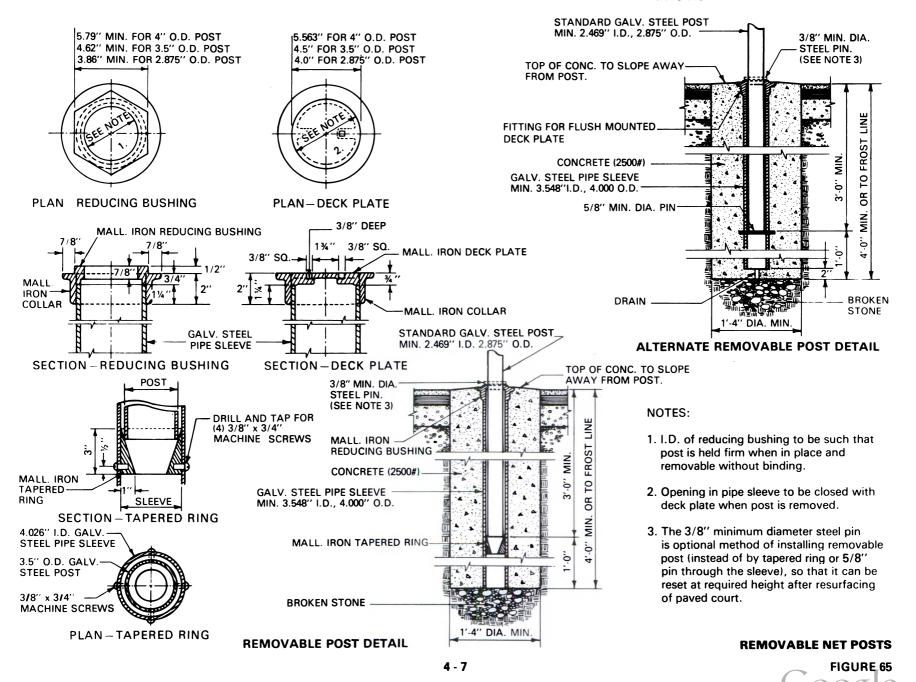

FOOTBALL GOAL POSTS AND BASKETBALL STANDARDS

FOOTBALL GOAL POSTS

Posts and crossbar are preferably made of 3.548" I.D., 4.000" O.D., 9.10#/L.F. galvanized steel pipe. For removable posts of this size, use 5.047" I.D., 5.563" O.D. minimum galvanized steel pipe sleeves.

All pipe joints should be welded.

All pipe should be etched with acid before painting and then primed before applying a good exterior enamel.

Optional goal post may be used in the form of a single metal post set behind the end zone in a 30" diameter by 4'-0" minimum concrete base with a cantilevered horizontal crossbar and two uprights of the same height and spacing as for dual posts.

BASKETBALL STANDARDS


Backboard support shall have a minimum overhang of 4'-0" for NCAA with a minimum post diameter of 4½"O.D.

Regulation AAU, 5'-5" (1.65M) overhang and optional NCAA 4'-0" - 6'-0" overhang also require a minimum post diameter of 4½"O.D.

Footing is to be concrete with a minimum 2'-0" diameter and 4'-0" depth.

Method of bracing and backboard support varies with manufacturer.



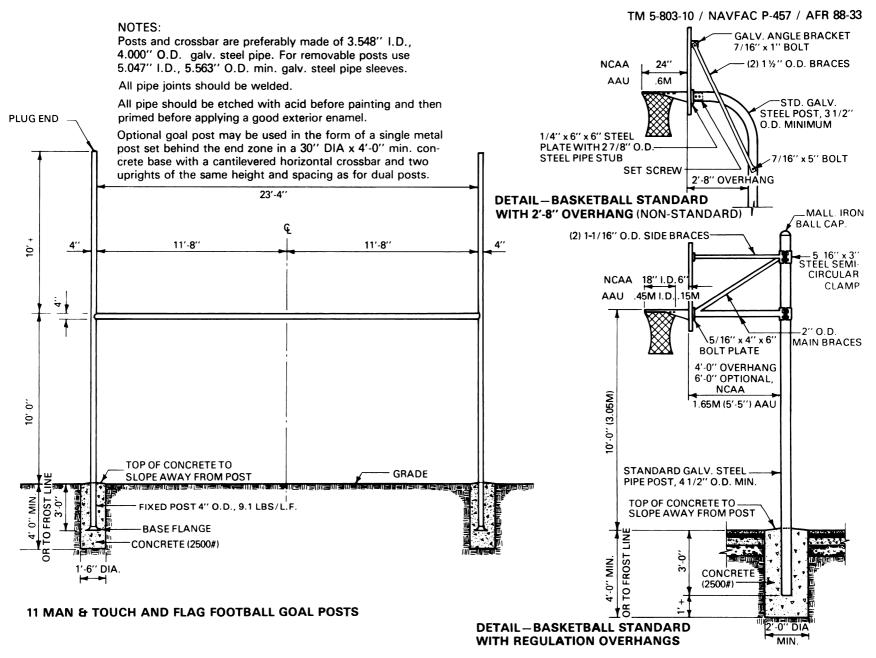

GOAL POSTS AND STANDARDS

FIGURE 66

Coogle

ONE WALL HANDBALL WALL DETAILS

SIZE AND DIMENSION

Wall height - 16'-0" to top of concrete, 4'-0" chain link fence - top of wall. Width - 24'-0" for single court (may be continuous with construction joint between courts in battery).

DESIGN CRITERIA

Design wind pressure for wall - 100 MPH.

Minimum soil bearing pressure required 2000 P.S.F.


Design concrete strength (f'c) at 28 days = 3000 P.S.I. (normal weight), maximum 3/4" aggregate, maximum w/c ratio - 0.50, 6% air entrainment.

Reinforcing steel - ASTM A615 Grade 60.

Weight of soil is assumed to be 100 pounds per cubic foot.

Water level is assumed to be below footings.

Vertical playing surfaces are to be plumb and true to within 1/8" in any 10'-0" dimension and to within 1/2" overall.

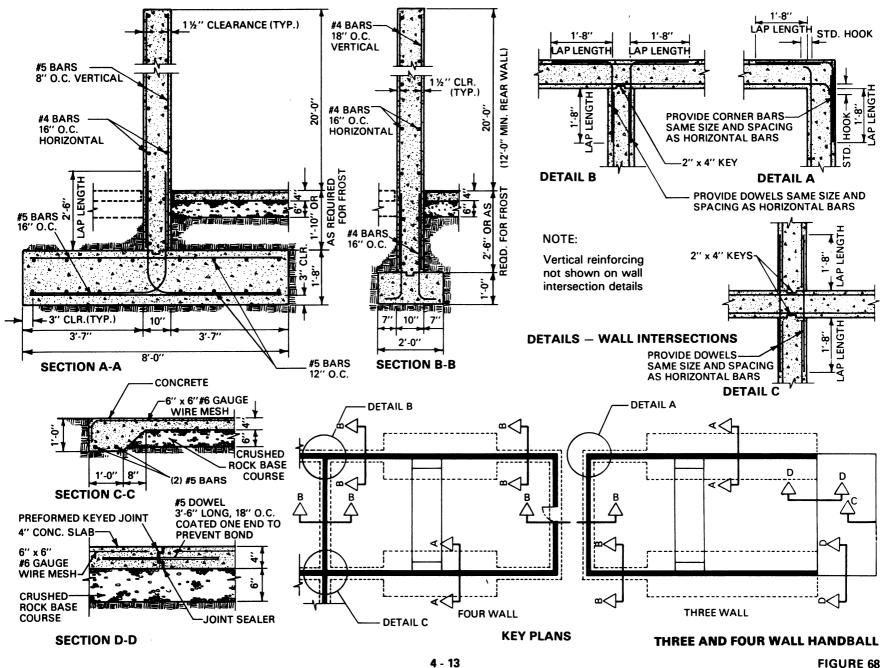

TYPICAL GRADING AND DRAINAGE DETAILS

COURT SURFACES

Paved playing surfaces should be in one plane and pitched from side to side, end to end, or corner to corner diagonally, instead of in two planes pitched to or from the net. Minimum slope should be 1" in 10'-0". Subgrade should slope in the same direction as the surface. Perimeter drains may be provided for paved areas. Underdrains are not recommended beneath paved areas.

PLAYING FIELDS

Preferred grading for rectangular field is a longitudinal crown with 1% slope from center to each side.


Grading may be from side to side or corner to corner diagonally if conditions do not permit the preferred grading.

Subsoil drainage is to slope in the same direction as the surface. Subdrains and filter course are to be used only when subsoil conditions require. Where subsoil drainage is necessary, the spacing of subdrains is dependent on local soil conditions and rainfall.

Subdrains are to have a minimum gradient of 0.15 percent.

Baseball and softball fields should be graded so that the bases are level.



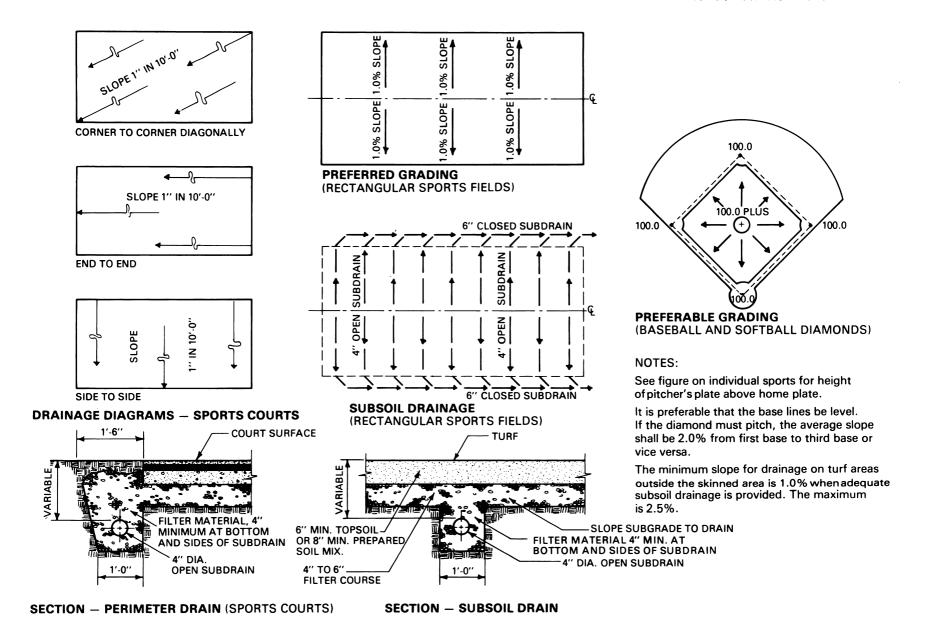

TYPICAL GRADING AND DRAINAGE DETAILS

FIGURE 69

TYPICAL PLAYING SURFACES

CONCRETE

Minimum compressive strength - 2500#.

Reinforcing - 6" x 6" #6 gauge welded wire fabric.

Minimum thickness 4".

Expansion joints are to be provided as required and doweled 2'-0" O.C. with 3/4" diameter x 2'-0" long dowel coated on one end to prevent bonding. Joint is to be filled with a 3/4" foam or preformed bituminous filler and sealed with polysulfide joint sealant.

Sand filter course - minimum 6" deep required.

BITUMINOUS MATERIAL

Base - 4" minimum stabilized aggregate base course over minimum 6" filter course.

Surface - minimum 2- ½" in two lifts: 1-½" leveling course of bituminous concrete and 1" surface course of bituminous concrete.

Sealcoat - on smooth asphalt surface apply protective colorcoating at the manufacturer's recommended rate.

SAND-CLAY

Filter course, 4" to 6", may be omitted if local soil conditions are suitable.

Base course - minimum 3" of 1- $\frac{1}{2}$ " crushed stone choked with $\frac{1}{4}$ " to $\frac{1}{2}$ " of crushed fines.

Surface course - minimum 4'' in two lifts: 3'' clay screened through 1'' mesh with a 1'' surface lift of 1/3 sharp sand and 2/3 clay-silt screened through 4'' mesh.


NATURAL TURF


Subgrade to pitch in the same direction as the surface and slope to underdrains.

Filter course, $4^{\prime\prime}$ to $6^{\prime\prime}$, is to be used only when subsoil conditions require.

Topsoil 6" minimum, or prepared soil mix 8" minimum.



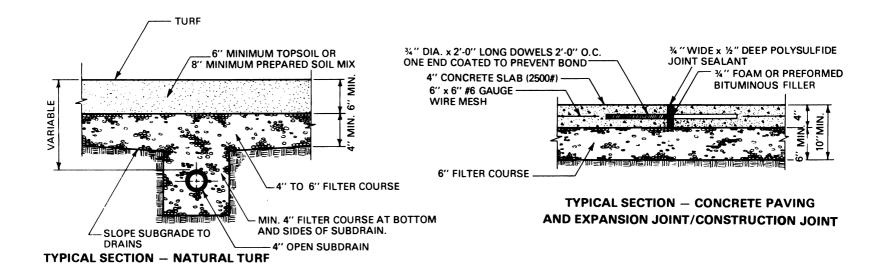

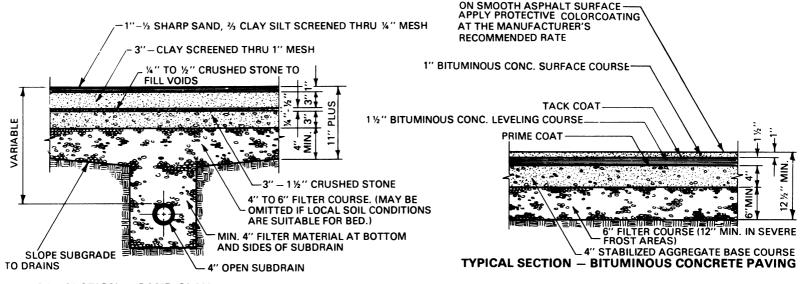

TYPICAL SECTION - SAND CLAY

TYPICAL PLAYING SURFACES

Digitized by Google

BACKSTOPS

SIZE AND DIMENSION

Height and width of softball backstops are to be determined by sport and local condition requirements.

Consult backstop framing diagrams for layout of softball backstops.

PIPE SIZES

Posts for backstop heights up to 16'-0", use 3" O.D. - 5.75#/L.F.

Posts for backstop heights 18' to 24', use 4" O.D. - 9.10#/L.F.

Top, intermediate, and bottom rails, 1-5/8" O.D., 2.27#/L.F. minimum.

FABRIC


Fabric shall be chain link with galvanized coating per ASTM A392 or aluminized per ASTM A491 (optional polyvinyl chloride coated steel).

All ferrous metal parts are to be hot dip galvanized after fabrication.

CONCRETE FOOTINGS

Footings shall be minimum 12" diameter. Concrete shall conform to ASTM C94, maximum 3/4" aggregate, minimum 3000 P.S.I. compressive strength (f'c) at 28 days.



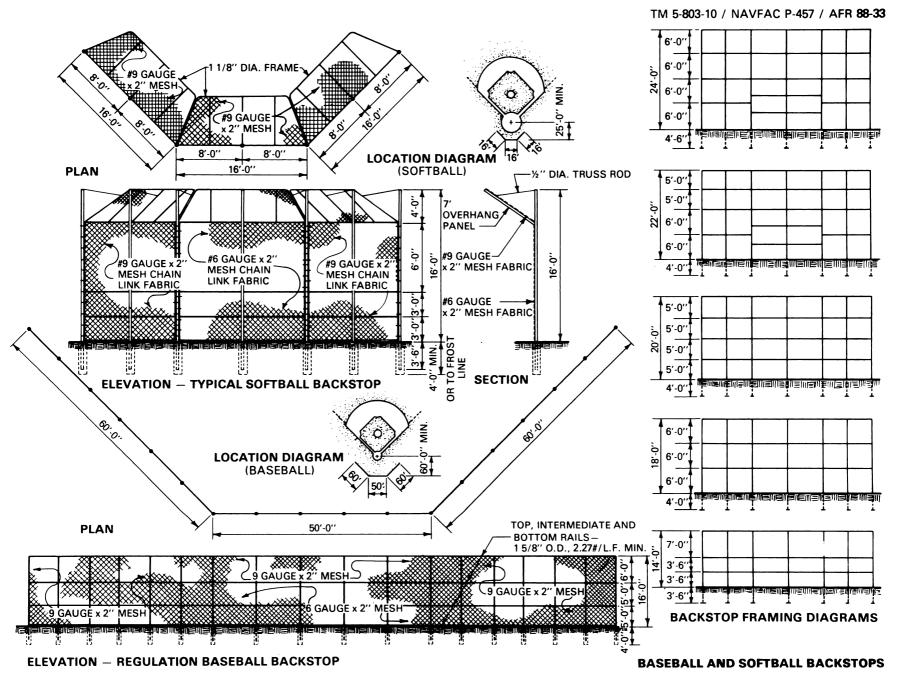

APPENDIX A - LIST OF SPORTS ORGANIZATIONS

Rules and Regulations of the following organizations were used in the development of layout diagrams and construction details in this manual:

Amateur Athletic Union of the United States 3400 West 86th Street Indianapolis, Indiana 46268 (Basketball)

Amateur Hockey Association of the United States 7901 Cedar Avenue South Bloomington, Minnesota 55420

Amateur Softball Association of America 2801 N.E. 50th Oklahoma City, Oklahoma 73111

Amateur Trapshooting Association of America 601 West National Road Vandalia, Ohio 45377

AMF Voit Corporation 3801 South Harbor Boulevard Santa Ana, California 92704 (Goal-Hi Basketball, Hopscotch)

American Badminton Association, Inc. 1330 Alexandria Drive San Diego, California 92107

American Lawn Bowls Association 10337 Cheryl Drive Sun City, Arizona 85351

American Platform Tennis Association c/o Fox Meadow Tennis Club Wayside Lane Scarsdale, New York 10583

American Roque League, Inc. 4205 Briar Creek Lane Dallas. Texas 75214 Babe Ruth Baseball, Inc. 1770 Brunswick Avenue P.O. Box 5000 Trenton, New Jersey 08638

Biddy Basketball Association, Inc. 4711 Bancroft Drive New Orleans, Louisiana 70122

Boy's Baseball, Inc. P.O. Box 225 Washington, Pennsylvania 15301

General Sportcraft Company, Ltd. 140 Woodbine Street Bergenfield, New Jersey 07621 (Boccie, Deck Tennis, Tether Ball)

International Shooting Union Wiesbaden - Klarenthal, West Germany (Rules may be obtained from: The National Rifle Association 1600 Rhode Island Avenue N. W. Washington, D.C. 20036)

Little League Baseball, Inc. P.O. Box 1127 Williamsport, Pennsylvania 17701

National Archery Association of the United States 1951 Geraldson Drive Lancaster, Pennsylvania 17601

National Collegiate Athletic Association P.O. Box 1906 Shawnee Mission, Kansas 66222 (Football, Soccer, Basketball, Lacrosse, Track and Field)

National Croquet Association, Inc. c/o American Roque League, Inc. 4205 Briar Creek Lane Dallas, Texas 75214 National Golf Foundation, Inc. 707 Merchandise Mart Chicago, Illinois 60654

National Horseshoe Pitchers' Association of America P.O. Box 3150 Eureka, California 95501

National Shuffleboard Association 10418 Northeast Second Avenue Miami, Florida 33138

National Skeet Shooting Association P.O. Box 28188 San Antonio, Texas 78228

National Touch and Flag Football Rules The Athletic Institute Merchandise Mart, Room 705 Chicago, Illinois 60654

National Association for Girls and Women in Sports (Sports Library for Girls and Women) c/o American Alliance for Health, Physical Education and Recreation 1201 Sixteenth Street, N.W. Washington, D.C. 20036 (Lacrosse, Soccer, Speedball)

The Official Playing Rules Committee Official Baseball Rules c/o The Sporting News 1212 North Lindbergh Boulevard St. Louis, Missouri 63132

Pop Warner Junior League Football International Headquarters Suite 606, 1315 Walnut Street Building Philadelphia, Pennsylvania 19107 United States Air Force c/o Director of Student Operations Squadron Officer School Maxwell Air Force Base, Alabama 36112 (Flicker Ball)

United States Field Hockey Association 107 School House Lane Philadelphia, Pennsylvania 19144

United States Handball Association 4101 Dempster Street Skokie. Illinois 60076

United States Lawn Tennis Association 51 East 42nd Street New York, New York 10017

United States Paddle Tennis Association 189 Seeler Street Brooklyn, New York 11218

United States Team Handball Federation 10 Nottingham Road Short Hills, New Jersey 07078

United States Volleyball Association 557 Fourth Street San Francisco, California 94107



APPENDIX B - METRIC CONVERSION TABLES

How To Use The Tables

To find the metric equivalent of 9 feet, 6¼ inches, simply follow down the column headed 9 at the top until level with the 6¼ inches (shown in both left and right hand columns), and the point where the two measurements meet will give the answer, 2.90 metres.

To find the English equivalent of 2.90 metres, first locate the figure in the table. Then by reading vertically, establish the 9 feet and, by reading horizontally either right or left, establish the 6¼ inches, to give the answer, 9 feet, 6¼ inches.

Metric and English Measurements

Metric measurements can be converted to English measurements by using the following equivalents:

1 millimetre (mm) = .03937 inch 1 centimetre (cm) = .3937 inch 1 metre (M) = 39.37 inches 1 kilometre = .62137 miles

English measurements can be converted to metric measurements by using the following equivalents:

1 inch = 2.54 centimetres (cm) 1 foot = 30.48 centimetres (cm) 1 yard = .914401 metres 1 mile = 1.609347 kilometres

Tables officially approved by the International Amateur Athletic Federation (Stockholm, 1970).

FEET & INCHES TO METRES (0—89ft. II inches in quarter inches)

	feet		-	-						satura constant	
	0	1	2	3	4	5	6	7	8		
inches											
0	0.00	0.30	0.61	0-91	1.22	1.52	1.83	2.13	2.44	3.44	0
0 <u>‡</u>	-00	-31	-61	·92	•22	∙53	-83	-14	-44		0⊁
얜	-01	∙32	∙62	-93	•23	∙53	-84	-14	· 4 5		01
01 01 01	-02	∙32	-63	.93	·24	-54	-85	·15	· 4 6		01 01
1	0.02	0.33	0.63	0.94	1.24	1.55	1.85	2.16	2.46	X4.43	1
14	∙03	•33	-64	.94	∙25	∙55	∙86	.16	· 4 7	Sec. 4. 18	1#
14 14 14	-04	-34	-65	.95	•26	·56	∙87	-17	· 47		14
12	-04	-35	·65	·96	·26	·57	·87	-18	·48	16.64	14
2	0.05	0.35	0.66	0.96	1.27 ·27	1.57	1.88	2 18	2.49	900	2
24	-06	-36	-66	· 97	•27	∙58	-88	.19	.49		24
21	-06	.37	-67	-98	∙28	-59	-89	·20	-50		21
24 24 24 24	-07	-37	-68	·98	•29	-59	·90	·20	-51		21 21 21 21
3	0-07	0.38	0.68	0.99	1.29	1.60	1.90	2.21	2.51	5 A T &	3
3 1 31/2	-08	-39	-69	1.00	.30	-60	.91	.21	•52		31 31 32
31/2	-09	-39	·70	-00	.31	.61	.92	.22	-53		3#
3#	-09	-40	·70	-01	-31	.62	.92	.23	-53	(A) 10 1 (10) (10)	34
4	0.10	0.40	0.71	1.01	1.32	1.62	1.93	2.23	2.54		4
41	-11	-41	·72	-02	.33	-63	.93	·24	·54		44
4 <u>1</u> 4 <u>1</u>	-11	-42	·72	-03	-33	-64	.94	∙25	-55		44
44	· 1 2	-42	-73	-03	·34	·6 4	.95	∙25	∙56		44
5	0.13	0.43	0.73	1.04	1.34	1.65	1.95	2.26	2.56	35.3	5 5 5 5
Ї	.13	-44	·74	-05	∙35	-66	∙96	-27	∙57	5 A 1	5∔
5 1 51	-14	-44	.75	-05	∙36	-66	·97	∙27	∙58	San B	5 <u>ĩ</u>
5 ‡	-14	∙45	∙75	-06	∙36	∙67	· 9 7	∙28	∙58		5
6	0.15	0.46	0.76	1.06	1.37	1.67	1.98	2.28	2.59		6
61	-16	·46	·77	-07	∙38	-68	.99	∙29	-60		61
6]	·16	· 4 7	·77	-08	-38	-69	.99	-30	∙60		6 <u>∔</u>
61 61 61	∙17	· 4 7	∙78	-08	-39	∙69	2.00	-30	-61	.91	61 61 61
7	0.18	0.48	0.79	1.09	1.40	1.70	2.00	2.31	2.61	10 mm	7
and the second			16 V.	100	(0.00)				-452		7≵
71	.19	.49	-80	·10	-41	-71	.02	·32	•63	.93	71
7 <u>1</u> 7 1 7 4	∙20	∙50	∙80	-11	-41	·72	∙02	.33	∙63	·9 4	74 74 74 74
8	0.20	0.51	0.81	1.12	1.42	1.73	2.03	2.33	2.64	2.94	8
81	-21	-51	∙82	-12	·43	·73	-04	·34	-65	-95	8 <u>‡</u>
8 <u>‡</u>	·21	∙52	∙82	-13	·43	·7 4	-04	∙35	∙65	·96	8 1
8 1	-22	∙53	-83	-13	-44	·7 4	∙05	∙35	∙66	·96	8
9	-023	0.53	0.84	1-14	1.45	1.75	2.06	2.36	2.67	2.97	9
	.23	-54	-84	· i 5	-45	.76	-06	-37	·67	-98	
9 1 9 1	-24	-54	·85	.15	·46	·76	·07	·37	-68	·98	9 <u>‡</u>
. 2		- •									- 3



^{*} Reprinted by permission from "Metric Conversion Tables (Standard Edition)". Copyright ©1969 by ARENA PUBLICATIONS LTD., 325 Streatham High Road, London, S.W. 16 England. Compiled by Bob Sparks, B.Sc. (Statistics) and Charles Elliott.

FEET	&	INCHES	TO	METRES
0-89ft.	11	4 inches is	aus	urter inches\

			(0-03)		IIICIIOS	ııı qua	u cer ii	icii co)			
	feet 0	ı	2	3	4	5	6	7	8	9	
inches											
0	0.00	0.30	0.61	0-91	1.22	1.52	1.83	2.13	2-44	2.74	0
Ο¥	-00	-31	-61	•92	.22	∙53	∙83	-14	-44	·75	ο#
0 	-01	-32	-62	.93	•23	·53	-84	-14	-45	·75	01
01 01	-02	∙32	∙63	∙93	·24	·5 4	∙85	∙15	-46	·76	01 01 01
1	0.02	0.33	0.63	0.94	1.24	1.55	1.85	2.16	2.46	2.77	
i₊	-03	.33	-64	.94	∙25	•55	∙86	-16	-47	•77	11
i 🖟	-04	-34	·65	.95	∙26	·56	∙87	·17	-47	∙78	ΙŢ
14 14 14	-04	∙35	· 6 5	∙96	∙26	∙57	· 87	-18	· 4 8	·79	14
2	0.05	0.35	0.66	0.96	1.27	1.57	1.88	2.18	2.49	2.79	2
	-06	-36	•66	· 9 7	•27	-58	-88	-19	-49	-80	21
2₹	-06	-37	· 6 7	·98	·28	-59	-89	.20	-50	-80	24 24 24
2± 2± 2± 2± 2±	-07	·37	-68	·98	·29	-59	·90	∙20	·51	-81	
3	0-07	0-38	0-68	0.99	1.29	1.60	1.90	2.21	2.51	2.82	3
34 31/2	-08	-39	-69	1.00	-30	-60	.91	·21 ·22	•52	∙82	3 <u>1</u> 3 <u>1</u>
3 <u>₹</u>	-09	-39	·70	-00	-31	-61	.92	.22	·53	-83	31
3 1	-09	-40	-70	-01	-31	.62	·92	∙23	-53	-84	34
4	0-10	0.40	0.71	1.01	1.32	1.62	1.93	2.23	2.54	2.84	4
44	·ii	·4i	·72	.02	-33	-63	٠93	·24	·54	∙85	44 44
4	-11	-42	·72 ·73	-03	-33	-64	.94	.25	.55	∙86	44
44 44 44	·12	-42	.73	-03	·3 4	-64	∙95	∙25	∙56	-86	44
	0.13	0.43	0.73	1.04	1.34	1.65	1-95	2.26	2.56	2.87	5
27	.13	-44	.74	-05	.35	.66	.96	-27	-57	- 87	51
51	-14	-44	·75	-05	-36	-66	·97	•27	-58	-88	51
5 5 5 5 2 5	-14	-45	·75	-06	∙36	∙67	· 9 7	∙28	∙58	-89	5 <u>1</u> 5 <u>1</u> 5 1
6	0.15	0.46	0.76	1.06	1.37	1.67	1.98	2.28	2.59	2.89	6
64	.16	·46	.77	.07	-38	-68	.99	-29	-60	-90	64 64 64
61	-16	-47	·77	-08	∙38	∙69	-99	-30	-60	.91	6 <u>1</u>
61 61	-17	· 4 7	.78	-08	•39	-69	2.00	∙30	٠6١	-91	64
7	0-18	0.48	0.79	1.09	1.40	1.70	2.00	2.31	2.61	2.92	7
71	-18	.49	.79	.10	-40	.71	-01	-32	·62	-93	7 <u>.</u>
71	.19	-49	-80	-10	.41	.71	.02	.32	-63	.93	7]
7± 7± 7± 7± 7±	·20	-50	-80	-11	-41	·72	∙02	-33	-63	·9 4	74 74 74 74
8	0-20	0.51	0.81	1.12	1.42	1.73	2.03	2.33	2.64	2.94	8
81	.21	·5i	·82	· i2	-43	.73	-04	-34	·65	95	81
81	·2i	-52	-82	·13	·43	.74	-04	-35	-65	.96	81
81	.22	∙53	-83	-13	-44	·7 4	∙05	∙35	•66	∙96	81 81 81
	022	0.53	0.04	1.14	1.45	1.75	2.06	2.26	2.47	2.07	9
9	·023 ·23	0·53 ·54	0·84 ·84	1·14 ·15	1·45 ·45	1·75 ·76	2·06 ·06	2·36 ·37	2·67 ·67	2·97 ·98	4
91	-24	-54	-85	.15	.46	.76	-07	.37	·68	.98	6 1
91 91 91 91	.25	·55	-86	·i6	-47	.77	.07	.38	-68	.99	94 94 94
10	0.25	0.56	0.86	1.17	1.47	1.78	2.08	2.39	2.69	3.00	10
101	·26	·56	·87	·17	·48	∙78 •79	-0 9 -09	-39 -40	·70 ·70	-00	101
101	·26 ·27	∙57 ∙58	·87 ·88	·18 ·19	·48 ·49	·80	.10	·40	·70	·01	10 <u>1</u> 10 <u>1</u> 10 1
!!.	0.28	0.58	0.89	1.19	1.50	1.80	2.11	2.41	2.72	3.02	.!!
!!#	·28	-59	-89	·20	·50	-81	-!!	·42	·72	·03	
!!\$	·29 ·30	·60	·90	·20 ·21	·51 ·52	·81 ·82	·12 ·13	·42 ·43	·73 ·74	·03 ·04	!!\$
112	.30	-60	-71	-21	-24	-04	-13	73	-/7	-07	112

	10	П	12	13	14	15	16	17	18	19	
0	3.05	3.35	3.66	3.96	4.27	4.57	4.87	5-18	5.48	5.79	0
04	.05	-36	-66	.97	.27	∙58	·88	.19	.49	-80	01
01 01 01 01 01	.06	·36	·67	.97	-28	·58	-89	-19	·50	-80	0 01 01 01
O#	-07	-37	·67	·98	·28	-59	-89	·20	·50	·81	
1.	3.07	3.38	3.68	3.99	4-29	4.60	4.90	5.21	5.51	5.81	.!
<u> </u>	-08 -80	·38 ·39	·69 ·69	.99 4:00	·30	·60 ·61	·91	.21	.27	∙82 ∙83	!#
 	-09	-40	·70	·01	-31	-61	.92	·21 ·22 ·22	·52 ·52 ·53	·83	 2
2 2 2 1 2 2 2 2 2 3	3-10	3.40	3.71	4:01	4.32	4.62	4.93	5.23	5.54	5.84	
2±	-10	-41	·7i	-02	-32	.63	.93	.24	.54	· 8 5	2.1
2 1	-11	-41	.72	.02	.33	-63	.94	.24	∙55	-85	21
2	·12	· 42	.73	.03	∙34	·6 4	·9 4	.25	∙55	∙86	2 2 2 1 2 2 3 2 3
3	3-12	3.43	3.73	4.04	4.34	4.65	4.95	5.26	5.56	5.87	3
34	-13	-43	-74	.04	-35	-65	·96	·26 ·27	·57	-87	34
3 3 3 1 3 2 3 3	-14	-44	.74	-05	-35	-66	.96	·27	·57	-88	31 31 32
3 3	-14	·45	·75	-06	·36	·67	.97	·28	·58	·88	37
4 4 4 4 4 4 4 4	3-15	3.45	3.76	4.06	4.37	4-67	4.98	5.28	5.59	5.89	4
41	-15	·46	·76	·07	.37	·68	.98 .99	-29	-59	·90 ·90	41
4 3	·16 ·17	·47 ·47	.77 .78	.07 .08	·38	·68 ·69	5·00	·29 ·29 ·30	·60 ·61	·90	41 41 42
5	3.17	3.48	3.78	4.09	4.39	4.70	.00	5.31	5.61	5.92	5
5#	-18	·48	.79	.09	·40	.70 .71	-01	·32 ·32	·62 ·62	·92 ·93	51
5 5 5 5 5 2 5	·19	·49 ·50	·80 ·80	·10	-41 -41	·/1 ·72	.01 .02	-32	·62 ·63	·93 ·94	51 51 51
6	3.20	3 50	3.81	4:11	4.42	4·72 ·73	5.03	5.33	5.64	5.94	6
0 4	.21 .21	.51 .52	·81 ·82	·12 ·13	·42 ·43	·73 ·74	.03 .04	·34 ·34	·64 ·65	.95 .95	6
6 6 6 6 6 6 6 6 6 6	-22	-52	-83	-13	-44	.74	.05	.35	-66	.96	6 6 6 6 6 3
-					4.44	4.75					
71	3·22 ·23	3·53 ·54	3·83 ·84	4·14 ·14	4·44 ·45	4·/3	5.05	5.36	5·66 ·67	5·97 ·97	71
7±	-23	-54	-85	-15	-46	·75 ·76	·06 ·07	·36 ·37	-68	.98	71
7 7 7 7 7 7 7 7 7 7	24	.55	· 8 5	-16	.46	.77	-07	38	-68	.99	7 4
8	3·25 ·26	3·55 ·56	3⋅86 ⋅87	4 16 17	4·47 ·47	4·77 ·78	5.08	5·38 ·39	5·69 ·69	5·99 6·00	8
81 Bi	-26	.57	-87	-18	48	.79	·08 ·09	-40	.70	.01	81
8 4 8 2 8 3 8 4	.27	·57	-88	· i 8	·49	·79	·ĭó	·40	·71	٠Ōi	81 81 83
9	3.27	3.58	3.88	4-19	4.49	4.80	5-10	5.41	5.71	6.02	9
91	·28	.59	-89	.20	∙50	-81	-11	-41	·72	.02	91
9 1	.29	.59	.90	∙20	٠5١	-81	-12	-42	.73	∙03	9 <u>1</u>
91 91 92 93	.29	·60	-90	·21	-51	· 82	·12	-43	·73	-04	91 91 93
10	3.30	3.60	3.91	4.21	4.52	4.82	5-13	5.43	5.74	6.04	10
10½ 10½	-31	-61	.92	.22	-53	-83	-14	-44	.74	-05	101 101 103
101	·31	.62 .62	·92 ·93	·23 ·23	·53 ·54	-84 -84	·14 ·15	·45 ·45	·75 ·76	·06	101
104	·32	.07		.722	. 24	.04	.13		./6		104
!!.	·33	3.63	3.94	4.24	4.54	4.85	5.15	5.46	5.76	6.07	- 11
計	·33 ·34	·64 ·64	·94 ·95	25 25	·55	·86 ·86	·16 ·17	·47 ·47	·77 ·78	·08	113
	.34	-65	.95	-26	.56	-87	-17	·48	.78	.09	
· · 4	٠,٠	-		20	30	٠,	• •		, ,	•	4

	20	21	22	23	24	25	26	27	28	29	
0	6-09	6.40	6.70	7.01	7.31	7-62	7-92	8-23	8-53	8-84	0
0 ₹	.10	-41	·71	-01	∙32	∙62	∙93	∙23	-54	·8 4	Ο¥
0 1 0 1	-11	-41	·71 ·72	-02	•33	-63	-94	·24	·55	· 8 5	O₹
0 1	-11	·42	·72	-03	.33	-64	·94	.25	-55	-86	01 01 01
1.	6-12	6-42	6.73	7.03	7.34	7-64	7.95	8-25	8.56	8-86	. !
14	.13	·43	·74	-04	-35	·65	.95	·26	·56 ·57	· 87	!‡
14 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	.13	-44	.74	-05	∙35	•66	.96	.27	.57	-88	!#
	-14	·44	·75	-05	·36	-66	· 9 7	·27	·58	-88	14 14
2 2 2 1 2 2 2	6-14	6-45	6.75	7.06	7.36	7.67	7.97	8-28	8.58	8-89	2
4	-15	.46	·76	·07	-37	-68	.98	.28	.59	-89	21 21 21 21
4	-16	•46	·77	·07	-38	-68	.99	.29	-60	·90	21
	-16	·47	·77	-08	-38	·69	.99	·30	-60	.91	24
3 3 3 3 3	6-17	6.48	6.78	7.08	7-39	7.69	8-00	8-30	8-61	8-91	3
3#	-18	·48	·79	-09	·40	·70	·01	-31	-62	.92	31 31 32
34	.18	.49	·79	.10	-40	·71	-01	·32	·62	.93	₹.
	-19	· 49	-80	·10	-41	-71	-02	·32	·63	· 9 3	
4 44 44 44 44	6-20	6.50	6.81	7-11	7-41	7.72	8-02	8-33	8-63	8-94	4
44	-20	·51 ·51	-81	·12	-42	·73	.03	-34	-64	-95	44
44	-21	.51	·82	·12	-43	·73	-04	.34	-65	-95	- 11
	·21	·52	-82	-13	-43	.74	-04	-35	·65	·96	44
5 51 51	6.22	6.53	6-83	7-14	7.44	7.75	8.05	8.35	8.66	8.96	5 5 <u>1</u> 5 <u>1</u> 5 1
54	.23	·53	-84	-14	.45	·75	-06	·36	·67	·97	54
5 1	.23	-54	-84	-15	-45	·76	-06	.37	·67	∙98	54
5 1	·24	-55	·85	-15	· 4 6	·76	-07	-37	·68	·98	-
6 6 1 6 1 6 1	6.25	6·55 ·56 ·56	6.86	7.16	7.47	7.77	8.08	8.38	8.68	8.99	6
64	∙25	∙56	∙86	·17	·47	·78	·08	-39	-69	9.00	64
61	·26	-56	·87	-17	·48	·78	-09	.39	·70	-00	61 61 61
	·27	·57	-88	-18	·48	·79	-09	· 4 0	·70	-01	
7 74 74 74	6.27	6.58	6.88	7.19	7.49	7.80	8.10	8-41	8.71	9.02	7
4	.28	·58	.89	-19	·50 ·50	-80	-!!	-41	·72	-02	74
<u> </u>	.28	-59	-89	-20	-50	-81	-11	-42	·72	·03	74 74 74 74
<u>/</u> ‡	.29	-60	·90	·21	-51	·82	·12	-42	·73	-03	
8	6.30	6-60	6-91	7.21	7.52	7.82	8-13	8-43	8.74	9.04	8
81	.30	·61	-91	-22	·52	-83	-13	-44	·74	∙05	84
81 81 81 81	-31		·92	.22	-53	-83	-14	-44	·75	-05	81
81	.32	.62	.93	-23	-54	·84	-15	-45	·75	-06	81 81 82
9 9 9 9 9 9	6.32	6.63	6.93	7.24	7.54	7.85	8-15	8.46	8.76	9.07	9
9‡	.33	-63	.94	.24	·55 ·55	∙85	-16	·46 ·47	·77 ·77	∙07	91
91	-34	-64	.95	.25	.55	-86 -87	-16	-47	.77	-08	91 91 91
93	·34	-65	·95	·26	∙56	·87	·17	·48	·78	-09	97
10	6.35	6.65	6.96	7.26	7.57	7.87	8.18	8-48	8.79	9.09	10
101	-35	-66	.96	·27	·57	-88	-18	.49	· 79	-10	10 1 10 1 10 1
10]	∙36	·67	.97	28	·58 ·59	·88 ·89	.19	-49	-80	-10	107
10	∙37	·67	·98	.28	-59	·89	.20	.50	-81	-11	103
П	6-37	6.68	6-98	7.29	7.59	7.90	8-20	8.51	8-81	9-12	- 11
117	∙38	-68	.99	-29	-60	·90	·21	-51	∙82	12	117
	.39	-69	7.00	.30	-61	.91	.22	∙52	∙82	·13	111
114	-39	.70	-00	-31	·61	· 92	∙22	∙53	-83	-14	112

	30	31	32	33	34	35	36	37	38	39	
0	9-14	9.45	9.75	10-06	10-36	10-67	10.97	11.28	11.58	11.89	0
01 01 0	·15 ·15	∙45	∙76	-06	∙37	∙67	∙98	∙28	-59	-89	οŧ
0 <u>¥</u>		· 4 6	.76	·07	-37	-68	·98	∙29	∙59	∙90	0j
0 1	-16	· 4 7	·77	-08	-38	-69	.99	.29	-60	·90	0 1 0 1
1	9-17	9.47	9.78	10.08	10-39	10-69	11-00	11-30	11.61	11.91	1
!#	-17	·48	-78	-09	-39	·70	-00	-31	-61	.92	!#
 	-18	.49	.79	-09	-40	·70	-01	-31	.62	-92	
17	.19	.49	-80	-10	·41	.71	-02	-32	·63	.93	17
2 2 2 1 2 2 2	9-19	9.50	9.80	10-11	10.41	10.72	11.02	11.33	11.63	11-94	2 2 2 2 2 2 3
4	·20	·50 ·51	-81	-!!	·42 ·42	.72 .73	-03	.33	-64	·94	24
4	·21 ·21	·52	·82 ·82	·12	·42	·73	·03 ·04	·34 ·35	-64 -65	·95 ·96	4
3 31 31 31 31	9-22	9.52	9.83	10-13	10.44	10.74	11.05	11-35	11.66	11.96	3
<u>5‡</u>	·22	.53	-83	-14	·44 ·45	·75	·05	-36	-66	·97 ·97	34
3 1	·23 ·24	·54 ·54	·84 ·85	·15	·45 ·46	.76 .76	·06 ·07	·36 ·37	·67 ·68	·97 ·98	3 <u>1</u> 3 <u>1</u> 3 2
			.02	.13	.40	-76	.07		.00		
4	9-24	9.55	9.85	10-16	10.46	10.77	11.07	11.38	11.68	11.99	4 44 44 42
44 44 44	·25	·55	·86	-16	·47	·77	.08	·38	-69	.99	4
<u> </u>	·26	-56	·87	.17	·48	·78	-09	.39	·69	12.00	44
1 ‡	-26	·57	·87	-18	·48	.79	-09	· 4 0	·70	-01	4#
5 5 <u>1</u> 5 <u>1</u> 5 2	9.27	9.57	9.88	10-18	10-49	10.79	11.10	11:40	11.71	12-01	5 5 5 5 5
54	-28	-58	-89	.19	-49	-80	-10	-41	.71	.02	54
5 <u>‡</u>	·28	.59	-89	-20	-50	-81	-11	-42	·72	.03	51
	.29	.59	·90	·20	-51	-81	·12	· 4 2	·73	·03	5 ‡
6	9.29	9.60	9.90	10.21	10.51	10.82	11-12	11.43	11.73	12.04	6
64	∙30	-61	-91	.22	-52	.82	.13	.43	-74	-04	64
64 64 64	-31	-61	.92	.22	·53	.83	.14	-44	·75	·05	61 61
	-31	·62	·92	·23	·53	-84	-14	.45	·75	-06	
7	9.32	9.62	9.93	10.23	10.54	10.84	11.15	11.45	11.76	12.06	7
74 74 74 74	33	.63	.94	.24	.55	85	.16	.46	·76	-07	71
<u>7</u> }	.33	-64	-94	-25	-55	-86	-16	·47	·77	-08	7 <u>1</u> 7 <u>1</u> 7 <u>1</u> 7 <u>1</u>
/ ‡	·34	·6 4	·95	.25	·56	-86	·17	· 4 7	·78	-08	
8	9.35	9.65	9.95	10.26	10.56	10.87	11-17	11.48	11.78	12.09	8
84	.35	-66	.96	·27	-57	-88	·18	.49	.79	-09	84
8 <u>1</u> 8 <u>1</u> 8 <u>1</u>	.36	•66	.97	·27	·58	-88	.19	.49	-80	-10	81 81 81
	-36	·67	.97	-28	-58	-89	-19	·50	-80	-11	
9	9.37	9.68	9.98	10.29	10.59	10.89	11.20	11.50	11.81	12-11	9 9 9 9 9 3
才	·38	-68	.99	.29	-60	.90	-21	-51	·82	-12	24
91 91 9 1	·38	·69 ·69	.99 10:00	·30	·60 ·61	·91 ·91	·21 ·22	·52 ·52	·82 ·83	·13	31
	.37	.07	10.00	.30	.01	.71	.77	-52	.03	.13	
10	9.40	9.70	10.01	10-31	10-62	10.92	11.22	11.53	11.83	12-14	10
101	·40 ·41	·71 ·71	.01 .02	∙32 ∙32	·62 ·63	.93 .93	·23 ·24	·54 ·55	∙84 •85	·15 ·15	101
10 <u>1</u> 10 <u>1</u> 10 2	·42	·71	·02	.33	-63	·93 ·94	·24	·55	·85	.16	101 101 102
	9.42	9.73	10-03	10-34	10-64	10.95	11.25	11-56	11.86	12-16	
111	·43	·73	·04	·34	·65	.95	·26	.56	·87	·17	111
ijĪ	·43	·73	-04	.35	·65	.96	.27	-57	·87	-18	iiī
	-44	.75	-05	-36	-66	.96	.27	.57	-88	18	- <u> -</u> <u>-</u> -
- '4	-77	.,,		- 50		- ,0					

	40	41	42	43	44	45	46	47	48	49	
0	12-19	12-49	12.80	13-10	13-41	13.71	14.02	14-32	14-63	14-93	0
0 <u>1</u>	.20	-50	-81	-11	-42	.72	-03	-33	-64	·94	01
01	.20	.51	-81	.12	-42	.73	.03	-34	-64	.95	이 이
0 1	·21	-51	· 8 2	·12	·43	.73	-04	-34	·65	· 9 5	
1.	12-22	12-52	12.83	13-13	13-43	13.74	14-04	14-35	14-65	14.96	. !
!#	·22 ·23	-53	·83	-14	-44	·75	·05	.36	•66	·97	!#
14	.23	·53 ·54	·84 ·84	·14 ·15	·45 ·45	.75 .76	-06 -06	·36 ·37	·67 ·67	.97 .98	
2	12.24	12.55	12.85	13-16	13.46	13.76	14.07	14-37	14-68	14-98	2
24 24 24 24	-25	-55	-86	-16	.47	-77	-08	-38	-69	.99	21 21 21 21
21	·25	·56	·86	-17	.47	·78	-08	.39	.69	15-00	21
	·26	·56	· 8 7	-17	·48	·78	-09	-39	-70	-00	2#
3	12-27	12-57	12.88	13-18	13-49	13.79	14-10	14-40	14.70	15-01	3
3∦	·27	-58	-88	-19	-49	-80	-10	-41	·71	-02	3‡
31 31 32	28	∙58	-89	-19	·50	-80	- 11	.41	.72	-02	3 <u>1</u>
32	·29	.59	·90	.20	.50	-81	- 11	· 4 2	·72	-03	31 31 32
4	12-29	12-60	12.90	13-21	13-51	13-82	14-12	14-43	14.73	15-03	4
41	-30	-60	.91	-21	.52	-82	-13	-43	.74	-04	41
41	-30	-61	-91	.22	·52	-83	-13	-44	.74	-05	41
44 44 44	.31	·6 2	· 9 2	·23	∙53	-83	-14	-44	· 7 5	-05	41 41 41
5	12-32	12-62	12-93	13-23	13-54	13-84	14-15	14.45	14.76	15-06	5 5 1 5 5 3
51 51 51 51	.32	-63	.93	.24	·54	-85	-15	-46	.76	-07	54
51/2	.33	-63	-94	-24	-55	-85	-16	-46	·77	-07	51
57	.34	·64	.95	.25	-56	-86	-17	· 4 7	·77	-08	-
6	12.34	12.65	12.95	13-26	13.56	13.87	14-17	14-48	14.78	15.09	6 6 6 6
6 1 6 1	∙35	-65	-96	·26	∙57	-87	-18	· 4 8	·79	-09	64
61/2	.36	-66	.96	·27	·57	-88	-18	-49	.79	.10	61
	·36	·67	.97	·28	-58	-89	.19	·50	-80	·10	
7.	12.37	12-67	12.98	13-28	13.59	13.89	14.20	14-50	14.81	15-11	7
7±	-37	-68	∙98	·29	:59	∙90	-21	-51	-81	-12	7‡
7]	∙38	-69	-99	∙30	-60	∙90	-21	-51	-82	-12	71
74 74 74 74	.39	-69	13.00	-30	-61	·91	.22	-52	-83	·13	7 <u>1</u> 7 <u>1</u> 7 2 7 2
8	12.39	12.70	13.00	13.31	13-61	13.92	14.22	14-53	14-83	15-14	8
81	-40	·70	.01	-31	-62	-92	·23	-53	-84	-14	81 81 81
8 <u>1</u> 8 1	-41	-71	-02	.32	-63	.93	.23	-54	-84	-15	81
8#	·41	·72	·02	.33	·63	-94	·24	-55	-85	-16	84
9	12.42	12.72	13.03	13.33	13-64	13.94	14-25	14.55	14.86	15-16	9 9 9 9 9
94 94 93 93	·43 ·43	·73 ·74	.03 .04	-34	-64	.95	.26	·56	-86	-17	74
7 2	·43 ·44	·/4 ·74	·0 4	·35	·65 ·66	·96 ·96	·26 ·27	·57 ·57	-87 -88	·17 ·18	34
10	12:44 :45	12·75 ·76	13·05 ·06	13·36 ·36	13-66 -67	13·97 ·97	14·27 ·29	14·58 ·58	14·88 ·89	15·19 ·19	10
101	·46	·76	.07	.37	·68	·98	.29	·59	·90	·19	101
10} 10}	-46	.77	.07	.38	-68	.99	.29	.60	.90	·20	10 <u>1</u> 10 1 10 1
ii	12.47	12.77	13.08	13.38	13-69	13.99	14-30	14-60	14.91	15-21	11
111	·48	·78	.09	.39	.70	14.00	-31	.61	-91	.22	Ιİİ
Ϊij	·48	.79	.09	.40	.70	-01	·3i	-62	.92	·23	111
111	-49	.79	.10	.40	·7Î	·Õİ	.32	-62	.93	·23	

	50	51	52	53	54	55	56	57	58	59	
0	15-24	15-54	15.85	16-15	16.46	16.76	17-07	17.37	17-68	17.98	0
0‡	.24	-55	-85	.16	·46	·77	-07	.38	-68	.99	٥ŧ
04 04 04	.25	.56	·86	-17	·47	.77	-08	.38	·69	.99	01 01 01
03	·26	·56	·87	·17	·48	-78	.09	.39	·70	18.00	—— 0
<u>I.</u>	15.26	15.57	15.87	16-18	16.48	16.79	17.09	17-40	17.70	18.01	.!
<u> </u> ‡	·27 ·28	·57 ·58	· 88 ·89	·18	·49 ·50	.79 ⋅80	·10	·40 ·41	·71 ·71	·01 ·02	!#
 	·28	.59	·89	·19	·50	·81	- :	·41			
2	15·29 ·30	15·59 ·60	15·90 ·90	16.20	16.51	16·81 ·82	17.12		. 17·73 ·73		2
24	.30	·61	.90	·21 ·22	·51 ·52	·82	·12 ·13	·43 ·44	·/3 ·74	·04 ·04	24
- 2⅓ 2⅓ 2¾	-31	-61	.92	-22	-53	-83	-14	-44	-75	.05	21 21 22
<u>-</u> -	15.31	15.62	15.92	16.23	16.53	16.84	17:14	17:45	17:75	18.06	3
3 ⊤	.32	.63	.93	-24	.54	-84	.15	.45	.76	.06	37
31	.33	.63	.94	-24	.55	-85	.16	-46	-77	.07	31
34 3½ 3¾	.33	-64	.94	-25	-55	-86	·16	· 4 7	-77	.08	31 31 33
4	15-34	15-64	15.95	16.25	16.56	16.86	17-17	17-47	17.78	18.08	4
41 41 43 43	∙35	-65	.96	.26	-57	-87	-17	·48	.78	-09	41
4 <u>i</u>	.35	.66	.96	·27	.57	-88	.18	-49	.79	-10	41
43	.36	.66	.97	·27	·58	.88	.19	.49	-80	·10	44 44 44
5	15.37	15-67	15.97	16.28	16.58	16-89	17-19	17.50	17-80	18-11	_5
5#	.37	-68	.98	-29	-59	.90	.20	.51	-81	.11	54
5 5 <u>4</u> 5 <u>2</u> 5 2	·38 ·38	·68 ·69	.99 .99	· 29 · 30	.60 .60	·90 ·91	·21	·51 ·52	·82 ·82	·12 ·13	5 5 <u>1</u> 5 <u>1</u> 5 2
<u>-</u>	15.39	15.70	16.00	16.30	16.61	16.91	17-22	17.52	17.83	18-13	
<u>61</u>	-40	-70	-01	.31	-62	.92	23	53	.84	.14	٧٢
61	·40	71	·01	-32	-62	.93	-23	-54	-84	-15	61
6 1 6 1 6 3	· 4 1	.71	.02	-32	-63	.93	-24	∙54	-85	-15	6 1 6 1 6 1
7	15-42	1.5.72	16.03	16-33	16-64	16-94	17-24	17.55	17.85	18-16	7
7	·42	.73	-03	∙34	-64	.95	.25	∙56	-86	-17	7∤
7 <u>‡</u>	-43	.73	-04	.34	.65	.95	·26	·56	·87	-17	7 7 7 1 7 2 7
7 3 	·44	·74	-04	-35	-65	.96	·26	·57	·87	·18	
8	15-44	15.75	16.05	16.36	16.66	16.97	17-27	17-57	17.88	18-18	8
84	.45	·75	.06	·36	·67	.97	·28	·58	·89 ·89	-19	81
8 <u> </u> 8 <u> </u> 8 <u>3</u>	·45 ·46	·76 ·77	∙06 ∙07	-37 -37	·67 ·68	·98 ·99	·29 ·29	·59 ·59	.90	∙20 ∙20	81 81 81
9	15·47 ·47	15·77 ·78	16·08 80·	16·38 ·39	16·69 ·69	16·9 9 17·00	17·30 ·30	17·60 ·61	17·91 ·91	18∙21 •22	9 9 9 9 9 7
91	-48	.78	.09	.39	.70	.00	-31	·6i	.92	.22	91
9 1 9 1 9	.49	.79	·10	· 4 0	.71	·01	-31	-62	.92	.23	94
10	15-49	15-80	16-10	16-41	16.71	17.02	17-32	17-63	17.93	18-24	10
104	.50	-80	-11	-41	·72	.02	.33	-63	-94	·24	101
10#	.50	-81	-11	· 42	·72	.03	.33	-64	∙94	∙25	10#
104	·51	-82	·12	·43	·73	-04	.34	·6 4	.95	.25	10 \$
11	15.52	15.82	16-13	16-43	16.74	17.04	17-35	17-65	17.96	18-26	
114	-52	-83	.13	.44	·74	.05	.35	-66	·96	-27	111
	·53	·84	-14	·44	·75	.06	·36	·66	.97	.27	111
114	-54	·8 4	-15	· 4 5	.76	∙06	∙37	∙67	·98	∙28	ΠŽ

	60	61	62	63	64	65	66	67	68	69	
04	18-29	18-59	18-90	19-20	19-51	19-81	20-11	20-42	20.72	21.03	0
0-1 0-1 0-1	∙29	-60	∙90	-21	٠5١	∙82	-12	-43	.73	-04	οŧ
0 <u>}</u>	-30	-60	.91	-21	-52	-83	-13	-43	·7 4	-04	ΟŢ
0 }	-31	.61	.91	·22	-52	-83	-13	·44	·74	-05	0 <u>1</u>
!	18-31	18-62	18-92	19-23	19-53	19-84	20-14	20.44	20.75	21.05	. !
 	.32	·62	.93	·23	-54	·84	.15	•45	.76	-06	!#
! ‡	.32	·63 ·64	·93 ·94	·24 ·25	∙54 •55	-85	-15	.46	·76	.07 .07	14
1#	-33		.74	.25	.55	· 8 5	-16	· 4 6	·77		
2	18-34	18-64	18-95	19-25	19.56	19.86	20-17	20-47	20.78	21.08	2
4	·34 ·35	·65 ·65	·95 ·96	·26 ·26	·56 ·57	·87 ·87	·17 ·18	·48 ·48	·78 ·79	.09 .09	21
2 24 24 24 24	.36	.66	.97	.27	·58	-88	-18	-49	.79	-10	21 21 23 23
3	18-36	18-67	18-97	19.28	19.58	19.89	20-19	20.50	20.80	21-11	3
31	.37	·67	.98	-28	.59	.89	-20	-50	-81		3 <u>T</u>
31	.38	-68	-98	.29	.59	.90	·20	.51	·8i	·i2	31
31 31 32	-38	.69	.99	-30	.60	.91	-21	·52	·82	·12	34 34 34
•	18-39	18-69	19.00	19-30	19-61	19·9i	20-22	20.53	20-83	21-13	4
4	-39	∙70	-00	-31	-61	.92	∙22	∙53	-83	-14	41
4 <u>i</u>	∙40	٠7١	-01	٠3١	∙62	.92	∙23	∙53	-84	-14	41
41 41 42	-41	·71	-02	.32	.63	.93	·24	·54	-85	·15	41 41 43 43
5 54 54 54 54	18-41	18.72	19-02	19-33	19-63	19.94	20-24	20.55	20.85	21-16	5
54	· 4 2	·72	.03	.33	-64	.94	.25	.55	-86	-16	54
<u>5‡</u>	-43	.73	-04	.34	.65	.95	.25	.56	.86	.17	51 51 52
5 }	·43	.74	-04	-35	-65	.96	-26	·57	·87	·18	<u>5</u>
6	18-44	18.74	19.05	19-35	19-66	19.96	20.27	20-57	20.88	21-18	6
64	·44 ·45	·75 ·76	·05 ·06	·36 ·37	·66 ·67	·97 ·88	·27 ·28	· 58 · 58	·88 ·89	·19	04
6] 6]	·46	·76	-05	·37	-68	-98	.29	.59	.90	-20	61 61 61
7.	18:46	18.77	19-07	19-38	19-68	19.99	20-29	20.60	20.90	21.21	7
7‡	·47	·78	-08	.38	-69	.99	-30	.60	.91	·21	7‡
7 <u> </u> 7 7 	·48	·78	-09	-39	·70	20.00	.31	.61	.92	·22	74 74 74 74
<u>*</u>	·48	.79	-09	· 4 0	·70	·01	-31	·62	.92	·23	
8	18-49	18·79 ⋅80	19·10	19·40 ·41	19.71	20.01	20.32	20.62	20·93 ·93	21·23 ·24	8
8 1	·50 ·50	·81	- :::	·42	·71 ·72	-02 -03	·32 ·33	·63 ·64	·93 ·94	·24 ·25	9
8 <u>1</u> 8 1	·50	-81	-11	·42	·72	·03	·34	-64	·95	·25	81 81 81
9	18.51	18-82	19-12	19-43	19.73	20.04	20.34	20.65	20.95	21.26	9
9 <u>‡</u> 9 <u>‡</u>	·52	·83	-13	-44	74	-05	.35	·65	·96	·26	24
7± 03	·53	·83	-14	·44 ·45	·75 ·75	.05 .06	·36	·66	.97 .97	-27	91 91 91
9 1 ——	.53	·84	-14	· 1 5	./5	-06	-36	·67	.9/	·28	7 1
10	18.54	18-84	19-15	19-45	19.76	20-06	20-37	20.67	20.98	21.28	10
101	·55 ·55	· 8 5 · 8 6	·16	·46 ·47	·77 ·77	-07 -08	·38	·68 ·69	.99 .99	·29 ·30	101
10 <u>‡</u> 10 ‡	·56	·86	·16 ·17	·47	·77	·08	·39	·69	21.00	·30	10 <u>1</u> 10 <u>1</u>
 	18-57	18-87	19-18	19.48	19.78	20.09	20.39	20.70	21.00	21.31	
	·57	.88	-18	.49	.79	·10	·40	·71	-01	.32	- 111
• • 4	-58	-88	-19	-49	-80	-10	·41	.71	-02	.32	
111											

	70	71	72	73	74	75	76	77	78	79	
0	21-33	21-64	21-94	22-25	22.55	22.86	23-16	23-47	23.77	24.08	0
01	-34	.65	.95	-25	·56	-86	-17	-47	·78	-08	01
01	∙35	· 6 5	.96	·26	∙57	-87	-18	·48	∙79	-09	01
01 01 03	-35	-66	-96	·27	.57	-88	-18	.49	.79	-10	0 1
1	21.36	21-66	21.97	22-27	22.58	22.88	23-19	23-49	23-80	24-10	1
ݱ	.37	·67	.98	·28	∙59	-89	-19	∙50	-80	-11	14 15 13
 <u> </u>	∙37	∙68	-98	-29	-59	.90	20	-51	-81	·12	ļ <u>i</u>
13	.38	-68	.99	.29	.60	·90	·21	.51	·82	·12	
2	21.38	21.69	21.99	22.30	22.60	22.91	23.21	23.52	23.82	24-13	2
2 \\ 2 \\ \\ 2 \\ \\ \\ \\ \\ \\ \\ \\ \	.39	·70	22.00	-31	.61	.92	.22	-52	-83	.13	24
21	·40	·70	.01	-31	·62	·92 ·93	·23 ·23	·53	·84	-14	21 21
23	· 4 0	·71	-01	-32	·62	.73		-54	-84	-15	
3	21.41	21.72	22.02	22.32	22.63	22.93	23-24	23.54	23.85	24-15	3 3 3 3 3
34	.42	·72	.03	.33	.64	.94	.25	.55	.86	.16	34
31	·42	·73	·03	·34	-64	·95	·25	-56	∙ 86 ∙87	·17	3 <u>‡</u>
3 4	·43	·73	-04	-34	-65	·95	·26	·56		·17	
4	21.44	21.74	22.05	22.35	22.65	22.96	23.26	23.57	23.87	24.18	4
41	.44	·75	.05	.36	-66	.97	.27	·58	-88	.19	41 41 41 41
41/4 41/4 41/4	·45	.75 .76	-06 -06	·36 ·37	·67 ·67	.97 .98	·28 ·28	·58 ·59	·89 ·89	·19 ·20	43
	· 4 5	-/6	-06	.3/	.6/	.70	-26			-20	
5 5 <u>1</u> 5 <u>1</u>	21.46	21.77	22.07	22.38	22.68	22.99	23.29	23.59	23.90	24·20	5
54	.47	.77	.08	.38	-69	.99	-30	-60	.91	·21	54
5 <u>1</u>	.47	·78	-08	.39	·69	23.00	.30	-61	.91	.22	51 51
5 3	·48 	.79	-09	-39	·70	-00	-31	·61	.92	·22	
6	21.49	21.79	22-10	22-40	22.71	23.01	23.32	23-62	23.92	24.23	6
6 1	-49	.80	.10	-41	.71	-02	.32	-63	.93	·24	61 61 61
6 1	·50 ·51	-80 -81	·11 ·12	·41 ·42	·72 ·72	.02 .03	·33	·64 ·64	.94 .94	·24 ·25	0 <u>1</u>
6 3	.21	.01	-12			.03	.33	-04	.74	.25	
7	21.51	21.82	22.12	22-43	22.73	23.04	23-34	23.65	23.95	24.26	7
74	-52	.82	-13	·43	·74	-04	.35	-65	.96	-26	74
74 74 72 73	-52	-83	.13	.44	.74	-05	.35	-66	.96	·27	714 719 733 734
/ ‡	.53	·8 4	·14	·45	.75	-06	-36	·66	·97	.27	
8	21.54	21.84	22.15	22-45	22.76	23.06	23.37	23-67	23.98	24.28	. 8
84	.54	-85	.15	.46	·76	-07	.37	-68	.98	-29	84
-8 ¹ / ₂	.55	·85	.16	.46	·77	·07	.38	.68	.99	·29	8 <u>1</u> 8 <u>3</u>
83	·56	·86 	-17	.47	·78	-08	-39	·69	.99	-30	-
9	21.56	21.87	22.17	22.48	22.78	23.09	23.39	23.70	24.00	24.31	9
9‡	·57	·87	.18	·48	.79	-09	·40	.70	.01	-31	91
91	·58	-88	-19	·49 ·50	.79 .80	·10	·40 ·41	·71 ·72	·01 ·02	.32	9 <u>1</u> 9 1
9 3	·58	.89	-19		-80	•11	-41		-02	.33	
10	21.59	21.89	22.20	22.50	22.81	23-11	23.42	23.72	24.03	24.33	10
101	.59	.90	.20	.51	-81	.12	·42 ·43	·73	.03	·34	101
10 <u>1</u> 10 1	·60 ·61	·91	·21 ·22	·52 ·52	∙82 ∙83	·12 ·13	·43 ·44	-74 -74	·04 ·05	·34 ·35	10 <u>1</u> 10 <u>1</u>
!!.	21.61	21.92	22.22		22.83	23.14	23.44	23.75	24.05	24.36	.!!
 	·62	.92 .93	.23		-84	-14	·45 · 46	·75 ·76	.06	·36	114
11 <u>}</u> 11 2	·63 ·63	.93 .94	·24 ·24		·85 ·85	·15 ·16	· 4 6	·/6 ·77	·06 ·07	∙37 ∙38	
114	.03	. 74	.74	.,,	-03	-10	-70				114

	80	81	82	83	84	85	86	87	88	89	
0	24-38	24-69	24-99	25.30	25-60	25.91	26-21	26.52	26-82	27-13	
ο¥	.39	-60	25.00	-30	-61	.91	-22	∙52	-83	·13	01
0 <u>1</u>	.39	.70	.00	.31	-61	.92	.22	.53	-83	-14	oj Oj
0 1	·40	·71	-01	-32	·62	.93	.23	-53	·84	-14	
1	24-41	24.71	25.02	25.32	25.63	25.93	26-24	26.54	26.85	27-15	1
!#	-41	·72	·02	.33	.63	.94	·24	.55	-85	.16	!#
 	·42	.73 .73	-03 -04	·33 ·34	·64 ·65	·94 ·95	.25	·55	·86	-16	
17	· 4 3	./3					·26	-56	·87	·17	
2	24-43	24.73	25.04	25.35	25.65	25.96	26.26	26.57	26.87	27-18	2
21 21	.44	.74	-05	.35	.66	·96	.27	·57	-88	-18	24
2 1 2 1 2	·45 ·45	·75 ·76	∙06 •06	·36 ·37	·66 ·67	·97 ·98	·27 ·28	·58 ·59	·88 ·89	·19 ·20	21 21 21
3	24.46	24.76	25.07	25.37	25.68	25.98	26.29	26.59	26.90	27.20	3
34	·46	.77	·07	.38	·68	.99	.29	.60	.90	-21	3‡
3 1/2 3 1/2	·47 ·48	.78 .78	·08 ·09	·39 ·39	·69 ·70	26·00 ·00	.30	.60	·91 ·92	·21 ·22	31 31 32
	.40						.31	.61			
4	24.48	24.79	25.09	25.40	25.70	26.01	26.31	26.62	26.92	27.23	4
41	-49	.79	-10	· 4 0	·71	-01	.32	.62	.93	·23	44 44 43
41 42 42	·50 ·50	·80 ·81	11 11	·41 ·42	·72	.02 .03	.33	.63	.93 .94	·24	44
					·72		-33	·64		·25	
5	24.51	24.81	25-12	25.42	25.73	26.03	26.34	26-64	26.95	27.25	_5
54	·52	·82	-13	-43	·73	-04	·34	·65	.95	·26	54
5 1/2 5 1/4	·52 ·53	·83	·13	·44 ·44	·7 4 ·75	·05 ·05	·35 ·36	·66 ·66	·96 ·97	·27 ·27	51 51 52
6	24.53	24.84	25-14	25.45	25.75	26-06	26.36	26.67	26.97	27.28	6
61	·54 ·55	·85 ·85	·15	·46 ·46	·76 ·77	·06 ·07	·37 ·38	·67 ·68	·98 ·99	·28 ·29	64
61/2 61/4	.55	.86	-18	·47	·// ·77	.08	.38	·69	.99	·30	61 61 61
7	24.56	24.86	25-17	25.47	25.78	26.08	26.39	26-69	27.00	27.30	7
74	·57 ·57	·87 ·88	·18	·48 ·49	.79 .79	.09 ·10	·40 ·40	·70 ·71	.00 10:	-31 -32	/ †
7 ½ 7 ¾ 7 ¾	.58	.88	-19	.49	.80	-10	-41	-71	-01	·32	74 75 73 74
8	24.59	24.89	25.19	25.50	25.80	26-11	26.41	26.72	27.02	27.33	8
84	·59 ·60	·90 ·90	·20 ·21	·51 ·51	-81	12	·42 ·43	·73 ·73	-03 -04	·33 ·34	81
8 ½ 8 ½	-60	.91	.21	.52	·82 ·82	·12 ·13	.43	·74	-04	-35	8 <u>1</u> 8 1
9	24.61	24.92	25.22	25.53	25.83	26-13	26.44	26.74	27.05	27.35	9
91	·62 ·62	.92 .93	·23 ·23	·53 ·54	·84 ·84	·14 ·15	·45 ·45	.75 .76	.06 .06	∙36 ∙37	94 91 94
91 91	·62	.93	·23 ·24	-54	·85	·15	·46	·76	·06	·37	3
10	24-64	24.94	25.25	25.55	25.86	26-16	26.47	26.77	27.07	27.38	10
104	-64	.95	·25	·56	·86	-17	·47	·78	.08	.39	101
101	·65	.95 .96	26	·56 ·57	∙87 ∙87	·17 ·18	·48 ·48	·78 ·79	.09 .09	.39 .40	10 <u>1</u> 10 <u>1</u>
103	·66 		·26								
11	24.66	24·97 ·97	25·27 ·28	25·58 ·58	25·88 ·89	26·19 ·19	26·49 ·50	26·80 ·80	27·10 ·11	27·40 ·41	111
	.67 .67	·97	·28	·58	·89	·19	·50	·81	- :	· 4 1	111
113	·68	.99	-29	.60	.90	.20	·51	-81	-12	·42	
4											

FEET AND INCHES TO METRES. (70 ft. - 349 ft. 11 inches in inches)

	Feet	(16 3-	.,		C3 III (ilciies	,			
	70	71	72	73	74	75	76	77	78	79	
Inches											
0	21-34	21-64	21.94	22.26	22.56	22.86	23-16	23.48	23.78	24.08	0
1	.36	.66	98	.28	∙58	-88	·20	-50	-80	.10	- 1
2 3 4	.38	·70	22.00	.30	.60	.92	.22	-52	-82	-14	2
3	.42	·72	-02	.32	-64	-94	.24	-54	-86	.16	3
1	-44	·74	-04	.36	.66	.96	.26	·58	-88	.18	4
2	·46	·78	-08	·38	·68	.98	-30	.60	-90	·20	5
7	·50 ·52	∙80 ∙82	·10 ·12	·40 ·44	·72 ·74	23-02 -04	·32	-62	.92	·24	6 7
5 6 7 8	·54	·84	.16	·46	·76	·04	·34 ·38	·66 ·68	·96 ·98	·26 ·28	8
9	.56	-88	-18	.48	.78	-10	·40	.70	24.00	-32	9
ío	.60	.90	.20	.50	-82	-12	·42	.72	-04	-34	10
iĭ	.62	.92	.22	-54	-84	·i4	.44	.76	-06	.36	iĭ
	80	81	82	83	84	85	86	87	88	89	
0 I	24·38 ·42	24·70 ·72	25·00 ·02	25·30 ·32	25·60 ·64	25·92 ·94	26·22 ·24	26·52 ·54	26.82	27-12	o
2	·42 ·44	·72 ·74	·02 ·04	·32	·66	·9 4 ·96	·2 4 ·26	·54 ·58	·86 ·88	.16 .18	1
2 3 4 5 6 7	·46	.76	.08	.38	-68	-98	-30	.60	.90	-10	2
4	·48	-80	.10	·40	.70	26.02	-32	-62	-92	·24	4
5	·52	-82	.12	.42	.74	-04	-34	-64	.96	.26	ξ.
6	-54	-84	· i4	-46	.76	-06	-36	-68	·98	·28	5 6
7	·56	-86	-18	.48	.78	-08	-40	.70	27.00	-30	7
8	.58	.90	.20	-50	-80	·12	-42	·72	-02	-34	8
9	.62	.92	·22	.52	·8 4	-14	-44	-74	-06	∙36	9
10	-64	.94	.26	∙56	-86	∙16	·46	.78	-08	∙38	10
11	.66	.98	·28	·58	-88	.20	.50	-80	-10	· 4 0	- 11
	90	91	92	93	94	95	96	97	98	99	
0	27-44	27.74	28-04	28-34	28-66	28-96	29.26	29.56	29.88	30-18	0
1	.46	.76	-06	-38	-68	.98	∙28	-60	.90	·20	ı
2 3 4	·48	-80	-10	.40	.70	29.00	.32	-62	.92	-22	2 3 4
3	.52	-82	-12	.42	.74	-04	-34	-64	.94	.26	3
4	-54	-84	-14	·46	·76	-06	.36	·66	.98	·28	4
2	·56 ·58	·86 ·90	·18 ·20	·48 ·50	.78 ⋅ 8 0	-08 -12	·40 ·42	·70	30.00	-30	5
5 6 7	-62	.92	·20	·50	·84	-12	·42 ·44	·72 ·74	-02 -06	·34 ·36	7
8	-64	.94	-24	.56	-86	-16	.46	.78	-08	-38	8
9	-66	.96	-28	-58	.88	-18	.50	.80	.10	-40	9
ío	.68	28.00	.30	.60	.90	-22	·52	·82	٠i٤	.44	ıó
ii	·72	-02	.32	-64	.94	-24	-54	-84	·i6	-46	ii
	100	101	102	103	104	105	106	107	108	109	
0	30.48	30.78	31-10	31.40	31.70	32.00	32.32	32-62	32.92	33-22	0
1	-50	-82	.12	.42	.72	-04	-34	-64	-94	.26	ĭ
2	-54	-84	-14	-44	.76	-06	-36	-66	·98	·28	2
3	∙56	-86	-16	·48	.78	-08	∙38	.70	33.00	.30	2 3
2 3 4 5	∙58	·88	·20	∙50	-80	-10	-42	.72	.02	∙32	4
5	-60	.92	·22	∙52	.82	-14	-44	·7 4	-04	∙36	5
6	-64	.94	-24	-54	-86	-16	.46	.76	-08	∙38	6
7	-66	-96	.28	-58	-88	.18	·48	.80	.10	-40	7
8	.68	31.00	.30	.60	.90	.20	.52	·82	.12	.42	8
9	-72	-02	.32	·62	.94	-24	-54	-84	-14	.46	9
10	-74	-04	.34	.66	-96	·26	-56	-88	-18	· 4 8	10
11	.76	-06	∙38	-68	.98	-28	-60	· 90	-20	∙50	11

	110	111	112	113	114	115	116	117	118	119	
0	33-54	33-84	34-14	34-44	34.74	35-06	35-36	35-66	35.96	36-28	0
1 2 3 4 5 6 7 8	∙56	-86	∙16	·48	∙78	-08	∙38	∙68	36.00	∙30	1 2 3 4 5 6 7
2	∙58	-88	∙20	∙50	-80	-10	· 4 2	.72	-02	∙32	2
3	-60	.92	•22	∙52	-82	-14	-44	·74	-04	∙36	3
•	-64	-94	·24	-54	-86	-16	· 4 6	.76	-08	∙38	4
5	-66	-96	·26	-58	-88	-18	·48	-80	-10	-40	5
5	-68	-98	-30	-60	·90	-20	-52	-82	.12	-42	6
7	·70	34.02	-32	-62	-92	-24	-54	-84	·i4	·46	7
	.74	-04	-34	-64	.96	.26	-56	-86	-18	-48	8
	.76	-06	-36	-68	-98	-28	-58	.90	-20	.50	9
7				.00	.70		.20			.20	
10	·78	-08	·40	·70	35.00	-30	-62	.92	.22	·52	10
11	·82	·12	·42	·72	-02	-34	-64	-94	·24	·56	- 11
	120	121	122	123	124	125	126	127	128	129	
)	36.58	36-88	37-18	37.50	37-80	38-10	38-40	38.72	39-02	39-32	0
1 2 3 4 5 6 7 8 9	·60 ·62	·90 ·94	·22 ·24	·52 ·54	-82	.12	-44	·74	-04	-34	ı
2	-62		·2 4	-54	·8 4	· ·16	· 4 6	.76	-06	∙38	2
3	-66	-96	∙26	∙56	-88	.18	· 4 8	.78	-10	-40	3
4	-68	-98	-28	-60	-90	·20	-50	-82	·12	· 4 2	4
5	·70	37.02	.32	-62	-92	.22	-54	-84	·14	-44	5
5	.74	-04	.34	-64	.96	·26	.56	-86	-16	-48	2 3 4 5 6 7 8
,	·76	-06	.36	-68	·98	·28	·58	.90	20	·50	ž
,	.78	-08	·40	.70	38.00	-30	-62	.92	.22	-52	,
2		-12	42		-02						٥
,	-80		·42	.72	.02	-34	-64	.94	.24	·56	9
10	-84	-14	-44	.74	-06	∙36	.66	.96	-28	∙58	10
11	·86 	-16	·46	·78	-08	-38	·68	39.00	-30	·60	- 11
	130	131	132	133	134	135	136	137	138	139	
0	39-62	39-94	40-24	40-54	40.84	41-16	41.46	41.76	42.06	42.36	0
ı	-66	.96	∙26	-56	-88	-18	·48	.78	-10	· 4 0	1
2	∙68	∙98	∙28	-60	-90	∙20	∙50	-82	∙12	· 42	2 3 4 5 6 7
3	.70	40.00	∙32	-62	.92	∙22	∙54	-84	- 14	-44	3
4	·72	-04	-34	-64	.94	∙26	∙56	-86	-16	·48	4
5	.76	-06	∙36	-66	.98	·28	∙58	-88	·20	·50	5
6	·78	-08	.38	.70	41.00	-30	-60	.92	·22	·52	6
7	-80	-10	.42	·72	.02	-32	-64	.94	-24	-54	ž
2	.82	-14	-44	.74	-04	.36	-66	.96		.58	8
1 2 3 4 5 6 7 8	·84	-16	·46	·76	-08	.38		.20	·26	.20	٥
7			.40		.09	.72	·68	.98	.30	.60	9
10	-88	-18	-50	-80	-10	·40	·70	42.02	-32	-62	10
11	-90	·22	·52	·82	·12	·44	·74	-04	·3 4	·6 4	
	140	141	142	143	144	145	146	147	148	149	
0	42.68	42.98	43.28	43.58	43.90	44-20	44.50	44-80	45-12	45.42	0
1	·70	43.00	-30	-62	.92	.22	-52	-84		-44	1
2	.72	-04	-34	-64	·94 ·98	-24	∙56	-86	.16	· 46	2 3 4 5 6 7
3	.76	-06	∙36	-66	98	∙28	∙58	-88	-18	∙50	3
4	.78	•08	∙38	∙70	44.00	∙30	-60	∙90	·22	∙52	4
5	-80	-10	· 4 2	.72	.02	∙32	-64	.94	.24	·54	5
6	-82	-14	.44	.74	-04	-36	-66	.96	.26	·58	6
7	-86	.16	·46	.76	-08	-38	-68	-98	-30	-60	7
_	-88	·i8	·48	-80	.10	-40	.70	45.02	.32	· 62	έ
₹ .				-82	-12	·42	·74	-04	-34	-64	Ş
3		. วก							.34		,
3	-90	·20	-52								
0 1 2 3 4 5 6 7 8 9 10		·20 ·24 ·26	·52 ·54 ·56	·84 ·86	·14 ·18	·46 ·48	·76 ·78	·06 ·08	·36 ·40	.68 .70	10

	150	151	152	153	154	155	156	157	158	159	
0	45.72	46.02	46-34	46-64	46-94	47-24	47.56	47-86	48-16	48-46	0
	.74	.06	-36	-66	.96	·28	-58	-88	-18	-50	
1 2 3 4 5 6 7 8	·78	.08	·38	-68	47.00	.30	-60	-90	·22	·52	1 2 3 4 5 6 7 8
3	-80	-10	·40	.72	.02	∙32	.62	.94	·24	·5 4	3
4	-82	-12	-44	-74	-04	-34	-66	.96	·26	∙56	4
5	-84	.16	.46	·76	-06	∙38	-68	-98	.28	-60	5
6	-88	-18	·48	.78	-10	-40	·70	48.00	-32	·62	6
7	.90	.20	-52	-82	-12	-42	.72	-04	·34	·6 4	7
8	.92	-24	-54	-84	-14	-44	.76	-06	·36	∙66	8
9	.96	-26	∙56	-86	-18	-48	·78	-08	∙38	∙70	ğ
10	.98	·28	-58	.90	-20	-50	-80	-12	.42	.72	10
11	46.00	∙30	∙62	.92	∙22	∙52	·8 4	-14	· 44	.74	11
	160	161	162	163	164	165	166	167	168	169	
0	48.78	49.08	49-38	49-68	49.98	50-30	50-60	50-90	51-20	51-52	0
1	-80	·10 ·12	· 4 0	·72 ·74	50-02	·32 ·34	-62	-92	·24	·5 4	1
1 2 3 4 5 6 7 8	-82	·12	-44	·7 4	-04	·34	-64	·96	·26	·56	2 3 4 5 6 7 8
3	-84	-16	·46	·76	-06	∙38	-68	.98	∙28	-60	3
4	-88	-18	·48	.78	-10	· 4 0	.70	51.00	-32	-62	4
5	· 9 0	-20	.50	-82	.12	-42	.72	-04	∙34	-64	5
6	.92	.22	·5 4	·8 4	-14	-44	.76	-06	∙36	-66	6
7	.94	.26	∙56	· 8 6	-16	· 4 8	.78	-08	-38	·70	7
8	· 9 8	.28	∙58	-88	· 2 0	∙50	-80	-10	·42	.72	8
9	49.00	-30	-60	.92	.22	∙52	-82	-14	-44	.74	9
10	-02	-32	-64	-94	·24	∙54	-86	-16	·46	.76	10
11	-06	∙36	∙66	· 9 6	∙26	∙58	· 8 8	.18	·48	-80	11
	170	171	172	173	174	175	176	177	178	179	
0	51.82	52-12	52.42	52.74	53.04	53-34	53-64	53-96	54-26	54-56	0
1	·8 4	-14	· 46	.76	.06	-36	.68	.98	·28	∙58	1
2 3 4 5 6 7	-86	-18	· 4 8	.78	-08	.40	·70	54.00	.30	·62	2 3 4 5 6 7 8 9
3	.90	-20	-50	-80	·12	· 4 2		.02	-34	-64	3
4	.92	.22	-52	-84	.14	-44	·74	-06	∙36	.66	- 1
5	.94	.26	∙56	-86	-16	·46	.78	.08	.38	-68	5
6	.98	.28	∙58	-88	.20	.50	.80	.10	· 4 0	.72	6
7	52.00	·30	-60	-92	·22 ·24	·52 ·54	-82	-14		.74	/
8	.02	.32	-64	.94	-24	-54	-86	-16	·46	.76	8
9	-04		-66	.96	.26	.58	-88	.18	·48	-80	. 9
10	.08		-68	.98	-30	.60	.90	.20	-52	-82	10
11	-10	· 4 0	.70	53.02	-32	·62	.92	·24	·54	·84	
	180	181	182	183	184	185	186	187	188	189	
0	54-86	55-18	55· 48	55.78	56-08	56-40	56-70	57.00	57-30	57-60	ó
1	.90	.20	-50	-80	.12	.42	.72		-34	-64	į
2	.92	.22	.52	-84	-14	-44	·74	.06	.36		- 4
3	.94	- 24	∙56	-86	.16	·46	.78	-08	∙38		3
4	.96	-28	.58	·88 ·90	-18	·50 ·52	-80	-10	.40	·72	4
5	55-00	.30	-60	.90	.22	.52	-82	-12	-44	.74	5
2 3 4 5 6 7 8	.02	32	. ∙62	.94	·24 ·26	-54 -56	- 84	• 16	.46	·76	6
7	-04	-34	∙66	.96	∙26	· ·56	.88	.18	·48	·78	7
8	-06	-38	-68	.98	·28	-60 -62	-90	·20 ·22	-50	-82	2 3 4 5 6 7 8 9
9	-10	∙40	.70		.32	62	.92	.22	-54	-84	. 9
10	.12	· 4 2	74	-04	-34	• •64	94	∙ •26	∙56	-86	10
11	·14	·46	·76	-06	-36	-68	.98	.28	-58	-88	

	190	191	192	193	194	195	196	197	198	199			230	231	232	233	234	235	236	237	238	239	
0	57-92	58-22	58-52	58-82			59.74	60-04	60-36	60-66	0	0	70-10	70-42	70-72	71.02	71-32	71-64	71-94	72-24	72.54	72-84	
j	·94	·24	-54	·86	-16		·76 ·80	-08	·38 ·40	∙68 ∙7ე	1	1	-14	-44	-74	-04	·36	.66	·%.	26	·58	-88	
2	·96 58·00	∙28 •30	-58 -60	·88 ·90	·18 ·22		·82	·10 ·12	·42	·74	3	2	·16 ·18	·46 ·48	.76 .80	·08	∙38 •40	-68 -70	.98 72.02	·30 ·32	.60 .62	·90 ·92	
4	-02	-32	.62	-94	·24	-54	-84	·14	.46	.76	4	4	-20	-52	-82	-12	.42	.74	-04	-34	-64	.96	
5	-04	-34	-66	·96	.26	∙56	-88	-18	-48	·78	5	5	.24	.54	-84	·14	.46	.76	-06	.36	-68	·98	
6	-06	.38	-68	.98	.28	-60	.90	·20	∙50	.82	6	6	-26	·56	-86	-18	· 4 8	·78	-08	.40	·70	73.00	
/	-10	·40	·70	59.00	-32			.22	·54 ·56	·84	/	7	·28	·58	90	·20	·50	-80	.12	-42	·72	·02	
0	·12 ·14	·42 ·44	·72 ·76	-04 -06	·34 ·36		·98	·26 ·28	·58	-86 -88	9	8	·30 ·34	·62 ·64	·92 ·94	·22 ·24	.52 ·56	·84 ·86	·14 ·16	·44 ·46	·74 ·78	·06 ·08	
ío	.16	-48	·78	-08	-38			-30	.60	.92	ıó	10	.36	.66	.98	-28	-58	.88	-18	.50	-80	-10	1
ii	-20	-50	-80	.10	•42			-32	·64	·94	ii	iĭ	-38		71.00	-30	.60	.92	.22	·52	-82	·iž	į
	200	201	202	203	204	205	206	207	208	209			240	241	242	243	244	245	246	247	248	249	
0	60-96	61-26	61.58	61.88	62-18	62-48	62-80	63-10	63-40	63.70	0	0	73-16	73.46	73.76	74.06	74-38	74-68	74.98	75.28	75-60	75.90	
ı	-98	-30	-60	-90	·20	∙52	-82	.12	.42	·7 4	1	1	-18	·48	·78	.10	· 4 0	.70	75.00	.32	·62	.92	
2	61.02	.32	-62	.92	-24	-54	-84	-14	.46	·76	2	2	.20	-52	-82	-12	·42	.72	-04	-34	-64	.94	
3	-04 -06	·34 ·36	-64 -68	·96 ·98	·26 ·28	·56 ·58	·86 ·90	·18 ·20	·48 ·50	.78 .80	3	3	·24	-54	·84	-14	·46	.76 .78	.06 .08	·36 ·38	·66 ·70	.98 76:00	
5	-08	-40	-70	62.00	.30	.62	.92	.22	-52	-84	- 3	3	·26 ·28	·56 ·58	·86 ·90	·18 ·20	·48 ·50	-80	-12	·42	.72	·02	
6	.12	.42	·72	-02	-34	-64	.94	-24	-56	-86	6	6	.30	-62	.92	.22	.52	-84	· i4	.44	-74	-06	
7	-14	·44 ·48	·76	-06	.36	-66	.96	·28 ·30	∙58	-88	7	7	-34	-64	-94	-24	·56	-86	-16	.46	.78	-08	
8	·16		·78	-08	•38	·68	63.00		-60	·90	8	8	.36	-66	.96	·28	·58	-88	-18	.50	-80	-10	
9	·20 ·22	·50 ·52	-80 -82	·10 ·14	·42 ·44	·72 ·74	-02 -04	·32 ·36	·62 ·66	·94 ·96	9 10	10	·38 ·40	·68 ·72	74·00 ·02	·30 ·32	·60 ·62	·90 ·94	·22 ·24	·52 ·54	·82 ·84	·12 ·16	
ii	.24	-54	-86	-16	·46	·76	-08	.38	-68	·98	ii	11	·44	.74	·04	·34	-66	.96	-26	-56	-88	-18	i
	210	211	212	213	214	215	216	217	218	219			250	251	252	253	254	255	256	257	258	259	
-	64-02	64-32	64-62	64-92	65-22	65-54	65-84	66-14	66-44	66.76	0	0	76-20	76-50	76-82	77-12	77-42	77.72	78-04	78-34	78-64	78-94	
Ĭ	-04	-34	-64	.96	·26	.56	-86	.16	·48	·78	Ĭ	Ĭ	.22	.54	-84	· 14	.44	.76	.06	-36	-66	-98	
2	-06	.36	-68	.98	.28	.58	-90	.20	·50	-80	2	2	·26	·56	-86	.16		.78	.08	.38	·70		
3	-08	·40	·70	65.00	·30	·62	.92	.22	·52	·84	3	3	·28	-58	.88	·20	·50	.80	-10	.42	·72	·02	
7	·12 ·14	·42 ·44	·72 ·74	.02 .06	·34 ·36	·64 ·66	·94 ·96	·24 ·28	·56 ·58	·86 ·88	7	1	·30 ·32	·60 ·64	.92 .94	·22 ·24	·52 ·54	·82 ·86	·14 ·16	·44 ·46	·74 ·76	-04 -08	
6	.16	.46	·78	-08	-38	-68	66-00	-30	.60	.90	6	6	.36	-66	.96	.26	.58	.88	.18	·48	-80	-10	
7	-18	∙50	-80	-10	· 4 0	·72	-02	.32	-62	.94	7	7	.38	-68	77.00	.30		-90	·20	-52	-82	-12	
8	.22	-52	-82	.12	-44	·74	-04	-34	.66	∙96	8	8	· 4 0	·72	.02	.32			-24	-54	-84	-14	
3	·24 ·26	·54 ·56	·84 ·88	·16 ·18	·46 ·48	·76 ·78	-06	·38 ·40	-68	·98 67·00	9	10	.44	.74 .76	·04 ·06	·34 ·38	·66 ·68	·96 ·98	·26 ·28	·56 ·60	·86 ·90	·18 ·20	
ii	·30	.60	.90	.20	.50	-82	·10 ·12	.42	.70 .72	·04	10 11	11	·46 ·48	.78	.10	.40			-32	·62	.92		i
	220	221	222	223	224	225	226	227	228	229			260	261	262	263	264	265	266	267	268	269	
0	67.06	67-36	67.66	67.98	68-28	68-58	68-88	69-20	69.50	69-80	0	0	79.26	79.56	79.86	80-16	80-46	80.78	81.08	81-38	81.68	82.00	
Ī	-08	-38	·70	68-00	·30	.60	.92	.22	.52	·82	ĭ	Ĭ	.28	∙58	-88	.20	·50	-80	-10	· 4 0	.72	-02	
2	-10	-42	·72	.02	-32	-64	-94	.24	-54	-86	2	2	.30	-60	.92	.22		-82	-14	-44	-74	-04	
3	-14	·44	·74	·04	•36	-66	-96	·26	·58	-88	3	3	.32	-64	.94	·24	-54	-86	-16	·46	.76	-08	
7	·16 ·18	·46 ·50	.76 .80	·10	·38 ·40	∙68 ∙70	·98 69·02	∙30 •32	-60 -62	·90 ·94	4	4 5	·36 ·38	·66 ·68	·96 ·98	·26 ·30	·58 ·60	·88 ·90	·18 ·20	·48 ·52	·80 ·82	·10 ·12	
ć	-22	.52	-82	.12	·44	.74	-04	-34	-64	·96	6	6	·40	.70		-32		.92	-24	.54	-84	-14	
7	·24	-54	-84	·16	·46	·76	-06	-38	-68	·98	7	7	.42	.74	-04	·3 4	-64	-96	·26	·56	-86	-18	
8	·26	.56	-88	-18	·48	·78	.10	· 4 0	·70	70.00	8	8	.46	.76	.06	.36	-66	.98	.28	·58	.90	-20	
9	.28	·60	.90	·20	·50	·82	·12	·42	.72	·04	9	9	·48	·78	.08	·40	·70		·30	.62	.92	.22 .24	, .
10	·32 ·34	·62 ·64	·92 ·94	·22 ·26	·54 ·56	·84 ·86	·14 ·16	·44 ·48	∙76 ∙78	-06 -08	10	10 11	·50 ·54	·80 ·84	·12 ·14	·42 ·44	·72 ·74	.02 .06	·34 ·36	·64 ·66	·94 ·96	· 24 · 28	. !
	.74		77	-20	-30	-00	-10	70	-76	-06			- 7-7	-0-1	-14	***	-,-				- 70	- 20	

	270	271	272	273	274	275	276	277	278	279	
-	82.30	82-60	82.90	83-22	83.52	83-82	84-12	84-44	84:74	85-04	0
İ	.32	-62	-94	:24	·5 4	-84	-16	.46	.76	-06	ĭ
2 3 4	.34	-66	.96	·26	.56	-88	.18	·48	.78	.10	2
3	-38	-68	.98	.28	.60	-90	·20	.50	-82	.12	2 3 4 5 6 7
4	·40	·70	83.00	.32	·62	.92	·22	·54	·84	-14	4
6	·42 ·46	·74 ·76	-04	·34 ·36	·64 ·68	·94 ·98	·26 ·28	·56 ·58	·86 ·88	·16 ·20	5
7	48	.78	-06 -08	·40	.70	84.00	.30	-62	.92	.22	7
8	.50	-80	-12	-42	·72	.02	-34	-64	.94	·24	8
9	·52	-84	-14	-44	-74	.06	-36	-66	-96	·28	9
10	∙56	-86	-16	·46	.78	-08	.38	-68	85.00	-30	10
11	·58	-88	-18	-50	-80	-10	· 4 0	·72	-02	·32	
	280	281	282	283	284	285	286	287	288	289	
	85-34	85.66	85.96	86-26	86.56	86.88	87-18	87-48	87.78	88.08	0
1 2 3 4	-38	-68	.98	.30	-60	.90	·20	·50	·82	-12	1
2	·40	·70	86.00	.32	-62	.92	.22	-54	·84	-14	2 3 4 5 6
3	·42 ·44	·72 ·76	-04 -06	·34 ·36	·64 ·66	·94 ·98	·26 ·28	·56 ·58	∙86	·16	3
7	·48	·78	.08	.38	·70	87.00	·30	.90	·88 ·92	∙20 ∙22	7
5 6	-50	-80	.10	.42	.72	.02	.32	-64	.94	24	6
7	·52	-82	-14	44	.74	04	-36	.66	.96	-26	7
8	-54	-86	-16	-46	·76	-08	.38	.68	.98	.30	8
9	.58	-88	.18	-48	-80	-10	·40	.70	88.02	-32	9
10	-60	.90	.22	-52	-82	-12	-42	.74	.04	-34	10
11	.62	.94	·2 4	-54	-84	∙16	·46	·76	-06	∙36	11
	290	291	292	293	294	295	296	297	298	299	
0	88-40	88.70	89.00	89-30	89.62	89.92	90.22	90.52	90.84	91-14	0
1	88·40 ·42	88·70 ·72	89·00 ·02	89·30 ·34	89·62 ·64	89·92 ·94	90·22 ·24	90·52 ·56	90·84 ·86	91·14 ·16	1
1	88·40 ·42 ·44	88·70 ·72 ·76	89·00 ·02	89·30 ·34 ·36	89·62 ·64 ·66	89·92 ·94 ·96	90·22 ·24 ·28	90·52 ·56 ·58	90·84 ·86	91·14 ·16 ·18	1
1 2 3	88·40 ·42 ·44 ·48	88·70 ·72 ·76 ·78	89·00 ·02 ·06 ·08	89·30 ·34 ·36 ·38	89·62 ·64 ·66 ·70	89·92 ·94 ·96 90·00	90·22 ·24 ·28 ·30	90·52 ·56 ·58 ·60	90·84 ·86 ·88 ·90	91·14 ·16 ·18 ·22	1
1 2 3 4	88·40 ·42 ·44 ·48 ·50	88·70 ·72 ·76 ·78 ·80	89-00 -02 -06 -08 -10	89·30 ·34 ·36 ·38 ·42	89·62 ·64 ·66 ·70 ·72	89·92 ·94 ·96 90·00 ·02	90·22 ·24 ·28 ·30 ·32	90·52 ·56 ·58 ·60 ·62	90·84 ·86 ·88 ·90 ·94	91·14 ·16 ·18 ·22 ·24	1 2 3 4
1 2 3 4 5	88-40 -42 -44 -48 -50 -52	88·70 ·72 ·76 ·78 ·80 ·82	89-00 -02 -06 -08 -10 -14	89·30 ·34 ·36 ·38 ·42 ·44	89·62 ·64 ·66 ·70 ·72 ·74	89·92 ·94 ·96 90·00 ·02 ·04	90·22 ·24 ·28 ·30 ·32 ·36	90·52 ·56 ·58 ·60 ·62 ·66	90·84 ·86 ·88 ·90 ·94 ·96	91·14 ·16 ·18 ·22 ·24 ·26	1 2 3 4 5
1 2 3 4 5	88·40 ·42 ·44 ·48 ·50 ·52 ·54	88·70 ·72 ·76 ·78 ·80 ·82 ·86	89·00 ·02 ·06 ·08 ·10 ·14 ·16	89·30 ·34 ·36 ·38 ·42 ·44	89·62 ·64 ·66 ·70 ·72 ·74 ·76	89·92 ·94 ·96 90·00 ·02 ·04 ·08	90·22 ·24 ·28 ·30 ·32 ·36 ·38	90·52 ·56 ·58 ·60 ·62 ·66 ·68	90·84 ·86 ·88 ·90 ·94 ·96 ·98	91·14 ·16 ·18 ·22 ·24 ·26 ·30	1 2 3 4 5
1 2 3 4 5 6 7	88-40 -42 -44 -48 -50 -52 -54	88·70 ·72 ·76 ·78 ·80 ·82 ·86 ·88	89·00 ·02 ·06 ·08 ·10 ·14 ·16 ·18	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80	89·92 ·94 ·96 90·00 ·02 ·04 ·08 ·10	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70	90·84 ·86 ·88 ·90 ·94 ·96 ·98 91·02	91·14 ·16 ·18 ·22 ·24 ·26 ·30 ·32	1 2 3 4 5 6 7
1 2 3 4 5 6 7 8	88-40 -42 -44 -48 -50 -52 -54 -58 -60	88·70 ·72 ·76 ·78 ·80 ·82 ·86	89·00 ·02 ·06 ·08 ·10 ·14 ·16	89-30 -34 -36 -38 -42 -44 -46 -48 -52	89·62 ·64 ·66 ·70 ·72 ·74 ·76	89·92 ·94 ·96 90·00 ·02 ·04 ·08	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42	90·52 ·56 ·58 ·60 ·62 ·66 ·68	90·84 ·86 ·88 ·90 ·94 ·96 ·98	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36	1 2 3 4 5
1 2 3 4 5 6 7 8	88-40 -42 -44 -48 -50 -52 -54	88·70 ·72 ·76 ·78 ·80 ·82 ·86 ·88 ·90 ·92 ·96	89·00 ·02 ·06 ·08 ·10 ·14 ·16 ·18 ·20	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48 ·52 ·54 ·56	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80 ·82	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46 ·48	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74	90·84 -86 -88 -90 -94 -96 -98 91·02 -04 -06 -08	91·14 ·16 ·18 ·22 ·24 ·26 ·30 ·32 ·34 ·36 ·40	1 2 3 4 5 6 7 8
1 2 3 4 5 6 7 8	88-40 -42 -44 -48 -50 -52 -54 -58 -60	88·70 ·72 ·76 ·78 ·80 ·82 ·86 ·88 ·90 ·92	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24	89-30 -34 -36 -38 -42 -44 -46 -48 -52	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80 ·82 ·84	89-92 -94 -96 90-00 -02 -04 -08 -10 -12	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76	90·84 ·86 ·88 ·90 ·94 ·96 ·98 91·02 ·04 ·06	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36	1 2 3 4 5 6 7 8 9
1 2 3 4 5 6 7 8 9	88-40 -42 -44 -48 -50 -52 -54 -58 -60 -62	88·70 ·72 ·76 ·78 ·80 ·82 ·86 ·88 ·90 ·92 ·96	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48 ·52 ·54 ·56	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80 ·82 ·84 ·86 ·90	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46 ·48	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76 ·78	90·84 -86 -88 -90 -94 -96 -98 91·02 -04 -06 -08	91·14 ·16 ·18 ·22 ·24 ·26 ·30 ·32 ·34 ·36 ·40	1 2 3 4 5 6 7 8 9
1 2 3 4 5 6 7 8 9 10 11	88-40 -42 -44 -48 -50 -52 -54 -58 -60 -62 -64 -68 300	88·70 ·72 ·76 ·78 ·80 ·82 ·86 ·88 ·90 ·92 ·96 ·98 301 91·74	89.00 .02 .06 .08 .10 .14 .16 .18 .20 .24 .26 .28 302	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48 ·52 ·54 ·56 ·58 303	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80 ·82 ·84 ·86 ·90 304	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46 ·48 ·50 306	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76 ·78 ·80 307	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11	88-40 -42 -44 -48 -50 -52 -54 -58 -60 -62 -64 -68 300	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78	89.00 .02 .06 .08 .10 .14 .16 .18 .20 .24 .26 .28 302	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48 ·52 ·54 ·56 ·58 303 92·36 ·38	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80 ·82 ·84 ·90 304	89.92 .94 .96 90.00 .02 .04 .08 .10 .12 .14 .18 .20 .305	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46 ·48 ·50 306	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76 ·78 ·80 307 93·58 ·60	90·84 ·86 ·88 ·90 ·94 ·96 ·98 91·02 ·04 ·06 ·08 ·12 308	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309 94-18 -22	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11	88-40 -42 -44 -48 -50 -52 -54 -60 -62 -64 -68 300 91-44 -46 -50	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80	89.00 .02 .06 .08 .10 .14 .16 .18 .20 .24 .26 .28 302	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48 ·52 ·54 ·56 ·58 303 92·36 ·38 ·40	89·62 ·64 ·66 ·70 ·72 ·74 ·76 ·80 ·82 ·84 ·90 304 92·66 ·68 ·72	89.92 .94 .96 90.00 .02 .04 .08 .10 .12 .14 .18 .20 305	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46 ·48 ·50 306	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·74 ·78 ·80 307 93·58 ·60 ·62	90·84 ·86 ·88 ·90 ·94 ·96 ·98 91·02 ·04 ·06 ·08 ·12 308	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309 94-18 -22 -24	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11	88:40 -42 -44 -48 -50 -52 -54 -68 -300 -91:44 -46 -50	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -80 -82	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 -20 -28 -302 -10 -12	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·48 ·52 ·54 ·56 ·58 303 92·36 ·38 ·40 ·44 ·44 ·44 ·46 ·46 ·58 ·58 ·58 ·58 ·58 ·58 ·58 ·58	89.62 .64 .66 .70 .72 .74 .76 .80 .82 .84 .86 .90 304 92.66 .68 .72	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 305 92-96 93-00 -02 -04	90·22 ·24 ·28 ·30 ·32 ·36 ·38 ·40 ·42 ·46 ·48 ·50 306 93·28 ·30 ·32 ·32 ·34	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76 ·78 ·80 307 93·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76 ·78 ·80 ·80 ·80 ·80 ·80 ·80 ·80 ·8	90·84 ·86 ·88 ·90 ·94 ·96 ·04 ·06 ·08 ·12 308 93·88 ·90 ·94 ·96 ·98 ·90 ·94 ·96 ·98 ·91 ·02 ·04 ·06 ·08 ·19 ·19 ·19 ·19 ·19 ·19 ·19 ·19	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309 94-18 -22 -24 -26	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11 	88:40 -42 -44 -48 -50 -52 -58 -60 -62 -64 -68 300 91:44 -46 -50 -52 -54	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -82 -84	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 302 92-06 -08 -10 -116	89·30 ·34 ·36 ·38 ·42 ·44 ·46 ·52 ·54 ·56 ·58 303 92·36 ·40 ·44 ·46	89.62 .64 .66 .70 .72 .74 .76 .80 .82 .84 .86 .90 304 92.66 .68 .72 .74	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 	90-22 -24 -28 -30 -32 -36 -38 -40 -42 -46 -48 -50 -306 -32 -30 -32 -34 -38	90·52 ·56 ·58 ·60 ·62 ·66 ·68 ·70 ·74 ·76 ·78 ·80 307 93·58 ·60 ·62 ·66 ·68	90·84 ·86 ·88 ·90 ·94 ·96 ·98 91·04 ·06 ·08 ·12 308 93·88 ·90 ·94 ·96	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 -22 -24 -22 -24 -28	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11 	88-40 -42 -44 -48 -50 -52 -54 -68 -60 -61 -68 -50 -52 -54 -56	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -82 -84	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 -302 -92-06 -08 -10 -12 -16 -18	89·30 -34 -36 -38 -42 -44 -46 -48 -52 -54 -56 -58 303 92·36 -40 -44 -46 -48	89·62 -64 -66 -70 -72 -74 -76 -80 -82 -84 -86 -90 304 92·66 -68 -72 -74 -76 -78	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 -20 -305 -92-96 93-00 -02 -04 -06 -10	90-22 -24 -28 -30 -32 -36 -38 -40 -42 -46 -48 -50 -306 -32 -34 -38 -40	90·52 -56 -58 -60 -62 -66 -70 -74 -76 -78 -80 -80 -62 -66 -68 -70	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308 93-88 -90 -94 -96 -98 94-00	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -40 -42 309 94-18 -22 -24 -26 -28 -32	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11 	88-40 -42 -44 -48 -50 -52 -64 -68 300 91-44 -46 -50 -52 -54 -66	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -80 -82 -84 -88 -90	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 -20 -10 -12 -16 -18 -20 -12 -16 -18 -20 -24 -26 -28	89-30 -34 -36 -38 -42 -44 -46 -48 -52 -54 -56 -58 303 92-36 -40 -44 -46 -48 -50	89-62 -64 -66 -70 -72 -74 -76 -80 -82 -84 -90 304 92-66 -68 -72 -74 -76 -78 -78 -78 -78 -78 -78 -78 -78 -78 -78	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 -20 -29-96 93-00 -02 -04 -06 -10 -12	90-22 -24 -28 -30 -32 -36 -38 -40 -42 -46 -48 -50 -32 -32 -34 -38 -40 -42	90-52 -56 -58 -60 -62 -68 -70 -74 -76 -80 307 93-58 -60 -62 -66 -68 -70 -72	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308 93-88 -90 -94 -96 -98 94-00	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 -30 94-18 -22 -24 -26 -28 -33 -34	1 2 3 4 5 6 7 8 9 10 11
1 2 3 4 5 6 7 8 9 10 11 	88:40 -42 -44 -48 -50 -52 -54 -68 -300 -91:44 -46 -50 -52 -54 -56 -60 -62	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -82 -84 -88 -90 -92	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 302 92-06 -08 -10 -12 -16 -18 -20 -24	89-30 -34 -36 -38 -42 -44 -46 -48 -52 -54 -56 -58 303 92-36 -38 -40 -44 -46 -48 -50 -54	89-62 -64 -66 -70 -72 -74 -80 -82 -84 -90 304 92-66 -68 -72 -74 -76 -78 -88 -88 -88 -88 -88 -88 -88 -72 -74 -76 -88 -78 -78 -88 -88 -88 -88 -88 -88 -88	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 -20 -305 -92-96 93-00 -04 -06 -10 -12 -14	90-22 -24 -28 -30 -32 -36 -40 -42 -46 -48 -50 306 93-28 -30 -32 -34 -40 -42 -44	90-52 -56 -58 -60 -62 -68 -70 -74 -78 -80 307 93-58 -60 -66 -68 -70 -72 -76	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308 93-88 -90 -94 -96 -98 94-00 -06	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309 94-18 -22 -24 -26 -28 -32 -34 -36	1 2 3 4 5 6 6 7 8 9 10 11 2 3 4 5 6 6 7 8
1 2 3 4 5 6 7 8 9 10 11 	88-40 -42 -44 -48 -50 -52 -64 -68 300 91-44 -50 -52 -54 -56 -60 -62 -64	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -82 -84 -84 -89 -90 -92 -92 -98	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 302 92-06 -08 -10 -12 -16 -18 -20 -24 -26	89-30 -34 -36 -38 -42 -44 -46 -48 -52 -54 -56 -58 303 92-36 -48 -40 -44 -46 -48 -50 -54 -50 -54 -55	89-62 -64 -66 -70 -72 -74 -80 -82 -84 -86 -90 304 92-66 -68 -72 -74 -76 -82 -82 -84 -86	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 305 92-96 93-00 -02 -04 -06 -10 -12 -14 -16	90-22 -24 -28 -30 -32 -36 -38 -40 -42 -46 -48 -50 306 93-28 -30 -32 -34 -38 -40 -42 -44 -48	90-52 -56 -58 -60 -62 -66 -68 -70 -74 -76 -78 -80 -80 -62 -66 -68 -70 -72 -72 -77 -78	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308 93-88 -90 -94 -98 94-00 -04 -06 -08	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309 94-18 -22 -24 -26 -28 -32 -34 -36 -38 -38 -38 -38 -38 -38 -38 -38 -38 -38	1 2 3 4 5 6 6 7 8 9 10 11 2 3 4 5 6 6 7 8
1 2 3 4 5 6 7 8 9 10 11 	88:40 -42 -44 -48 -50 -52 -54 -68 -300 -91:44 -46 -50 -52 -54 -56 -60 -62	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -82 -84 -84 -89 -90 -92 -92 -98	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 302 92-06 -08 -10 -12 -16 -18 -20 -24	89-30 -34 -36 -38 -42 -44 -46 -48 -52 -56 -58 303 92-36 -40 -44 -46 -48 -50 -54 -56 -58	89-62 -64 -66 -70 -72 -74 -76 -80 -82 -84 -90 304 92-66 -68 -72 -74 -76 -78 -82 -84 -86 -90 -92	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 -20 -22 -22	90-22 -24 -28 -30 -32 -36 -38 -40 -42 -46 -48 -50 -32 -34 -38 -40 -42 -44 -44 -48 -50	90-52 -56 -58 -60 -62 -66 -68 -70 -74 -76 -78 -80 -80 -62 -66 -68 -70 -72 -76 -78 -80 -62 -66 -68 -70 -72 -76 -78 -80 -80 -80 -80 -80 -80 -80 -80 -80 -8	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308 93-88 -90 -94 -96 -98 94-00 -06 -08 -11	91-14 -16 -18 -22 -24 -30 -32 -34 -36 -40 -42 -309 -94-18 -22 -24 -26 -28 -32 -34 -36 -38 -38 -42 -34 -36 -38 -34 -36 -36 -36 -36 -36 -36 -36 -36 -36 -36	1 2 3 4 5 6 7 8 9 10 1 2 3 4 5 6 7 8 9 10
1 2 3 4 5 6 7 8 9 10 11 	88-40 -42 -44 -48 -50 -54 -58 -60 -62 -64 -68 300 91-44 -46 -50 -52 -54 -60 -62 -64 -68	88-70 -72 -76 -78 -80 -82 -86 -88 -90 -92 -96 -98 301 91-74 -78 -80 -82 -84 -88 -90 -92	89-00 -02 -06 -08 -10 -14 -16 -18 -20 -24 -26 -28 -20 -10 -12 -16 -18 -20 -24 -26 -28	89-30 -34 -36 -38 -42 -44 -46 -48 -52 -54 -56 -58 303 92-36 -40 -44 -48 -50 -56	89-62 -64 -66 -70 -72 -74 -80 -82 -84 -86 -90 304 92-66 -68 -72 -74 -76 -82 -82 -84 -86	89-92 -94 -96 90-00 -02 -04 -08 -10 -12 -14 -18 -20 305 92-96 93-00 -02 -04 -06 -10 -12 -14 -16	90-22 -24 -28 -30 -32 -36 -38 -40 -42 -46 -48 -50 306 93-28 -30 -32 -34 -38 -40 -42 -44 -48	90-52 -56 -58 -60 -62 -66 -68 -70 -74 -76 -78 -80 -80 -62 -66 -68 -70 -72 -72 -77 -78	90-84 -86 -88 -90 -94 -96 -98 91-02 -04 -06 -08 -12 308 93-88 -90 -94 -96 -98 94-00 -04 -06 -08	91-14 -16 -18 -22 -24 -26 -30 -32 -34 -36 -40 -42 309 94-18 -22 -24 -26 -28 -32 -34 -36 -38 -38 -38 -38 -38 -38 -38 -38 -38 -38	1 2 3 4 5 6 7 8 9 10 11 2 3 4 5 6 7 8 9

	310	311	312	313	314	315	316	317	318	319	
0	94-50	94-80	95-10	95.40	95.70	96-02	96-32	96-62	96-92	97-24	0
1	.52	-82	-12	-44	.74	-04	-34	-64	∙96	·26	1
2 3 4	.54	-84	-16	-46	.76	.06	∙38	∙68	-98	.28	2 3 4 5 6
3	-56	-88	-18	·48	.78	-10	· 4 0	.70	97.00	.32	3
4	.60	.90	-20	-50	-82	·12	-42	-72	-04	∙34	4
5 6	.62	.92	·22	-54	-84	-14	-44	.76	-06	∙36	5
5	-64	-94	.26	·56	-86	-16	·48	.78	.08	∙38	6
7	-66	· 9 8	.28	-58	-88	-20	∙50	-80	-10	-42	7
3	.70	95.00	-30	-60	.92	.22	-52	-82	-14	-44	8
•	.72	-02	.32	-64	.94	·24	-54	-86	-16	· 46	9
0	.74	-04	-36	-66	.96	·26	.58	.88	-18	48	10
1	·78	.08	·38	·68	.98	-30	-60	·90	·20	52	- 11
	320	321	322	323	324	325	326	327	328	329	
)	97.54	97-84	98-14	98-46	98.76	99.06	99.36	99.68		100-28	0
1	·56	.86	.18	·48	·78	-08	-40		100.00	-32	l l
2 3 4	-58	.90	·20	·50	-80	·12	-42	·72	02	∙34	2
	-62	.92	.22	-54	-84	-14	-44	.74	.06	-36	3
}	64	.94	-24	.56	-86	-16	46	.78	.08	∙38	2 3 4 5 6
; ; ;	·66	-98	.28	∙58	-88	-18	·50	∙80	-10	· 4 0	5
1	.70	98-00	.30	-60	.92	·22	-52	.82	·12	·44	6
'	.72	.02	∙32	-64	.94	·24	∙54	-86	-16	· 4 6	7
	-74	-04	∙36	-66	∙96	-26	-58	-88	-18	·48	8
)	.76	.08	∙38	∙68	.98	-30	-60	.90	·20	-52	9
0	-80	-10	·40	.70	99.02	.32	-62	.92	.24	-54	10
ı	.82	·12	· 42	·74	.04	·3 4	-64	.96	-26	-56	11
	330	331	332	333	334	335	336	337	338	339	
)	100-58	100-90		101-50							0
!	-62	.92	.22	-52	·84	-14	44	·74	-06	-36	Ţ
<u>.</u>	-64	-94	.24	·56	-86	·16	46	·78	-08	-38	2
	-66	96	·28	·58	-88	·18	·50	-80	.10	-40	3
		101.00	.30	-60	-90	-22	-52	-82	-12	-44	4
	-72	.02	∙32	62	.94	·24	-54	-84	∙16	· 46	5
	.74	.04	.34	-66	-96	-26	-56	.88	-18	48	2 3 4 5 6 7
	.76	-06	-38	-68	.98	-28	-60	.90	-20	∙50	7
	·78	-10	· 4 0		102-00	∙32	-62	.92	·22	∙54	8.
)	.82	-12	·- 4 2	·72	-04	.34	-64	∙94	.26	-56	9
0	-84	·14	· 4 6	.76	-06	∙36	-66	∙98	-28	-58	10
!	· 8 6	.18	· 4 8	·78	-08	· 4 0	.70	103-00	-30	-60	
	340	341	342	343	344	345	346	347	348	349	
	103-64	103-94	104-24	104-54	104-86	105-16	105.46	105.76	106-08	106-38	0
1	103·64 ·66	103·94 ·96	104·24 ·26	104·54 ·58	104·86 ·88	105·16 ·18	105·46 ·48	105·76 ·80	106·08 ·10	106·38 ·40	1
1	103·64 ·66 ·68	103·94 ·96 104·00	104·24 ·26 ·30	104·54 ·58 ·60	104·86 ·88 ·90	105·16 ·18 ·20	105·46 ·48 ·52	105·76 ·80 ·82	106·08 ·10 ·12	106·38 ·40 ·42	1
1	103·64 ·66 ·68 ·72	103·94 ·96 104·00 ·02	104·24 ·26 ·30 ·32	104·54 ·58 ·60 ·62	104·86 ·88 ·90 ·94	105·16 ·18 ·20 ·24	105·46 ·48 ·52 ·54	105·76 ·80 ·82 ·84	106·08 ·10 ·12 ·14	106·38 ·40 ·42 ·46	1
1	103-64 -66 -68 -72 -74	103·94 ·96 104·00 ·02 ·04	104·24 ·26 ·30 ·32 ·34	104·54 ·58 ·60 ·62 ·66	104-86 -88 -90 -94 -96	105·16 ·18 ·20 ·24 •26	105·46 ·48 ·52 ·54 ·56	105·76 ·80 ·82 ·84 ·86	106·08 ·10 ·12 ·14 ·18	106-38 -40 -42 -46 -48	1
	103-64 -66 -68 -72 -74 -76	103·94 ·96 104·00 ·02 ·04 ·06	104·24 ·26 ·30 ·32 ·34 ·38	104-54 -58 -60 -62 -66 -68	104-86 -88 -90 -94 -96 -98	105·16 ·18 ·20 ·24 ·26 ·28	105·46 ·48 ·52 ·54 ·56 ·60	105 76 80 82 84 86 90	106·08 ·10 ·12 ·14 ·18 ·20	106·38 ·40 ·42 ·46 ·48 ·50	1
	103·64 ·66 ·68 ·72 ·74 ·76 ·78	103·94 ·96 104·00 ·02 ·04 ·06 •10	104·24 ·26 ·30 ·32 ·34 ·38 ·40	104-54 -58 -60 -62 -66 -68 -70	104-86 -88 -90 -94 -96 -98 105-00	105·16 ·18 ·20 ·24 ·26 ·28 ·32	105·46 ·48 ·52 ·54 ·56 ·60 ·62	80 -82 -84 -86 -90 -92	106-08 -10 -12 -14 -18 -20 -22	106·38 ·40 ·42 ·46 ·48 ·50 ·54	1 2 3 4 5 6
	103-64 -66 -68 -72 -74 -76 -78 -82	103-94 -96 104-00 -02 -04 -06 -10	104·24 ·26 ·30 ·32 ·34 ·38 ·40 ·42	104·54 -58 -60 -62 -66 -68 -70 -72	104-86 -88 -90 -94 -96 -98 105-00 -04	105·16 ·18 ·20 ·24 ·26 ·28 ·32 ·34	-54 -52 -54 -56 -60 -62 -64	80 82 84 86 90 92	106·08 ·10 ·12 ·14 ·18 ·20 ·22 ·26	106-38 -40 -42 -46 -48 -50 -54 -56	1 2 3 4 5 6
	103-64 -66 -68 -72 -74 -76 -78 -82 -84	103-94 -96 104-00 -02 -04 -06 +10 -12	104·24 ·26 ·30 ·32 ·34 ·38 ·40 ·42 ·44	104·54 -58 -60 -62 -66 -68 -70 -72 -76	104-86 -88 -90 -94 -96 -98 105-00 -04 -06	105·16 ·18 ·20 ·24 ·26 ·28 ·32 ·34 ·36	105-46 -48 -52 -54 -56 -60 -62 -64	.80 .82 .84 .86 .90 .92 .94	106·08 ·10 ·12 ·14 ·18 ·20 ·22 ·26 ·28	106-38 -40 -42 -46 -48 -50 -54 -56 -58	1 2 3 4 5 6 7 8
1 1 1 5 5 7	103-64 -66 -68 -72 -74 -76 -78 -82 -84	103·94 ·96 104·00 ·02 ·04 ·06 •10 ·12 ·14 ·16	104·24 ·26 ·30 ·32 ·34 ·38 ·40 ·42 ·44 ·48	104-54 -58 -60 -62 -66 -68 -70 -72 -76 -78	104-86 -88 -90 -94 -96 -98 105-00 -04 -06 -08	105-16 -18 -20 -24 -26 -28 -32 -34 -36 -38	105-46 -48 -52 -54 -56 -60 -62 -64 -66	105-76 -80 -82 -84 -86 -90 -92 -94 -98 106-00	106·08 ·10 ·12 ·14 ·18 ·20 ·22 ·26 ·28 ·30	106-38 -40 -42 -46 -48 -50 -54 -56 -58 -60	1 2 3 4 5 6 7 8
	103-64 -66 -68 -72 -74 -76 -78 -82 -84	103-94 -96 104-00 -02 -04 -06 +10 -12	104·24 ·26 ·30 ·32 ·34 ·38 ·40 ·42 ·44	104·54 -58 -60 -62 -66 -68 -70 -72 -76	104-86 -88 -90 -94 -96 -98 105-00 -04 -06	105·16 ·18 ·20 ·24 ·26 ·28 ·32 ·34 ·36	105-46 -48 -52 -54 -56 -60 -62 -64	.80 .82 .84 .86 .90 .92 .94	106·08 ·10 ·12 ·14 ·18 ·20 ·22 ·26 ·28	106-38 -40 -42 -46 -48 -50 -54 -56 -58	1 2 3 4 5 6 7 8

By Order of the Secretary of the Army:

Official:

PAUL T. SMITH
Major General, United States Army
The Adjutant General

Official:

JAMES J. SHEPARD
Colonel, United States Air Force
Director of Administration

Distribution:

Active Army:

To be distributed in accordance with DA Form 12-34B, (qty rqr block no. 93) requirements for TM 5-800: Engineering and Design for Real Property Facilities.

Air Force: F

FRED C. WEYAND General, United States Army Chief of Staff

A. R. MARSCHALL Rear Admiral, CEC, United States Army Commander, Naval Facilities Command

DAVID C. JONES General, United States Air Force Chief of Staff

☆U.S. GOVERNMENT PRINTING OFFICE: 1975 O-597-261



Navy: Distribution: (1 copy unless otherwise specified)

SNDL:		
27A (SUPPFORANTARCTICA only)	FE4 (Edzell, Galeta Island, Homestead, Winter	FKN1 (5 copies each)
39B	Harbor, Sabana Seca, Sonoma,	FKN2
40A (BAHRAIN only)	Todendorf only)	FKN3
A6	FF1 (Washington only)	FKN5
B5	FF4	FKN10
C4F6	FF6	FKP1A
C4F9 (Annapolis, Port Hueneme only)	FF19 (Brooklyn, Canal Zone, Long Beach, New	FKP1B
C4F36	Orleans, Seattle only)	FKP1E
E3A (Washington only)	FG2 (Adak, Balboa, Cheltenham, Diego Gracia,	FKP1J
FA6 (Bermuda, Brunswick, Cecil Field, Key	Norfolk, Harold Holt, Londonderry,	FKP4C
West, Jacksonville, Virginia Beach only)	Morocco, Nea Makri, Stockton, Ponce,	FKR1A
FA7 (Argentia, Guantanamo, Keflavik, Mayport,	Wahiawa only)	FKR3G
Roosevelt Roads only)	FG5 (East Machias only)	FKR3A
FA10	FG11	FKR3H
FA18	FH3 (Beaufort only)	FKR4B
FA23 (Antigua, Barbados, Brawdy, Buxton,	FH25 (Philadelphia, Portmouth, Virginia, Camp	FR3
Eleuthera, Lewes, Nantucket, Turks	Lejuene, Oakland, Newport, Great Lakes,	FR4
Island only)	Long Beach only)	FT6
FA25	FH6 (Bethesda only)	FT19 (San Diego only)
FB6	FH8 (Cairo only)	FT22 (Virginia Beach only)
FB7 (Alameda, Barbers Point, Fallon, Lemoore,	FKA6A1	FT31 (Bainbridge, Orlando, San Diego only)
Oak Harbor, Miramar, North Island,	FKA6A2	FT37
Moffet Field only)	FKA6A3A	FT55
FB10 (Adak, Midway, San Francisco only)	FKA6A3B	FT69
FB21	FKA6A9	FT73
FB26	FB31 (Oahu onlt)	FKR5
FB34 (Okinawa, Sasebo only)	FKA6A10	FT28
FB36 (Big Sur, Coos Head, Ferndale, Pacific	FKA6A11	V16 (MCB Camp Lejeune, Camp Pendleton,
Beach only)	FKA6A15	Twentynine Palms, Smedley Butler only)
FC3 (London only)	FKP7	V5 (MCAS Cherry Point, Beaufort, El Toro, Yuma,
FC4 (Naples, Sigonella only)	FKP12	Kaneohe Bay, Iwakuni only)
FC5	FKM8	V8 (MCRD Parris Island only)
FC7	FKM9 (Oakland only)	V9 (MCSC Albany, Barstow only)
FC12	FKM13	V12 (MCDEC Quantico only)
FE2	FKM15	BUPERS 7211 (300 copies under separate cover)

DEPARTMENT OF THE ARMY
US ARMY AG PUBLICATIONS CENTER
1655 WOODSON ROAD
ST. LOUIS, MISSOURI 631114
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID DEPARTMENT OF THE ARMY DOD 314



