



As per
JNTU-Kakinada
Syllabus regulation
2013

Computer Programming

First Edition

ABOUT THE AUTHOR

E Balagurusamy, former Vice Chancellor, Anna University, Chennai, is currently Chairman, EBG Foundation, Bangalore. He is a teacher, trainer, and consultant in the fields of Information Technology and Management and Member, Union Public Service Commission (UPSC), New Delhi.

He holds an ME (Hons) in Electrical Engineering and PhD in Systems Engineering from the Indian Institute of Technology, Roorkee. His areas of interest include Object-Oriented Software Engineering, Electronic Business, Technology Management, Business Process Re-engineering, and Total Quality Management.

A prolific writer, he has authored a large number of research papers and several books. His best-selling books, among others, include

- *Fundamentals of Computers*
- *Computing Fundamentals and C Programming*
- *Programming in ANSI C, 5/e*
- *Programming in Java, 4/e*
- *Object Oriented Programming with C++, 5/e*
- *Programming in BASIC, 3/e*
- *Programming in C#, 3/e*
- *Numerical Methods*
- *Reliability Engineering*

A recipient of numerous honours and awards, he has been listed in the *Directory of Who's Who of Intellectuals* and in the *Directory of Distinguished Leaders in Education*.



As per
JNTU-Kakinada
Syllabus regulation
2013

Computer Programming

First Edition

E Balagurusamy

*Founder
EBG Foundation
Coimbatore*



McGraw Hill Education (India) Private Limited

NEW DELHI

McGraw Hill Education Offices

New Delhi New York St Louis San Francisco Auckland Bogotá Caracas
Kuala Lumpur Lisbon London Madrid Mexico City Milan Montreal
San Juan Santiago Singapore Sydney Tokyo Toronto



McGraw Hill Education (India) Private Limited

Published by McGraw Hill Education (India) Private Limited
P-24, Green Park Extension, New Delhi 110 016

Computer Programming, 1e

Copyright © 2014, by McGraw Hill Education (India) Private Limited.

No part of this publication may be reproduced or distributed in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise or stored in a database or retrieval system without the prior written permission of the publishers. The program listing (if any) may be entered, stored and executed in a computer system, but they may not be reproduced for publication.

This edition can be exported from India only by the publishers,
McGraw Hill Education (India) Private Limited.

ISBN (13): 978-93-5134-294-6

ISBN (10): 93-5134-294-8

Vice President and Managing Director: *Ajay Shukla*

Head—Higher Education Publishing and Marketing: *Vibha Mahajan*

Publishing Manager (SEM & Tech. Ed.): *Shalini Jha*

Editorial Executive—Acquisitions: *S. Vamsi Deepak*

Manager—Production Systems: *Satinder S Baveja*

Assistant Manager—Editorial Services: *Sohini Mukherjee*

Senior Production Executive: *Suhaib Ali*

Assistant General Manager—Higher Education (Marketing): *Vijay Sarathi*

Senior Product Specialist: *Tina Jajoriya*

Senior Graphic Designer—Cover: *Meenu Raghav*

General Manager—Production: *Rajender P Ghansela*

Production Manager—*Reji Kumar*

Information contained in this work has been obtained by McGraw Hill Education (India), from sources believed to be reliable. However, neither McGraw Hill Education (India) nor its authors guarantee the accuracy or completeness of any information published herein, and neither McGraw Hill Education (India) nor its authors shall be responsible for any errors, omissions, or damages arising out of use of this information. This work is published with the understanding that McGraw Hill Education (India) and its authors are supplying information but are not attempting to render engineering or other professional services. If such services are required, the assistance of an appropriate professional should be sought.

Typeset at Text-o-Graphics, B-1/56, Aravali Apartment, Sector-34, Noida 201 301, and printed at

Cover Printer:

CONTENTS

Preface	ix
Roadmap to the Syllabus	xi
Unit I Introduction to Computers, Problem Solving and Basic of C	1.1
Introduction to Computers and Problem Solving	1.1
1.1 Introduction	1.1
1.2 Computer Systems (Hardware & Software Concepts)	1.2
1.3 Programming Languages (Computer Languages)	1.11
1.4 Programming Environment	1.14
1.5 Creating and Running Programs	1.15
1.6 Software Development Method (Program Development Steps)	1.21
1.7 Applying Software Development Method	1.25
1.8 Problem Solving	1.26
1.9 Algorithms	1.26
1.10 Flowcharts	1.29
1.11 Pseudocodes	1.37
1.12 Problem-Solving Examples	1.40
Basics of C	1.45
1.13 History of C	1.45
1.14 Importance of C	1.46
1.15 Sample Program 1: Printing a Message	1.47
1.16 Sample Program 2: Adding Two Numbers	1.49
1.17 Sample Program 3: Interest Calculation	1.51
1.18 Sample Program 4: Use of Subroutines	1.52
1.19 Sample Program 5: Use of Math Functions	1.53
1.20 Basic Structure of C Programs	1.54
1.21 Programming Style	1.55
1.22 Program Development Steps	1.56
1.23 Unix System	1.57
1.24 MS-DOS System	1.58
1.25 Introduction to Constants, Variables, and Data Types	1.59
1.26 Character Set	1.59
1.27 C Tokens	1.60
1.28 Keywords and Identifiers	1.61
1.29 Constants	1.62
1.30 Variables	1.65
1.31 Data Types	1.66
1.32 Declaration of Variables	1.69
1.33 Declaration of Storage Class	1.72
1.34 Assigning Values to Variables	1.73
1.35 Defining Symbolic Constants	1.77
1.36 Declaring a Variable as Constant	1.79
1.37 Declaring a Variable as Volatile	1.79

1.38	Overflow and Underflow of Data	1.79
1.39	Introduction to Managing Input and Output Operations	1.80
1.40	Reading a Character	1.80
1.41	Writing a Character	1.83
1.42	Formatted Input	1.84
1.43	Formatted Output	1.92
1.44	Introduction to Operators and Expressions	1.99
1.45	Arithmetic Operators	1.99
1.46	Relational Operators	1.101
1.47	Logical Operators	1.102
1.48	Assignment Operators	1.103
1.49	Increment and Decrement Operators	1.105
1.50	Conditional Operator	1.105
1.51	Bitwise Operators	1.106
1.52	Special Operators	1.106
1.53	Arithmetic Expressions	1.108
1.54	Evaluation of Expressions	1.108
1.55	Precedence of Arithmetic Operators	1.109
1.56	Some Computational Problems	1.111
1.57	Type Conversions in Expressions	1.112
1.58	Operator Precedence and Associativity	1.115
1.59	Mathematical Functions	1.116
Unit 2	Selection and Decision Making	2.1
2.1	Introduction	2.1
2.2	Decision Making with if Statement	2.1
2.3	Simple if Statement	2.2
2.4	The if.....else Statement	2.5
2.5	Nesting of if....else Statements	2.7
2.6	The else if Ladder	2.9
2.7	The Switch Statement	2.12
2.8	The ? : Operator	2.15
2.9	The goto Statement	2.17
Unit 3	Arrays	3.1
3.1	Introduction	3.1
3.2	One-Dimensional Arrays	3.2
3.3	Declaration of One-Dimensional Arrays	3.3
3.4	Initialization of One-Dimensional Arrays	3.5
3.5	Two-Dimensional Arrays	3.14
3.6	Initializing Two-Dimensional Arrays	3.18
3.7	Multi-Dimensional Arrays	3.21
3.8	Dynamic Arrays	3.22
3.9	More about Arrays	3.22
Unit 4	Strings and Iteration	4.1
4.1	Introduction	4.1
4.2	Declaring and Initializing String Variables	4.1

4.3	Reading Strings from Terminal	4.3
4.4	Writing Strings to Screen	4.7
4.5	Arithmetic Operations on Characters	4.11
4.6	Putting Strings Together	4.12
4.7	Comparison of Two Strings	4.13
4.8	String-Handling Functions	4.14
4.9	Table of Strings	4.19
4.10	Other Features of Strings	4.20
4.11	Decision Making and Looping	4.20
4.12	The while Statement	4.22
4.13	The do Statement	4.24
4.14	The for Statement	4.26
4.15	Jumps in Loops	4.33
Unit 5	Functions—Modular Programming	5.1
5.1	Introduction	5.1
5.2	Need for User-Defined Functions	5.1
5.3	A Multi-Function Program	5.2
5.4	Elements of User-Defined Functions	5.4
5.5	Definition of Functions	5.4
5.6	Return Values and their Types	5.6
5.7	Function Calls	5.7
5.8	Function Declaration	5.9
5.9	Category of Functions	5.10
5.10	No Arguments and No Return Values	5.11
5.11	Arguments but No Return Values	5.12
5.12	Arguments with Return Values	5.15
5.13	No Arguments but Returns a Value	5.18
5.14	Functions that Return Multiple Values	5.19
5.15	Nesting of Functions	5.20
5.16	Recursion	5.21
5.17	Passing Arrays to Functions	5.22
5.18	Passing Strings to Functions	5.29
5.19	The Scope, Visibility and Lifetime of Variables	5.30
5.20	Multifile Programs	5.38
5.21	Tower of Hanoi	5.40
5.22	Preprocessor Commands	5.42
Unit 6	Pointers	6.1
6.1	Introduction	6.1
6.2	Understanding Pointers	6.1
6.3	Accessing the Address of a Variable	6.3
6.4	Declaring Pointer Variables	6.4
6.5	Initialization of Pointer Variables	6.5
6.6	Accessing a Variable Through its Pointer	6.6
6.7	Chain of Pointers	6.8
6.8	Pointer Expressions	6.9
6.9	Pointer Increments and Scale Factor	6.10

6.10	Pointers and Arrays	6.11
6.11	Pointers and Character Strings	6.14
6.12	Array of Pointers	6.16
6.13	Pointers as Function Arguments	6.17
6.14	Functions Returning Pointers	6.19
6.15	Pointers to Functions	6.20
6.16	Pointers and Structures	6.22
6.17	Introduction	6.25
6.18	Dynamic Memory Allocation	6.25
6.19	Allocating a Block of Memory: Malloc	6.26
6.20	Allocating Multiple Blocks of Memory: Calloc	6.28
6.21	Releasing the Used Space: Free	6.28
6.22	Command Line Arguments	6.29
Unit 7	Structure and Union Types	7.1
7.1	Introduction	7.1
7.2	Defining a Structure	7.1
7.3	Declaring Structure Variables	7.2
7.4	Accessing Structure Members	7.4
7.5	Structure Initialization	7.5
7.6	Copying and Comparing Structure variables	7.6
7.7	Operations on Individual Members	7.8
7.8	Arrays of Structures	7.8
7.9	Arrays within Structures	7.11
7.10	Structures within Structures	7.12
7.11	Structures and Functions	7.14
7.12	Unions	7.17
7.13	Size of Structures	7.18
7.14	Bit Fields	7.18
7.15	Typedef	7.20
7.16	Enum	7.21
Unit 8	File Handling	8.1
8.1	Introduction	8.1
8.2	Types of Files	8.2
8.3	Defining and Opening a File	8.2
8.4	Closing a File	8.3
8.5	Input/output Operations on Files	8.4
8.6	Error Handling During i/o Operations	8.9
8.7	Random Access to Files	8.11
Appendix A		A.1
Appendix B		B.1
Solved Question Paper Set-1		SQP-1.1
Solved Question Paper Set-2		SQP-2.1
Solved Question Paper Set-3		SQP-3.1
Solved Question Paper Set-4		SQP-4.1

PREFACE

It gives me great pleasure to present this edition of *Computer Programming* for JNTU Kakinada. This book on Computer Programming is for undergraduate students who take up the foundation course in their first semester at JNTU Kakinada. The Computer Programming portion derived from the best-selling book *Programming in ANSI C* provides time-tested material, which more than a million readers have used to learn programming in C in the past two decades. It follows a simplified approach to Computer Programming supported by numerous programming examples and exhaustive pedagogy.

Salient Features

- Comprehensively in sync with the latest syllabus of JNTU Kakinada
- Enhanced chapter structure with inclusion of ‘Key Terms’, ‘Just Remember’ and ‘Multiple-Choice Questions’
- Precise theory presented in lucid language
- Student-friendly approach
- Carries useful case studies with relevant chapters with stepwise solution provided for each Case Study
- Rich pedagogy:
 - 186 Solved C Programs
 - 22 Case Studies
 - 162 Multiple-Choice Questions
 - 277 Review Questions
 - 189 Programming Exercises
- The book comes with a CD which has
 - Previous Years’ Solved Question Papers
 - 208 Additional Objective/Review/Debugging type questions covering each unit
 - Program description in solved examples showing the key points in the program
 - Lab programs as per the new syllabus

Unit Organisation

The book has been divided into eight units. Unit 1 is divided into two parts—the first part gives an overview of computers, their development, characteristics and evolution. Next, the language C and its basics are introduced in the second part. Unit 2 explains selection and decision making. Unit 3 explains string manipulation, branching and looping statements and how to use these in C programs. Unit 4 covers creation of arrays and the different types of arrays. Functions, as a part of modular programming, are discussed in Unit 5. Pointers are covered in Unit 6. Unit 7 is on structures and union types. Finally, file handling is covered in Unit 8.

A large number of illustrations and example programs are provided to reinforce learning. Wherever necessary, concepts are explained pictorially to facilitate easy grasping and better understanding. Each unit includes a set of review questions, multiple-choice questions and programming exercises, which can be used by the readers to test their understanding of the concepts discussed in the unit.

Acknowledgements

I would like to thank all those who provided me with valuable feedback and inputs during the preparation of this book, and especially those at McGraw Hill Education (India), without whose help and cooperation, this book would not have had a timely release. I wish to express my appreciation to Mrs. Nagaratna Hegde for the content-development work she had done in this edition. The support, patience and inspiration that I got from my wife, Dr Sushila, are something that I cherish above all. Special thanks are also due to all my teacher friends and students for their encouragement. I hope everyone who desires to be a part of the next generation of computing will find this book interesting and useful. Further suggestions for improvement will always be welcome.

Feedback


Constructive suggestions and criticism always go a long way in enhancing any endeavour. We request all readers to email us their valuable comments/views/feedback for the betterment of the book at tmh.csefeedback@gmail.com, mentioning the title and author name in the subject line. Also, please feel free to report any piracy of the book spotted by you.

ROADMAP TO THE SYLLABUS

COMPUTER PROGRAMMING

Jawaharlal Nehru Technological University Kakinada

Module 1: Unit objective: Notion of Operation of a CPU, Notion of an algorithm and computational procedure, editing and executing programs in Linux
Introduction: Computer systems, Hardware and Software Concepts,
Problem Solving: Algorithm I Pseudo code, flowchart, program development steps, computer languages: machine, symbolic and highlevel languages, Creating and Running Programs:
Writing, Editing(vi/emacs editor), Compiling(gcc), Linking and Executing in under Linux. **BASICS OF C:** Structure of a c program, identifiers, basic data types and sizes. Constants, Variables, Arithmetic, relational and logical operators, increment and decrement operators, conditional operator, assignment operator, expressions, type conversions, Conditional Expressions, precedence and order of evaluation, Sample Programs.



GO TO:

CHAPTER 1 Introduction to Computers, Problem Solving and Basic of C

Module 2: Unit objective: understanding branching, iteration and data representation using arrays
SELECTION-MAKING DECISION: Two WAY SELECTION: if-else, null else, nested if, examples, Multi-way selection: switch, else-if, examples.
ITERATIVE: loops- while, do-while and or statements, break, continue, initialization and updating, event and counter controlled loops, Looping applications: Summation, powers, smallest and largest.
ARRAYS: Arrays- concepts, declaration, definition, accessing elements, storing elements, Strings and String Manipulations, 1-D arrays, 2-D arrays and character arrays, string manipulations, Multidimensional arrays, array applications: Matrix operations, checking the symmetricity of a Matrix.
STRINGS: concepts, c strings.



GO TO:

CHAPTER 2 Selection and Decision Making

CHAPTER 3 Arrays

CHAPTER 4 Strings and Iteration

Module 3: Objective: Modular programming and recursive solution formulation

FUNCTIONS- MODULAR PROGRAMMING: functions, basics, parameter passing, storage classes extern, auto, register, static, scope rules, block structure, user defined functions, standard library functions, recursive functions, Recursive solutions for fibonacci series, towers of Hanoi, header files, C Preprocessor, example c programs, Passing 1-D arrays, 2-D arrays to functions.



GO TO:

CHAPTER 5 Functions—Modular Programming

Module 4: Objective: Understanding pointers and dynamic memory allocation

POINTERS: pointers-concepts, initialization of pointer variables, pointers and function arguments, passing by address-dangling memory, address arithmetic, character pointers and functions, pointers to pointers, pointers and multi-dimensional arrays, dynamic memory management functions, command line arguments



GO TO:

CHAPTER 6 Pointers

Module 5: Objective: Understanding miscellaneous aspects of C

ENUMERATED, STRUCTURE AND UNION TYPES: Derived types- structures declaration, definition and initialization of structures, accessing structures, nested structures, arrays of structures, structures and functions, pointers to structures, self referential structures, unions, typedef, bit-fields, program applications

BIT-WISE OPERATORS: logical, shift, rotation, masks.



GO TO:

CHAPTER 7 Structure and Union Types

Module 6: Objective: Comprehension of file operations

FILE HANDLING: Input and output-concept of a file, text files and binary files, Formatted I/O, File I/O operations, example programs



GO TO:

CHAPTER 8 File Handling

Introduction to Computers and Problem Solving

1.1 INTRODUCTION

The term *computer* is derived from the word *compute*. A computer is an electronic device that takes data and instructions as an *input* from the user, *processes* data, and provides useful information known as *output*. This cycle of operation of a computer is known as the *input-process-output* cycle and is shown in Fig. 1.1 The electronic device is known as *hardware* and the set of instructions is known as *software*.

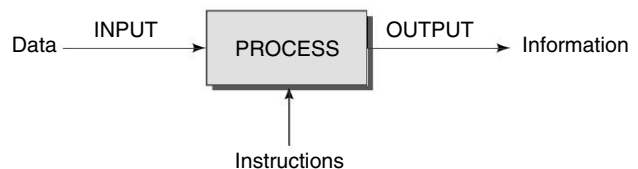


Fig. 1.1 Input—process—output concept

A computer consists of various components that function as an integrated system to perform computational tasks. These components include:

- **Central Processing Unit (CPU)** It is the brain of the computer that is responsible for controlling and executing program instructions.
- **Monitor** It is a display screen, which shows information in visual form.
- **Keyboard and Mouse** These are the peripheral devices used by the computer for receiving inputs from the user.

Figure 1.2 shows the various components of a computer.

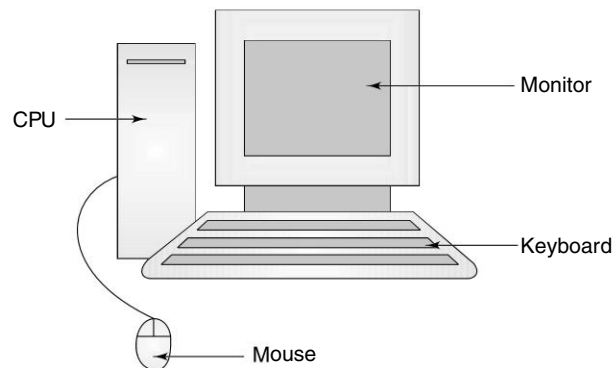


Fig. 1.2 The components of a computer

1.2 Computer Programming

The unique capabilities and characteristics of a computer have made it very popular among its various users, including engineers, managers, accountants, teachers, students, etc.

Some of the key characteristics of a modern digital computer include, among others:

- **Speed** Computer is a fast electronic device that can solve large and complex problems in few seconds. The speed of a computer generally depends upon its hardware configuration.
- **Storage capacity** A computer can store huge amount of data in many different formats. The storage area of a computer system is generally divided into two categories, main memory and secondary storage.
- **Accuracy** A computer carries out calculations with great accuracy. The accuracy achieved by a computer depends upon its hardware configuration and the specified instructions.
- **Reliability** A computer produces results with no error. Most of the computer-generated errors are in actuality human errors that are instigated by the user itself. Therefore, computers are regarded as quite trustworthy machines.
- **Versatility** Computers are versatile machines. They can perform varied tasks and can be used for many different purposes.
- **Diligence** Computers can perform repetitive calculations any number of times with the same level of accuracy.

These capabilities of computers have enabled us to use them for a variety of tasks. Application areas may broadly be classified into the following major categories.

1. Data processing (commercial use)
2. Numerical computing (scientific use)
3. Text (word) processing (office and educational use)
4. Message communication (e-mail)
5. Image processing (animation and industrial use)
6. Voice recognition (multimedia)

1.2 COMPUTER SYSTEMS

A computer system comprises of **hardware** and **software** components. Hardware refers to the physical parts of the computer system and software is the set of instructions or programs that are necessary for the functioning of a computer to perform certain tasks. Hardware includes the following components:

- **Input devices** They are used for accepting the data on which the operations are to be performed. The examples of input devices are keyboard, mouse and track ball.
- **Processor** Also known as CPU, it is used to perform the calculations and information processing on the data that is entered through the input device.
- **Output devices** They are used for providing the output of a program that is obtained after performing the operations specified in a program. The examples of output devices are monitor and printer.
- **Memory** It is used for storing the input data as well as the output of a program that is obtained after performing the operations specified in a program. Memory can be primary memory as well as secondary memory. Primary memory includes Random Access Memory (RAM) and secondary memory includes hard disks and floppy disks.

Software supports the functioning of a computer system internally and cannot be seen. It is stored on secondary memory and can be an **application software** as well as **system software**. The application software is used to perform a specific task according to requirements and the system software is mandatory for running application software. The examples of application software include Excel and MS Word and the examples of system software include operating system and networking system.

All the hardware components interact with each other as well as with the software. Similarly, the different types of software interact with each other and with the hardware components. The interaction between various hardware components is illustrated in Fig. 1.3.

1.2.1 Input Devices

Input devices can be connected to the computer system using cables. The most commonly used input devices among others are:

- Keyboard
- Mouse
- Scanner

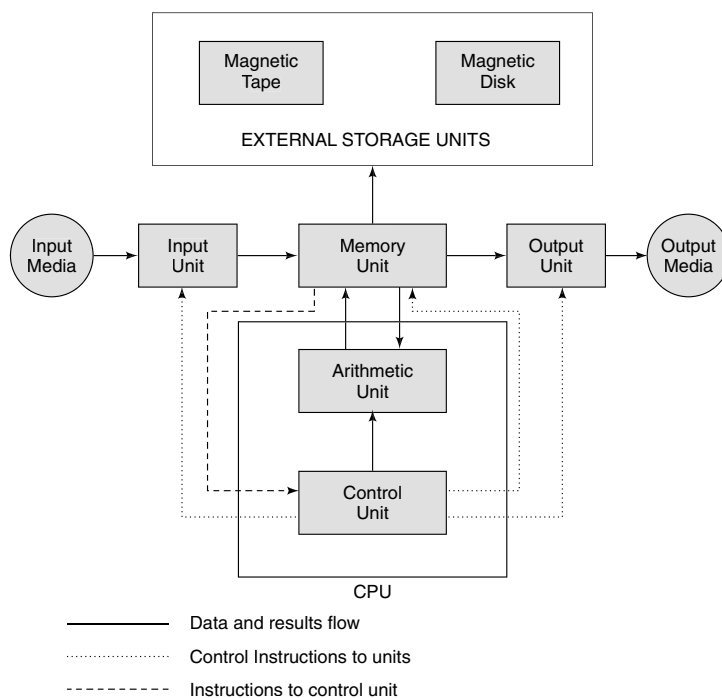


Fig. 1.3 Interaction among hardware components

Keyboard

A standard keyboard includes alphanumeric keys, function keys, modifier keys, cursor movement keys, spacebar, escape key, numeric keypad, and some special keys, such as Page Up, Page Down, Home, Insert, Delete and End. The alphanumeric keys include the number keys and the alphabet keys. The function keys are the keys that help perform a specific task such as searching a file or refreshing a Web page. The modifier keys such as Shift and Control keys modify the casing style of a character or symbol. The cursor movement keys include up, down, left and right keys and are used to modify the direction of the cursor on the screen. The spacebar key shifts the cursor to the right by one position. The numeric keypad uses separate keypads for numbers and mathematical operators. A keyboard is shown in Fig. 1.4.

1.4 Computer Programming

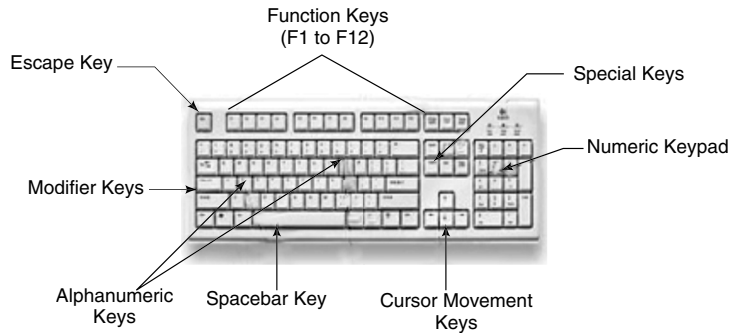


Fig. 1.4 Keyboard

Mouse

The mouse allows the user to select elements on the screen, such as tools, icons, and buttons, by pointing and clicking them. We can also use a mouse to draw and paint on the screen of the computer system. The mouse is also known as a pointing device because it helps change the position of the pointer or cursor on the screen.

The mouse consists of two buttons, a wheel at the top and a ball at the bottom of the mouse. When the ball moves, the cursor on the screen moves in the direction in which the ball rotates. The left button of the mouse is used to select an element and the right button, when clicked, displays the special options such as **open** and **explore** and **shortcut** menus. The wheel is used to scroll down in a document or a Web page. A mouse is shown in Fig. 1.5.

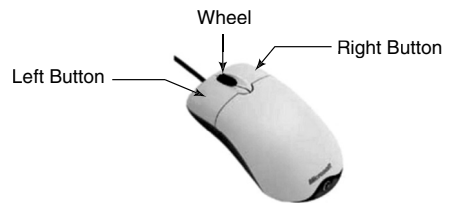


Fig. 1.5 Mouse

Scanner

A scanner is an input device that converts documents and images as the digitized images understandable by the computer system. The digitized images can be produced as black and white images, gray images, or colored images. In case of colored images, an image is considered as a collection of dots with each dot representing a combination of red, green, and blue colors, varying in proportions. The proportions of red, green, and blue colors assigned to a dot are together called as *color description*. The scanner uses the color description of the dots to produce a digitized image. Figure 1.6 shows a scanner.

There are the following types of scanners that can be used to produce digitized images:

- **Flatbed scanner** It contains a scanner head that moves across a page from top to bottom to read the page and converts the image or text available on the page in digital form. The flatbed scanner is used to scan graphics, oversized documents, and pages from books.
- **Drum scanner** In this type of scanner, a fixed scanner head is used and the image to be scanned is moved across the head. The drum scanners are used for scanning prepress materials.
- **Slide scanner** It is a scanner that can scan photographic slides directly to produce files understandable by the computer.



Fig. 1.6 Scanner

- **Handheld scanner** It is a scanner that is moved by the end user across the page to be scanned. This type of scanner is inexpensive and small in size.

1.2.2 CPU

The CPU consists of Control Unit (CU) and ALU. CU stores the instruction set, which specifies the operations to be performed by the computer. CU transfers the data and the instructions to the ALU for an arithmetic operation. ALU performs arithmetical or logical operations on the data received. The CPU registers store the data to be processed by the CPU and the processed data also. Apart from CU and ALU, CPU seeks help from the following hardware devices to process the data:

Motherboard

It refers to a device used for connecting the CPU with the input and output devices. The components on the motherboard are connected to all parts of a computer and are kept insulated from each other. Some of the components of a motherboard are:

- **Buses** Electrical pathways that transfer data and instructions among different parts of the computer. For example, the data bus is an electrical pathway that transfers data among the microprocessor, memory and input/output devices connected to the computer. The address bus is connected among the microprocessor, RAM and Read Only Memory (ROM), to transfer addresses of RAM and ROM locations that is to be accessed by the microprocessor.
- **System clock** It is a clock used for synchronizing the activities performed by the computer. The electrical signals that are passed inside a computer are timed, based on the tick of the clock. As a result, the faster the system clock, the faster is the processing speed of the computer.
- **Microprocessor** CPU component that performs the processing and controls the activities performed by the different parts of the computer. The microprocessor is plugged to the CPU socket placed on the motherboard.
- **ROM** Chip that contains the permanent memory of the computer that stores information, which cannot be modified by the end user.

Random Access Memory (RAM)

It refers to primary memory of a computer that stores information and programs, until the computer is used. RAM is available as a chip that can be connected to the RAM slots in the motherboard.

Video Card/Sound card

The video card is an interface between the monitor and the CPU. Video cards also include their own RAM and microprocessors that are used for speeding up the processing and display of a graphic. These video cards are placed on the expansion slots, as these slots allow us to connect the high-speed graphic display cards to the motherboard. A sound card is a circuit board placed on the motherboard and is used to enhance the sound capabilities of a computer. The sound cards are plugged to the Peripheral Component Interconnect (PCI) slots. The PCI slots also enable the connection of networks interface card, modem cards and video cards, to the motherboard. A motherboard is shown in Fig. 1.7

1.2.3 Output Devices

The data, processed by the CPU, is made available to the end user by the output devices. The most commonly used output devices are:

- Monitor
- Printer

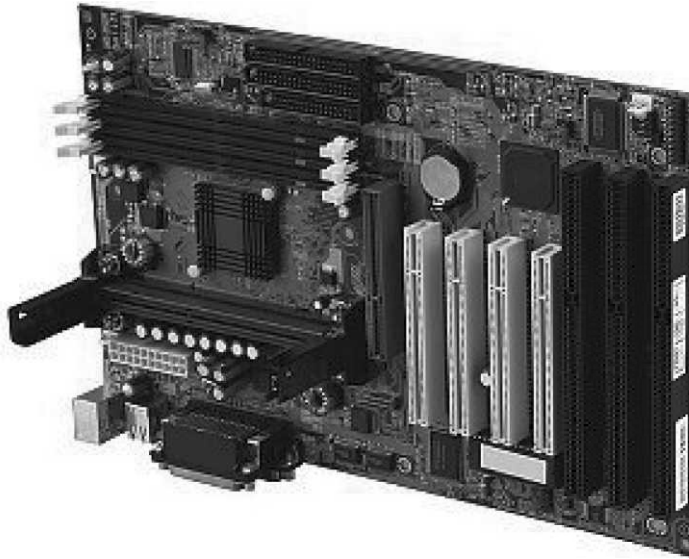


Fig. 1.7 A motherboard

- Speaker
- Plotter

Monitor

A monitor is the most commonly used output device that produces visual displays generated by the computer. The monitor, also known as a screen, is connected as an external device using cables or connected either as a part of the CPU case. The monitor connected using cables, is connected to the video card placed on the expansion slot of the motherboard. The display device is used for visual presentation of textual and graphical information.

The monitors can be classified as cathode ray tube (CRT) monitors or liquid crystal display (LCD) monitors. The CRT monitors are large, occupy more space in the computer, whereas LCD monitors are thin, light weighted, and occupy lesser space. Both the monitors are available as monochrome, gray scale and color models. However, the quality of the visual display produced by the CRT is better than that produced by the LCD.

A monitor can be characterized by its size and resolution. The monitor size is the length of the screen that is measured diagonally. The resolution of the screen is expressed as the number of picture elements or pixels of the screen. The resolution of the monitor is also called the dot pitch. The monitor with a higher resolution produces a clearer image. A monitor is shown in Fig. 1.8



Fig. 1.8 Monitor

Printer

The printer is an output device that is used to produce a hard copy of the electronic text displayed on the screen, in the form of paper sheets that can be used by the end user. The printer is an external device that is connected to the computer system using cables. The computer needs to convert the document that is to be printed to data that is understandable by the printer. The *printer driver software* or the *print driver software* is used to convert a document to a form understandable by the computer. When the computer components are upgraded, the upgraded printer driver software needs to be installed on the computer.

The performance of a printer is measured in terms of *dots per inch (DPI)* and *pages per minute (PPM)* produced by the printer. The greater the DPI parameter of a printer, the better is the quality of the output generated by it. The higher PPM represents higher efficiency of the printer. Printers can be classified based on the technology they use to print the text and images:

- **Dot matrix printers** Dot matrix printers are impact printers that use perforated sheet to print the text. The process to print a text involves striking a pin against a ribbon to produce its impression on the paper.
- **Inkjet printers** Inkjet printers are slower than dot matrix printers and are used to generate high quality photographic prints. Inkjet printers are not impact printers. The ink cartridges are attached to the printer head that moves horizontally, from left to right.
- **Laser printers** The laser printer may or may not be connected to a computer, to generate an output. These printers consist of a micro-processor, ROM and RAM, which can be used to store the textual information. The printer uses a cylindrical drum, a toner and the laser beam. A printer is shown in Fig. 1.9.



Fig. 1.9 Printer

Speaker

The speaker is an electromechanical transducer that converts an electrical signal into sound. They are attached to a computer as output devices, to provide audio output, such as warning sounds and Internet audios. We can have built-in speakers or attached speakers in a computer to warn end users with error audio messages and alerts. The audio drivers need to be installed in the computer to produce the audio output. The sound card being used in the computer system decides the quality of audio that we listen using music CDs or over the Internet. The computer speakers vary widely in terms of quality and price. The sophisticated computer speakers may have a subwoofer unit, to enhance bass output. Speakers are shown in Fig. 1.10.



Fig. 1.10 Speakers

Plotter

The plotter is another commonly used output device that is connected to a computer to print large documents, such as engineering or constructional drawings. Plotters use multiple ink pens or inkjets with color cartridges for printing. A computer transmits binary signals to all the print heads of the plotter. Each binary signal contains the coordinates of where a print head needs to be positioned for printing. Plotters are classified on the basis of their performance, as follows:

- **Drum plotter** They are used to draw perfect circles and other graphic images. They use a drawing arm to draw the image. The drum plotter moves the paper back and forth through a roller and the drawing arm moves across the paper.
- **Flat-bed plotter** A flat bed plotter has a flat drawing surface and the two drawing arms that move across the paper sheet, drawing an image. The plotter has a low speed of printing and is large in size.
- **Inkjet plotter** Spray nozzles are used to generate images by spraying droplets of ink onto the paper. However, the spray nozzles can get clogged and require regular cleaning, thus resulting in a high maintenance cost.
- **Electrostatic plotter** As compared to other plotters, an electrostatic plotter produces quality print with highest speed. It uses charged electric wires and special dielectric paper for drawing. A plotter is shown in Fig. 1.11.

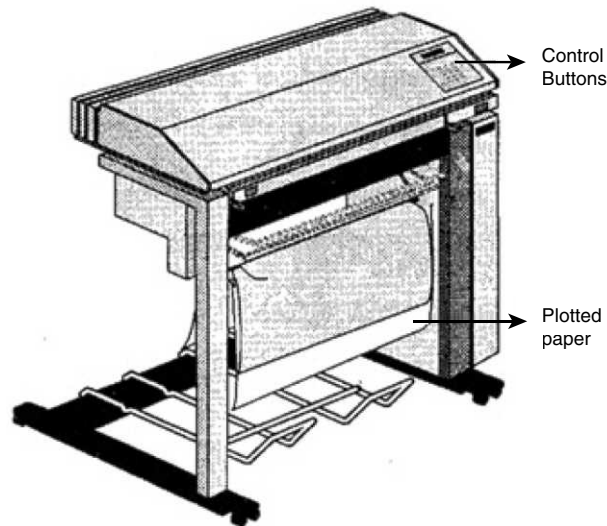


Fig. 1.11 An ink-jet plotter.

1.2.4 Memory

The memory unit of a computer is used to store data, instructions for processing data, intermediate results of processing and the final processed information. The memory units of a computer are classified as primary memory and secondary memory. Figure 1.12 shows the memory categorization in a computer system.

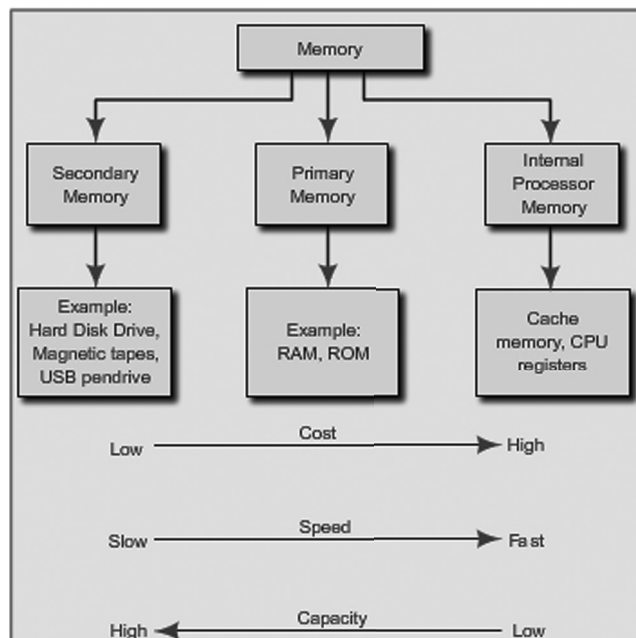


Fig. 1.12 Categorization of Memory Devices

Primary Memory

The primary memory is available in the computer as a built-in unit of the computer. The primary memory is represented as a set of locations with each location occupying 8 bits. Each bit in the memory is identified by a unique address. The data is stored in the machine-understandable binary form in these memory locations. The commonly used primary memories are:

- **ROM** ROM represents Read Only Memory that stores data and instructions, even when the computer is turned off. It is the permanent memory of the computer where the contents cannot be modified by an end user. ROM is a chip that is inserted into the motherboard. It is generally used to store the Basic Input/Output system (BIOS), which performs the Power On Self Test (POST).
- **RAM** RAM is the read/write memory unit in which the information is retained only as long as there is a regular power supply. When the power supply is interrupted or switched off, the information stored in the RAM is lost. RAM is a volatile memory that temporarily stores data and applications as long as they are in use. When the use of data or the application is over, the content in RAM is erased.
- **Cache memory** Cache memory is used to store the data and the related application that was last processed by the CPU. When the processor performs processing, it first searches the cache memory and then the RAM, for an instruction. The cache memory is always placed between CPU and the main memory of the computer system.

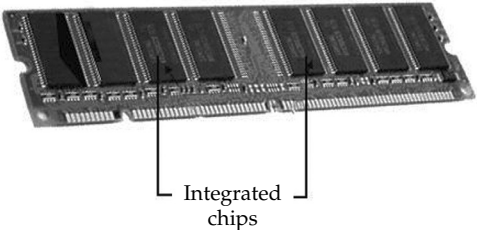


Fig. 1.13 RAM

Table 1.1 depicts some of the key differences between RAM and ROM:

Table 1.1

RAM	ROM
It is a read/write memory	It is a read only memory
It is volatile storage device	It is a permanent storage device
Data is erased as soon as power supply is turned off	Data remains stored even after power supply has been turned off
It is used as the main memory of a computer system	It is used to store Basic input output system (BIOS).

Secondary Memory

Secondary memory represents the external storage devices that are connected to the computer. They provide a non-volatile memory source used to store information that is not in use currently. A storage device is either located in the CPU casing of the computer or is connected externally to the computer. The secondary storage devices can be classified as:

- **Magnetic storage device** The magnetic storage devices store information that can be read, erased and rewritten a number of times. These include floppy disk, hard disk and magnetic tapes.
- **Optical storage device** The optical storage devices are secondary storage devices that use laser beams to read the stored data. These include

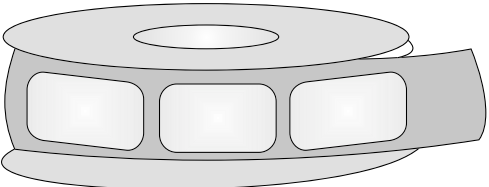


Fig. 1.14 Magnetic tape

1.10 Computer Programming

CD-ROM, rewritable compact disk (CD-RW), and digital video disks with read only memory (DVD-ROM).

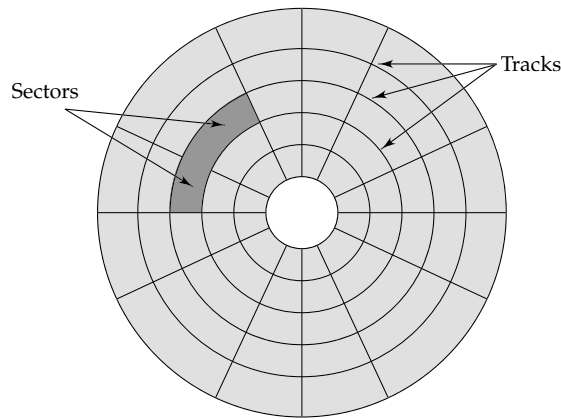


Fig. 1.15 Magnetic disk

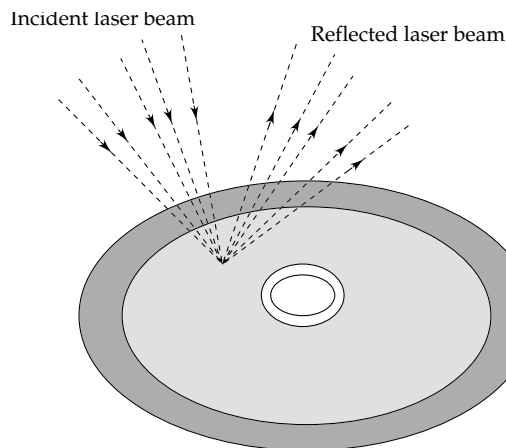


Fig. 1.16 Optical Disk

- **Magneto-optical storage device** The magneto-optical devices are generally used to store information, such as large programs, files and backup data. The end user can modify the information stored in magneto-optical storage devices multiple times. These devices provide higher storage capacity as they use laser beams and magnets for reading and writing data to the device. Examples of magneto-optical devices include Sony MiniDisc, Maxoptix T5-2600, etc.
- **Universal serial bus (USB) drive** USB drive or commonly known as pen drive is a removable storage device that is interfaced on the USB port of a computer system. It is pretty fast and compact in comparison to other storage devices like CD and floppy disk. One of the most important advantages of a USB drive is that it is larger in capacity as compared to other removable storage devices. Off late, it has become very popular amongst computer users.

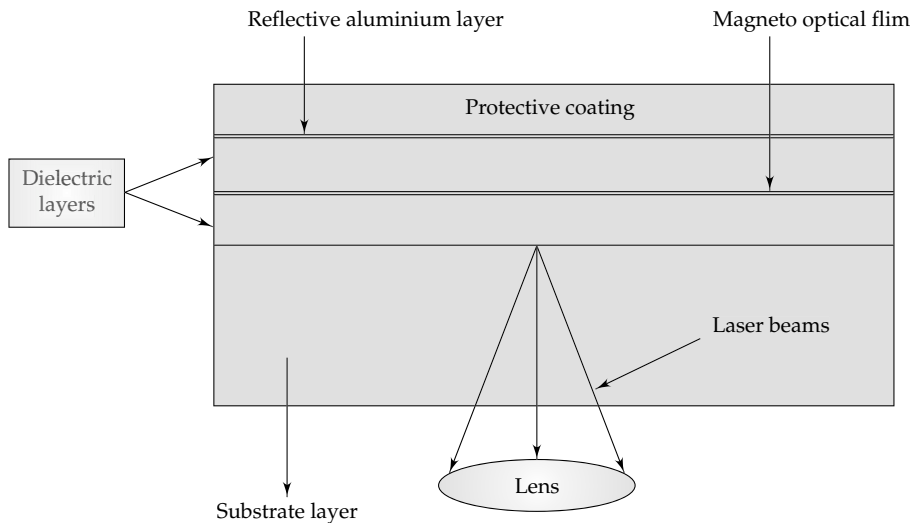


Fig. 1.17 Magneto-optical disk



Fig. 1.18 USB drive

1.3 PROGRAMMING LANGUAGES

The operations of a computer are controlled by a set of instructions (called *a computer program*). These instructions are written to tell the computer:

1. what operation to perform
2. where to locate data
3. how to present results
4. when to make certain decisions

The communication between two parties, whether they are machines or human beings, always needs a common language or terminology. The language used in the communication of computer instructions is known as the programming language. The computer has its own language and any communication with the computer must be in its language or translated into this language.

Three levels of programming languages are available. They are:

1. machine languages (low level languages)
2. assembly (or symbolic) languages
3. procedure-oriented languages (high level languages)

1.12 Computer Programming

Machine Language

As computers are made of two-state electronic devices they can understand only pulse and no-pulse (or '1' and '0') conditions. Therefore, all instructions and data should be written using *binary codes* 1 and 0. The binary code is called the *machine code* or *machine language*.

Computers do not understand English, Hindi or Tamil. They respond only to machine language. Added to this, computers are not identical in design, therefore, each computer has its own machine language. (However, the script 1 and 0, is the same for all computers). This poses two problems for the user.

First, it is difficult to understand and remember the various combinations of 1's and 0's representing numerous data and instructions. Also, writing error-free instructions is a slow process.

Secondly, since every machine has its own machine language, the user cannot communicate with other computers (If he does not know its language). Imagine a Tamilian making his first trip to Delhi. He would face enormous obstacles as the language barrier would prevent him from communicating.

Machine languages are usually referred to as the *first generation* languages.

Assembly Language

The Assembly language, introduced in 1950s, reduced programming complexity and provided some standardization to build an application. The assembly language, also referred to as the *second-generation* programming language, is also a low-level language. In an assembly language, the 0s and 1s of machine language are replaced with abbreviations or mnemonic code.

The main advantages of an assembly language over a machine language are:

- As we can locate and identify syntax errors in assembly language, it is easy to debug it.
- It is easier to develop a computer application using assembly language in comparison to machine language.
- Assembly language operates very efficiently.

An assembly language program consists of a series of instructions and mnemonics that correspond to a stream of executable instructions. An assembly language instruction consists of a mnemonic code followed by zero or more operands. The mnemonic code is called the *operation code* or *opcode*, which specifies the operation to be performed on the given arguments. Consider the following machine code:

10110000 01100001

Its equivalent assembly language representation is:

mov al, 061h

In the above instruction, the opcode "move" is used to move the hexadecimal value 61 into the processor register named 'al'. The following program shows the assembly language instructions to subtract two numbers:

ORG 500	/Origin of program is location 500
LDA SUB	/Load subtrahend to AC
CMA	/Complement AC
INC	/Increment AC
ADD MIN	/Add minuend to AC
STA DIF	/Store difference
HLT	/Halt computer
MIN, DEC 56	/Minuend
SUB, DEC -2	/Subtrahend
DIF, HEX 0	/Difference stored here
END	/End of symbolic program

It should be noted that during execution, the assembly language program is converted into the machine code with the help of an *assembler*. The simple assembly language statements had one-to-one correspondence with the machine language statements. This one-to-one correspondence still generated complex programs. Then, macroinstructions were devised so that multiple machine language statements could be represented using a single assembly language instruction. Even today programmers prefer to use an assembly language for performing certain tasks such as:

- To initialize and test the system hardware prior to booting the operating system. This assembly language code is stored in ROM
- To write patches for disassembling viruses, in anti-virus product development companies
- To attain extreme optimization, for example, in an inner loop in a processor-intensive algorithm
- For direct interaction with the hardware
- In extremely high-security situations where complete control over the environment is required
- To maximize the use of limited resources, in a system with severe resource constraints

High-Level Languages

High level languages further simplified programming tasks by reducing the number of computer operation details that had to be specified. High level languages like COBOL, Pascal, FORTRAN, and C are more abstract, easier to use, and more portable across platforms, as compared to low-level programming languages. Instead of dealing with registers, memory addresses and call stacks, a programmer can concentrate more on the logic to solve the problem with help of variables, arrays or Boolean expressions. For example, consider the following assembly language code:

```
LOAD A
ADD B
STORE C
```

Using FORTRAN, the above code can be represented as:

```
C = A + B
```

The above high-level language code is executed by translating it into the corresponding machine language code with the help of a compiler or interpreter.

High-level languages can be classified into the following three categories:

- Procedure-oriented languages (third generation)
- Problem-oriented languages (fourth generation)
- Natural languages (fifth generation)

Procedure-oriented Languages

High-level languages designed to solve general-purpose problems are called *procedural languages* or *third-generation languages*. These include BASIC, COBOL, FORTRAN, C, C++, and JAVA, which are designed to express the logic and procedure of a problem. Although, the syntax of these programming languages is different, they use English-like commands that are easy to follow. Another major advantage of third-generation languages is that they are portable. We can use the compiler (or interpreter) on any computer and create the object code. The following program represents the source code in C language:

```
if( n>10)
{
    do
    {
        n++;
    }while ( n<50);
}
```

1.14 Computer Programming

The third generation programming languages are considered as domain-specific programming languages because they are designed to develop software applications for a specific field. For example, the third generation programming language, COBOL, was designed to solve a large number of problems specific to the business field.

Problem-oriented Languages

Problem-oriented languages are used to solve specific problems and are known as the *fourth-generation* languages. These include query Languages, Report Generators and Application Generators which have simple, English-like syntax rules. Fourth-generation languages (4 GLs) have reduced programming efforts and overall cost of software development. These languages use either a visual environment or a text environment for program development similar to that of third-generation languages. A single statement in a fourth-generation language can perform the same task as multiple lines of a third-generation language. Further, the programmer just needs to drag and drop from the toolbar, to create various items like buttons, text boxes, labels, etc. Also, the programmer can quickly create the prototype of the software application.

These languages are typically used in the WYSIWYG (What You See Is What You Get) environment to facilitate faster and convenient application development. Visual Studio is one such environment that encompasses a number of programming tools as well multiple programming language support to ensure flexibility to the programmer during application development.

Natural Languages

Natural languages are designed to make a computer to behave like an expert and solve problems. The programmer just needs to specify the problem and the constraints for problem-solving. Natural languages such as LISP and PROLOG are mainly used to develop artificial intelligence and expert systems. These languages are widely known as *fifth generation* languages.

The programming languages of this generation mainly focus on constraint programming, which is somewhat similar to declarative programming. It is a programming paradigm in which the programmer only needs to specify the solution to be found within the constraints rather than specifying the method of finding the desired solution.

The programming languages of this generation allow the users to communicate with the computer system in a simple and an easy manner. Programmers can use normal English words while interacting with the computer system.

1.4 PROGRAMMING ENVIRONMENT

A programming environment comprises all those components that facilitate the development of a program. These components are largely divided under two categories—programming tools and Application Programming Interfaces (APIs). They are regarded as the building blocks of any programming environment.

An API can be defined as a collection of data structures, classes, protocols, and pre-defined functions stored in the form of libraries. These libraries are included in the software packages of the programming languages like C, C++, etc. An API makes the development task easier for the programmers, as in-built API components are used again and again, ensuring reusability.

The software application which is used for the development, maintenance and debugging of a software program is known as programming tool. A good programming tool ensures that the programming activities are performed in an efficient manner. The following are some of the main categories of programming tools:

- **Integrated Development Environment (IDE)** It is the most commonly used tool that offers an integrated environment to the programmers for software development. It contains almost all the components for software development such as compiler, editor, debugger, etc.

- **Debugging tool** It is a specialized tool that helps the programmer to detect and remove bugs or errors from a program.
- **Memory usage tool** As the name suggests, memory usage tool helps the programmer to manage the memory resources in an efficient manner.

1.5 CREATING AND RUNNING PROGRAMS

A programmer should adopt standard methodologies and approaches to program development. Software or program development life cycle is one such standard methodology that is applicable to all types of program development scenarios. It comprises of a number of interlinked phases with each phase serving a definite purpose. We will study the program development life cycle in more detail in the next section.

1.5.1 Structured Programming

Another important program development approach is structured programming, which is a subset of one of the key programming paradigms, i.e., procedural programming.

It helps in making a program easily understandable and debuggable. A program that is not based on the structured programming approach is very difficult to maintain, debug and understand.

Structured programming approach mainly focuses on the order of execution of the statements within a program. It suggests the use of sequential execution of statements in a program. Thus, structured programming approach suggests the use of mainly three types of control structures—sequential, repetitive and selective. Further, it suggests avoiding the use of **goto**, **break** and **continue** statements in a program as all these are unconditional branch statements.

1.5.2 System Development Tools

The successful development and execution of programs requires the usage of a number of tools. Some of these typical system development tools are

- Language translators
- Linkers
- Debuggers
- Editors

Language Translators

- **Assembler** An assembler is a computer program that translates assembly language statements into machine language codes. The assembler takes each of the assembly language statements from the source code and generates a corresponding bit stream using 0's and 1's. The output of the assembler in the form of sequence of 0's and 1's is called *object code* or *machine code*. This machine code is finally executed to obtain the results.

A modern assembler translates the assembly instruction mnemonics into opcodes and resolves symbolic names for memory locations and other entities to create the object code. Several sophisticated assemblers provide additional facilities that control the assembly process, facilitate program development, and aid debugging. The modern assemblers like Sun SPARC and MIPS based on RISC architectures, optimize instruction scheduling to attain efficient utilization of CPU. The modern assemblers generally include a macro facility and are called *macro assemblers*.

1.16 Computer Programming

Assemblers can be classified as *single-pass assemblers* and *two-pass assemblers*. The single-pass assembler was the first assembler that processed the source code once to replace the mnemonics with the binary code. The single-pass assembler was unable to support advanced source-code optimization. As a result, the two-pass assembler was developed that read the program twice. During the first pass, all the variables and labels are read and placed into the symbol table. On the second pass, the label gaps are filled from the table by replacing the label name with the address. This helps to attain higher optimization of the source code. The translation process of an assembler consists of the following tasks:

- Replacing symbolic addresses like LOOP, by numeric addresses
 - Replacing symbolic operation code by machine operation codes
 - Reserving storage for the instructions and data
 - Translating constants into their machine representation
- **Compiler** The compiler is a computer program that translates the source code written in a high-level language into the corresponding *object code* of the low-level language. This translation process is called *compilation*. The entire high-level program is converted into the executable machine code file. A program that translates from a low-level language to a high-level one is a decompiler. Compiled languages include COBOL, FORTRAN, C, C++, etc.

In 1952, Grace Hopper wrote the first compiler for the A-0 programming language. In 1957, John Backus at IBM introduced the first complete compiler. With the increasing complexity of computer architectures and expanding functionality supported by newer programming languages, compilers have become more and more complex. Though early compilers were written in assembly languages, nowadays it has become common practice to implement a compiler in the language it compiles. Compilers are also classified as *single-pass compilers* and *multi-pass compilers*. Though single-pass compilers are generally faster than multi-pass compilers, for sophisticated optimization, multi-pass assemblers are required to generate high-quality code.

- **Interpreter** The interpreter is a translation program that converts each high-level program statement into the corresponding machine code. This translation process is carried out just before the program statement is executed. Instead of the entire program, one statement at a time is translated and executed immediately. The commonly used interpreted languages are BASIC and PERL. Although, interpreters are easier to create as compared to compilers, the compiled languages can be executed more efficiently and are faster.

Linkers

Most of the high-level languages allow the developer to develop a large program containing multiple modules. Linker arranges the object code of all the modules that have been generated by the language translator into a single program. The execution unit of the computer system is incapable of linking all the modules at the execution time and therefore, linker is regarded as one of the important software because of its ability to combine all the modules into a single program. Linker assembles the various objects generated by the compiler in such a manner that all the objects are accepted as a single program during execution. Linker also includes the links of various objects, which are defined in the runtime libraries. In many cases, linker inserts the symbolic address of the objects in place of their real address. Figure 1.19 illustrates the working of a linker.

Debuggers

Debugger is the software that is used to detect the errors and bugs present in the programs. The debugger locates the position of the errors in the program code with the help of what is known as the Instruction Set Simulator (ISS) technique. ISS is capable of stopping the execution of a program at the point where an erroneous statement is encountered.

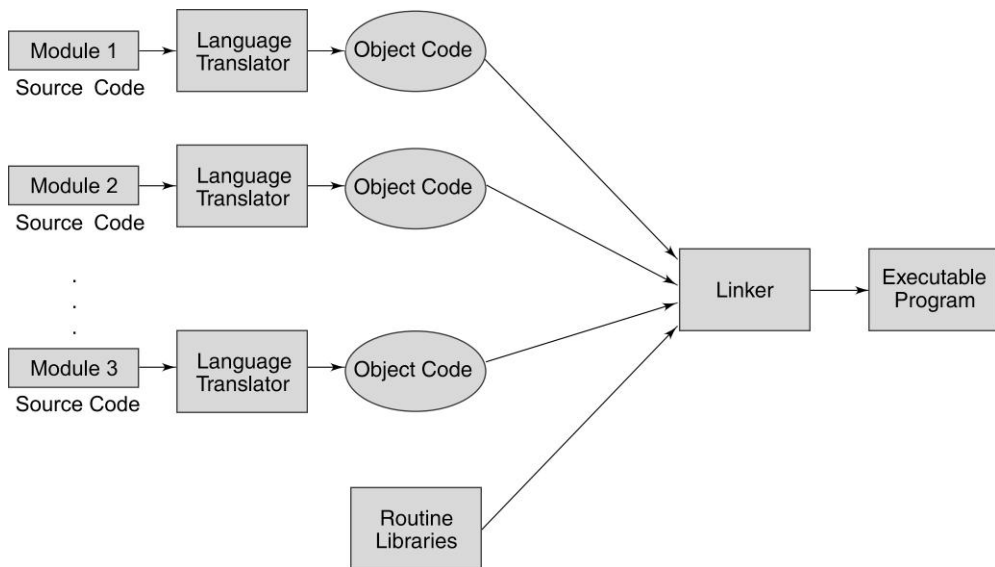


Fig. 1.19 Working of a linker

Debugger is divided into two types, namely machine-level debugger and symbolic debugger. The machine-level debugger debugs the object code of the program and shows all the lines where bugs are detected. On the other hand, the symbolic debugger debugs the original code, i.e., the high-level language code of the program. It shows the position of the bug in the original code of the program developed by the programmer.

While debugging a program, the debugger performs a number of functions other than debugging, such as inserting breakpoints in the original code, tracking the value of specific variables, etc. In order to debug the program, a debugger helps perform the following tasks:

- Step-by-step execution of a program
- Back tracking for checking the previous steps
- Stopping the execution of the program until the errors are corrected

Editors

Editor is a special program that allows the user to work with text in a computer system. It is used for the documentation purposes and enables us to edit the information present in an existing document or a file. The editor enables us to perform various editing operations such as copy, cut and paste while editing the text. On the basis of the content edited by the editors, they are divided into the following categories:

- **Text editor** It is used to edit plain text. An operating system always includes a text editor for updating the configuration files.
- **Digital audio editor** It is used to edit the information related to the audio components of a multimedia application. These editors are used in audio applications where editing the music and the sound signals is necessary.
- **Graphics editor** It is used to edit the information related to the graphical objects. These editors are generally used in the multimedia applications where the user is working with multiple animation objects.

1.18 Computer Programming

- **Binary file editor** It is used to edit the digital data or the binary data, i.e., data having strings of 0s and 1s.
- **HTML editor** It is used to edit the information included in the Web pages.
- **Source code editor** It is used to edit the source code of a program written in a programming language such as C, C++ and Java.

1.5.3 Developing a Program

Developing a program refers to the process of writing the source code for the required application by following the syntax and the semantics of chosen programming language. Syntax and semantics are the set of rules that a programmer needs to adhere while developing a program.

Before actually developing a program, the aim and the logic of the program should be very clear to the programmer. Therefore, the first stage in the development of a program is to carry out a detailed study of the program objectives. The objectives make the programmer aware of the purpose for which the program is being developed. After ascertaining the program objectives, the programmer needs to list down the set of steps to be followed for program development. This set of program development steps is called algorithm. The programmer may also use a graphical model known as flowchart to represent the steps defined in the program algorithm.

After the logic of the program has been developed either by an algorithm or a flowchart, the next step is to choose a programming language for actual development of the program code. There are a number of factors that should be taken into consideration while selecting the target programming language, such as performance and efficiency of the programming language, programmer's prior experience with the language, etc.

A programming language is typically bundled together with an IDE containing the necessary tools for developing, editing, running and debugging a computer program. For instance, Turbo C is provided with a strong and powerful IDE to develop, compile, debug and execute the programs.

Figure 1.20 shows the IDE of C language.



Fig. 1.20. The IDE of C Language.

Suppose we are required to develop a program for calculating the percentage of marks of two subjects for student and display the result. The first step in the development of a program for this problem is the preparation of an algorithm, as shown below:

```

Step 1 – Input the marks for first subject. (mark1)
Step 2 – Input the marks for second subject. (mark2)
Step 3 – Calculate the percentage.
           percentage = (mark1 + mark2)/200*100
Step 4 – If percentage > 40
Step 5 – Display Pass
Step 6 – Else
Step 7 – Display Fail
  
```

Figure 1.21 shows the flowchart for the above algorithm.

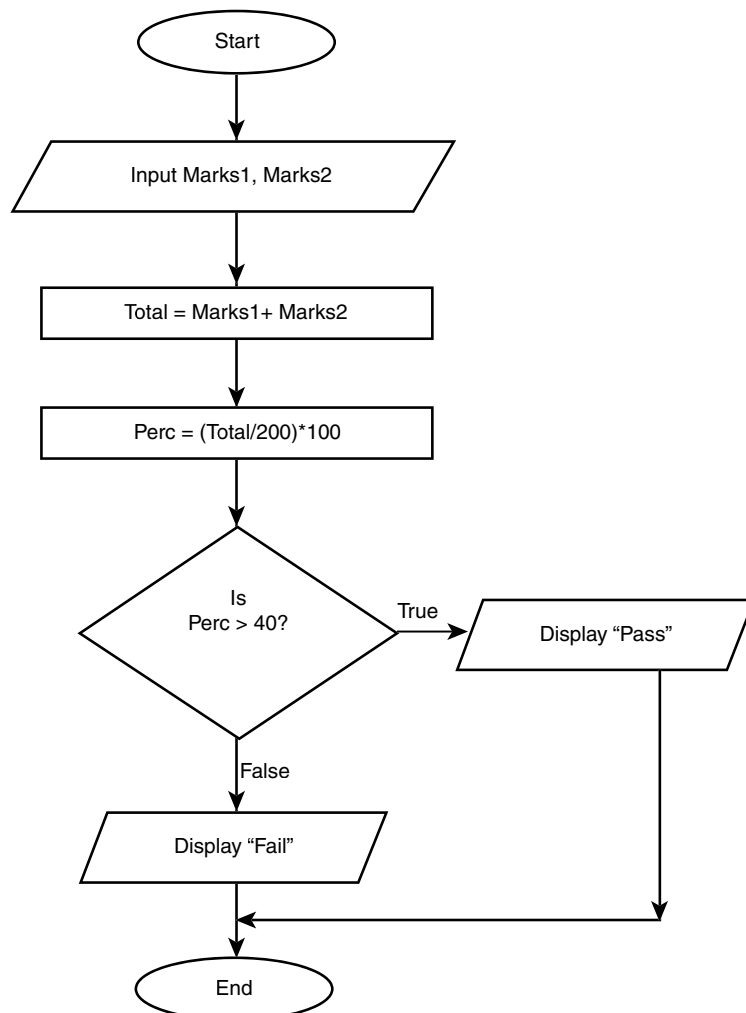


Fig. 1.21. Flowchart for calculating the percentage of marks and displaying the result.

1.20 Computer Programming

After developing the algorithm and flowchart, the actual development of the program can be started in the source code editor of C language. The following code shows the C language program for calculating the percentage of marks in two different subjects for a student.

```
#include<stdio.h>
#include<conio.h>
void main()
{
    float mark1,mark2;
    float percentage;
    clrscr();
    printf("\n Enter marks of first subject:");
    scanf("\n %f", &mark1);
    printf("\n Enter marks of second subject:");
    scanf("\n %f", &mark2);
    percentage = ((mark1+mark2)/200)*100;
    if(percentage>40)
    printf("\n The student is passed");
    else
    printf("\n The student is failed");
    getch();
}
```

Fig. 1.22 Program for calculating the percentage of marks in two subjects

Figure 1.23 shows the program code in the source code editor of C language.

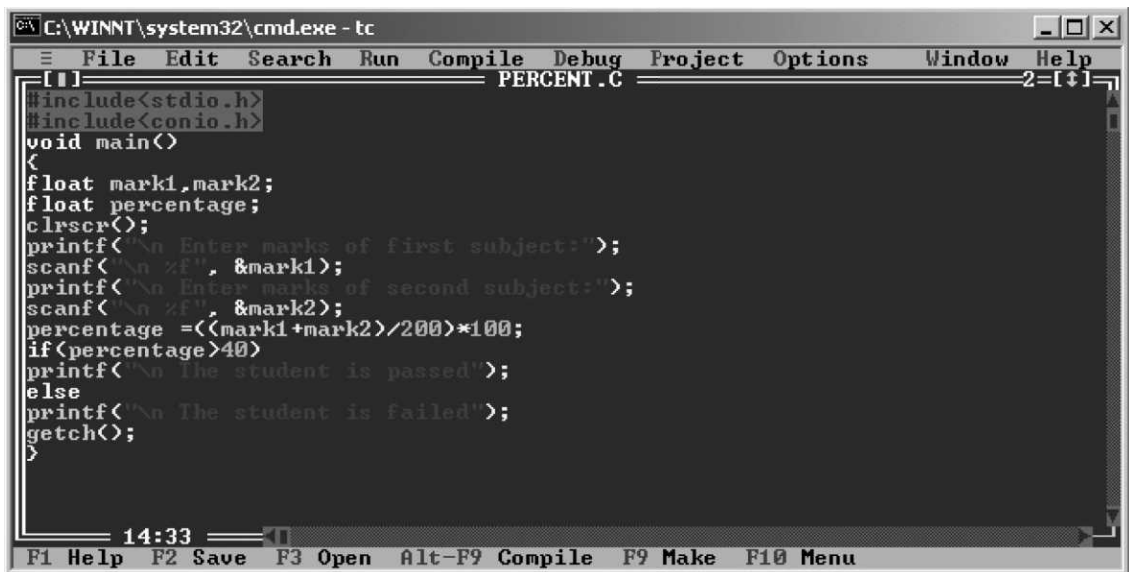


Fig. 1.23 Developing a program in the source code editor of C language.

1.5.4 Running a Program

After developing the program code, the next step is to compile the program. Program compilation helps identify any syntactical errors in the program code. If there are no syntax errors in the source code, then the compiler generates the target object code. It is the machine language code that the processor of the computer system can understand and execute.

Once the corresponding object code or the executable file is built by the compiler, the program can be run in order to check the logical correctness of the program and generate the desired output. The logical errors also called semantic errors might cause the program to generate undesired results. Programming languages provide various mechanisms such as exception handling for handling these logical errors. If the output generated by the program corresponding to the given inputs matches with the desired result, then the purpose of developing the program is served. Otherwise, the logic of the program should be checked again to obtain the correct solution for the given problem.

Figure 1.24 shows the output of the program developed in C language.

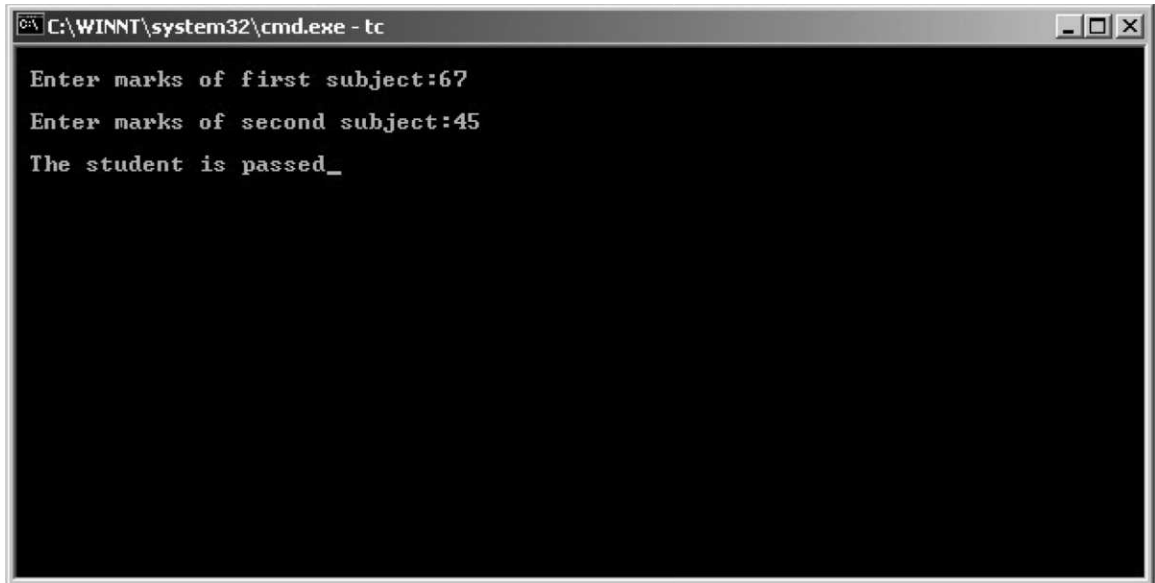


Fig. 1.24 Running a program.

The above figure shows the output generated by running the C program. We can run a program in C by either selecting Run → Run or by pressing the Alt and F9 keys simultaneously.

1.6 SOFTWARE DEVELOPMENT METHOD

The entire process of software development and implementation involves a series of steps. Each successive step is dependent on the outcome of the previous step. Thus, the team of software designers, developers and operators are required to interact with each other at each stage of software development so as to ensure that the end product is as per the client's requirements. Figure 1.25 shows the various software development steps:

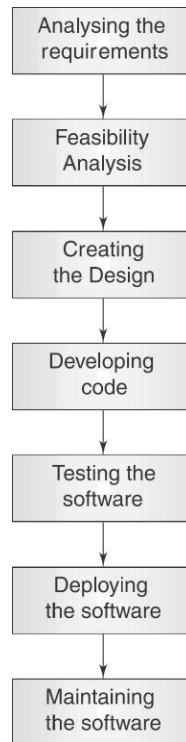


Fig. 1.25 Software development steps

1.6.1 Analysing the Requirements

In this step, the requirements related to the software, which is to be developed, are understood. Analysing the requirements or requirement analysis is an important step in the process of developing a software. If the requirements of the user are not properly understood, then the software is bound to fall short of the end user's expectations. Thus, requirement analysis is always the first step towards development of a software.

Software is abstract in nature; as a result, the users may not be able to provide the complete set of requirements pertaining to the desired software during the requirement analysis stage. Thus, there should be continuous interaction between the software development team and the end users. Moreover, the software development team also needs to take into account the fact that the requirements of the users may keep changing during the development process. Thus, proper analysis of user requirements is quite essential for developing the software within a given timeframe. It will not only help in controlling the software development cost but will also lead to faster and accurate development of a software.

The task of requirement analysis is typically performed by a business analyst. The person is a professional in this field who understands the requirements of the novice end user, and documents and shares it with the development team.

1.6.2 Feasibility Analysis

In this step, the feasibility of developing the software in terms of resources and cost is ascertained. In order to determine the feasibility of software development, the existing system of the user is analysed properly.

Apart from studying the existing system, this step involves identifying the need of automation in the existing system. The analysis done in this step is documented in a standard document called feasibility report, which contains the observations and recommendations related to the task of software development. Some of the important activities performed during the feasibility analysis stage are as follows:

- **Determining development alternatives** This activity involves searching for the different alternatives that are available for the development of software. There are mainly four alternatives available for the development of a software. The first alternative is to allow the existing system to continue without developing a new software for automation. The second alternative can be to develop the new software using specific programming languages such as Java, C++, Visual Basic etc. The third alternative is to develop the software using the architectural technologies such as Java 2 Enterprise Edition (J2EE) and mainframe based with thin clients. The fourth development alternative is to buy an already developed software along with its source code from the market and customise it according to the client's requirements.
- **Analysing economic feasibility** This activity involves determining whether the development of a new software will be financially beneficial or not. This type of feasibility analysis is performed to determine the overall profit that can be earned from the development and implementation of the software. This feasibility analysis activity involves evaluating all the alternatives available for development and selecting the one which is most economical.
- **Assessing technical feasibility** The technical feasibility assessment involves analysing various factors such as performance of the technologies, ease of installation, ease of expansion or reduction in size, interoperability with other technologies, etc. The technical feasibility activity typically involves the study of the nature of technology as to how easily it can be learnt and the level of training required to understand the technology. This type of feasibility assessment greatly helps in selecting the appropriate technologies to be used for developing the software. The selection should be made after evaluating the requirement specification of the software. In addition, the advantages and disadvantages of each identified technology must also be evaluated during technical feasibility assessment.
- **Analysing operational feasibility** Operational feasibility assessment involves studying the software on operational and maintenance fronts. The operational feasibility of any software is done on the basis of several factors, such as:
 - Type of tools needed for operating the software
 - Skill set required for operating the software
 - Documentation and other support required for operating the software

1.6.3 Creating the Design

After the feasibility analysis stage, the next step is creating the architecture and design of the new software. This step involves developing a logical model or basic structure of the new software. For example, if the new software is based on client–server technology then this step would involve determining and specifying the number of tiers to be used in the client–server design. This step also involves documenting the varied specifications pertaining to database and data structure design. The flow of the development process is mainly illustrated in this stage using a special language known as Unified Modelling Language (UML). UML uses pictorial representation methods for depicting the flow of data in the software. Some of the key features, which are considered while designing a software, are:

- **Extensibility** The design of the software should be extensible so that it allows the addition of some new options or modules in future. The architecture of the software should be flexible enough to not get disturbed with the addition of new functionality.

1.24 Computer Programming

- **Modularity** The software should be modular in nature so that its working and data flow can be understood easily. Modularity also helps in parallel development of the various software modules, which are later integrated into a single software product.
- **Compatibility** Software should run correctly in the existing system with an older version or with other software. Thus, software should be compatible and work well in conjunction with other software.
- **Security** Software must be able to control unauthorised access. While designing a new software, it is ensured that there are proper security mechanisms incorporated in the product.
- **Fault tolerance** The software should be capable of handling exceptions or faults that may occur during its operation. The software must have the capability to recover from failures.
- **Maintainability** The design of the software should be created in a simple manner with appropriate details so that it is easy to maintain.

1.6.4 Developing the Code

In this step, the code for the different modules of the new software is developed. The code for the different modules is developed according to the design specifications of each module. The programmers in the software development team use tools like compilers, interpreters and debuggers to perform tasks such as finding errors in the code and converting the code into machine language for its execution. The code can be written using programming languages such as C, C++ or Java. The choice of the programming language to be used for developing the code is made on the basis of the type of software that is to be developed. There are certain key points or conventions, which must be kept in mind while writing code; for instance:

- There should be proper indentation in the code.
- Proper naming conventions should be followed for naming the variables, methods and program files.
- Proper comments should be included to ensure ease of understanding during maintenance.
- The code for different modules of the new software must be simple so that it can be easily understood.
- The code must be logically correct so as to minimise logical errors in the program.

1.6.5 Testing the Software

Testing is basically performed to detect the prevalence of any errors in the new software and rectify those errors. One of the reasons for the occurrence of errors or defects in a new software is that the requirements of the users or client were not properly understood. Another reason for the occurrence of errors is the common mistakes committed by a programmer while developing the code. The two important activities that are performed during testing are verification and validation. Verification is the process of checking the software based on some pre-defined specifications, while validation involves testing the product to ascertain whether it meets the user's requirements. During validation, the tester inputs different values to ascertain whether the software is generating the right output as per the original requirements. The various testing methodologies include:

- Black box testing
- White box testing
- Gray box testing
- Nonfunctional testing
- Unit testing
- Integration testing
- System testing
- Acceptance testing

1.6.6 Deploying the Software

In this step, the newly developed and fully tested software is installed in its target environment. Software documentation is handed over to the users and some initial data are entered in the software to make it operational. The users are also given training on the software's interface and its other functions.

1.6.7 Maintaining the Software

Once the software has been deployed successfully, a continuous support is provided to it for ensuring its full-time availability. A corrupt file, a virus infection and a fatal error are some of the situations where the maintenance personnel are asked to fix the software and bring it back to its normal functioning. Further, a software may also be required to be modified if its environment undergoes a change. In order to successfully maintain the software, it is required that it should have been properly documented at the time of its development. This is because the maintenance person might not be the same who was originally involved in the development of the software. Thus, a good code documentation serves vital for the maintenance person to fix the software.

1.7 APPLYING SOFTWARE DEVELOPMENT METHOD

To understand how software development method is applied, consider a simple scenario where it is required to convert the temperature given in Fahrenheit to its corresponding Celsius value.

Program Objective

To convert the temperature value from Fahrenheit to Celsius

Analysis

Input: Temperature value in Fahrenheit

Output: Temperature value in Celsius

Conversion method: The formula $C = (F - 32) / 1.8$ can be used to generate the desired output

Data elements: Real Variable F is used to store the input temperature value in Fahrenheit

Real Variable C is used to store the resultant temperature value in Celsius

Design

Algorithm

```
Step 1 – Read F
Step 2 – Compute C = (F-32) / 1.8
Step 3 – Display C
```

Development

Program

```
#include <stdio.h>
#include <conio.h>

void main()
{
    float F, C;
```

(Contd.)

1.26 Computer Programming

```
clrscr();

printf("Enter the temperature value in Fahrenheit: ");
scanf("%f",&F);

C=(F-32.0)/1.8;

printf("The equivalent temperature value in degrees Celsius is: %.2f",C);
getch();
}
```

Testing

The program must be tested with multiple input values so as to ensure that there are no logical errors present in the code.

```
Enter the temperature value in Fahrenheit: 0
The equivalent temperature value in degrees Celsius is: -17.78

Enter the temperature value in Fahrenheit: 175
The equivalent temperature value in degrees Celsius is: 79.44

Enter the temperature value in Fahrenheit: 250
The equivalent temperature value in degrees Celsius is: 121.11
```

1.8 PROBLEM SOLVING

Problems that can be solved through a computer may range in size and complexity. Since computers do not possess any common sense and cannot make any unplanned decisions, the problem, whether it is simple or complex, has to be broken into a well-defined set of solution steps for the computer to implement.

Problem solving is the process of solving a problem in a computer system by following a sequence of steps, which include:

1. **Developing an algorithm** An algorithm is a sequence of steps written in the form of English phrases that specify the tasks that are performed while solving a problem. It involves identifying the variable names and types that would be used for solving the problem.
2. **Drawing the flowchart** A flowchart is the graphical representation of the flow of control and logic in the solution of a problem. The flowchart is a pictorial representation of an algorithm.
3. **Writing the Pseudocode** Pseudocode is pretty much similar to algorithms. It uses generic syntax for describing the steps that are to be performed for solving a problem. Along with the statements written using generic syntax, pseudocode can also use English phrases for describing an action.

1.9 ALGORITHMS

Algorithms help a programmer in breaking down the solution of a problem into a number of sequential steps. Corresponding to each step a statement is written in a programming language; all these statements are collectively termed as a program.

The following is an example of an algorithm to add two integers and display the result:

Algorithm
 Step 1 – Accept the first integer as input from the user.
 (num1)
 Step 2 – Accept the second integer as input from the user.
 (num2)
 Step 3 – Calculate the sum of the two integers.
 (sum = num1 + num2)
 Step 4 – Display sum as the result.

Fig. 1.26 Algorithm to add two integers and display the result

There is a time and space complexity associated with each algorithm. Time complexity specifies the amount of time required by an algorithm for performing the desired task. Space complexity specifies the amount of memory space required by the algorithm for performing the desired task. While solving a complex problem, it is possible to have multiple algorithms for obtaining the required solution. The algorithm that ensures best time and space trade off should be chosen for obtaining the desired solution.

1.9.1 Characteristics of Algorithms

The typical characteristics that are necessary for a sequence of instructions to qualify as an algorithm are the following:

- The instructions must be in an ordered form.
- The instructions must be simple and concise. They must not be ambiguous.
- There must be an instruction (condition) for program termination.
- The repetitive programming constructs must possess an exit condition. Otherwise, the program might run infinitely.
- The algorithm must completely and definitely solve the given problem statement.

1.9.2 Advantages of Algorithms

Some of the key advantages of algorithms are the following:

- It provides the core solution to a given problem. This solution can be implemented on a computer system using any programming language of user's choice.
- It facilitates program development by acting as a design document or a blueprint of a given problem solution.
- It ensures easy comprehension of a problem solution as compared to an equivalent computer program.
- It eases identification and removal of logical errors in a program.
- It facilitates algorithm analysis to find out the most efficient solution to a given problem.

1.9.3 Disadvantages of Algorithms

Apart from the advantages, algorithms also possess certain limitations, which are

- In large algorithms, the flow of program control becomes difficult to track.
- Algorithms lack visual representation of programming constructs like flowcharts; thus, understanding the logic becomes relatively difficult.

EXAMPLE 1.1 Write an algorithm to find out whether a given number is prime or not.

Solution

Algorithm

```
Step 1 - Start
Step 2 - Accept a number from the user (num)
Step 3 - Initialize looping counter i = 2
Step 4 - Repeat Step 5 while i < num
Step 5 - If remainder of num divided by i (num%i) is Zero then goto Step 6 else goto Step 4
Step 6 - Display "num is not a prime number" and break from the loop
Step 7 - If i = num then goto Step 8 Else goto Step 9
Step 8 - Display "num is a prime number"
Step 9 - Stop
```

Fig. 1.27 Algorithm to find out whether a given number is prime

EXAMPLE 1.2 Write an algorithm to find the average of marks obtained by a student in three subjects.

Solution

Algorithm

```
Step 1 - Start
Step 2 - Accept the marks in three subjects from the user (marks1, marks2, marks3)
Step 3 - Calculate average marks using formula, average = (marks1 + marks2 + marks3)/3
Step 4 - Display the computed average of three subject marks
Step 5 - Stop
```

Fig. 1.28 Algorithm to find the average marks of three subjects

EXAMPLE 1.3 Write an algorithm to determine whether the given year is a leap year or not.

Solution

Algorithm

```
Step 1 - Start
Step 2 - Accept an year value from the user (year)
Step 3 - If remainder of year value divided by 4 (year%4) is 0 then goto Step 4 else goto Step 5
Step 4 - Display "'year' is a leap year" and goto Step 6
Step 5 - Display "'year' is not a leap year"]
Step 6 - Stop
```

Fig. 1.29 Algorithm to determine a leap year

EXAMPLE 1.4 Write an algorithm to find out whether a given number is even or odd.

Solution

Algorithm

```
Step 1 - Start
Step 2 - Accept a number from the user (num)
```

(Contd.)


```

Step 3 – If remainder of num divided by 2 (num/2) is Zero then goto Step 4 else goto Step 5
Step 4 – Display "num is an even number" and goto Step 6
Step 5 – Display "num is an odd number"
Step 6 – Stop

```

Fig. 1.30 Algorithm to find out whether a number is even or odd

EXAMPLE 1.5 Write an algorithm to determine whether a given string is a palindrome or not.

Solution

Algorithm

```

Step 1 - Start
Step 2 - Accept a string from the user (str)
Step 3 - Calculate the length of string str (len)
Step 4 - Initialize looping counters left=0, right=len-1 and chk = 't'
Step 5 - Repeat Steps 6-8 while left < right and chk = 't'
Step 6 - If str(left) = str(right) goto Step 8 else goto step 7
Step 7 - Set chk = 'f'
Step 8 - Set left = left + 1 and right = right - 1
Step 9 - If chk='t' goto Step 10 else goto Step 11
Step 10 - Display "The string is a palindrome" and goto Step 12
Step 11 - Display "The string is not a palindrome"
Step 12 - Stop

```

Fig. 1.31 Algorithm to determine a palindrome

1.10 FLOWCHARTS

A flowchart can be defined as the pictorial representation of a process, which describes the sequence and flow of control and information within the process. The flow of information is represented inside the flowchart in a step-by-step form. This technique is mainly used for developing business workflows and solving problems using computers.

Flowchart uses different symbols for depicting different activities, which are performed at different stages of a process. The various symbols used in a flowchart are:

- **Start and end** It is represented by an oval or a rounded rectangle. It represents the starting and the ending of a process. Every process starts and ends at some point so a flowchart always contains one start as well as one end symbol. Figure 1.32 shows the start and the end symbols used in a flowchart.




Fig. 1.32 Start and end symbol.

- **Input or output** It is represented by a parallelogram. It represents the inputs given by the user to the process and the outputs given by the process to the user. Figure 1.33 shows the input or output symbol.



Fig. 1.33 Input or output symbol.

- **Action or process** It is represented by a rectangle. It represents the actions, logics and calculations taking place in a process. Figure 1.34 shows the action or process symbol.

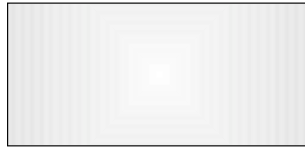


Fig. 1.34 Action or process symbol.

- **Decision or condition** It is represented by a rhombus or a diamond shape. It represents the condition or the decision-making step in a flowchart. The result of the decision is a Boolean value, which is either true or false. Each of these values takes the flow of the program to a certain point, which is shown with the help of arrows. Figure 1.35 shows the decision or condition symbol.

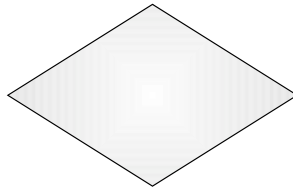


Fig. 1.35 Decision or condition symbol.

- **Arrow** It is represented by a directed line. It represents the flow of process and the sequence of steps in a flowchart. It guides the process about the direction and the sequence, which is to be followed while performing the various steps in the process. Figure 1.36 shows the arrow symbol.




Fig. 1.36 Arrow symbol.

- **Connector** It is represented by a circle in a flowchart. It represents the continuation of the flow of steps when a flowchart continues to the next page. A character such as an alphabet (a to z) or a symbol (α , β or χ), etc. can be placed in the circle at the position where the flow is broken and the same character is also placed in the circle at the position from where the flowchart continues. Figure 1.37 shows the connector symbol.












Fig. 1.37 Connector symbol.

In addition to the above mentioned basic flowchart symbols, certain other symbols are also used inside flowcharts for depicting advanced operations. Table 1.2 shows some of these advanced flowchart symbols:

Symbol	Description
	Represents the internal memory of a computer system, such as RAM and ROM
	Represents a database
	Represents a subroutine
	Represents a set of documents
	Represents an idle or waiting state
	Merges multiple data sets into one
	Extracts individual sets of data items from a single data set
	Represents a combination of merge and extract actions. It extracts multiple data sets from multiple input data sets.

In order to understand how a flowchart represents the flow of information; consider an example of a flowchart for adding two numbers, as shown in Fig. 1.38.

Flowchart

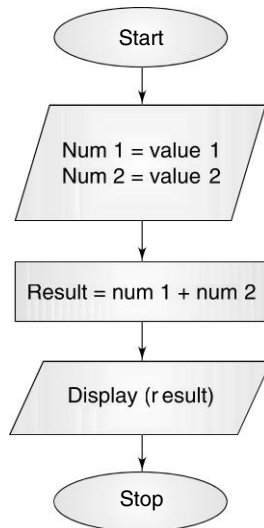


Fig. 1.38 Flowchart for addition of two numbers.

1.10.1 Flowchart Design Rules

Some of the standard guidelines or rules that must be followed while designing a flowchart are

- It must begin with a “Start” and end with a “Stop” symbol.
- The standard process flow should be either from top to bottom or from left to right.
- The instructions specified in the flowchart must be crisp and concise.
- The arrows must be aligned properly so as to clearly depict the flow of program control.
- The use of connectors should be generally avoided as they make the program look more complex.
- A process or action flowchart symbol must have only one input arrow and one output arrow.
- Two arrows must never intersect or cross each other; if such a need arises, then appropriate bridge or crossover symbols must be used.

1.10.2 Advantages of Flowcharts

Some of the key advantages of using a flowchart in program design are

- It helps to understand the flow of program control in an easy way.
- Developing program code by referring its flow chart is easier in comparison to developing the program code from scratch.
- It helps in avoiding semantic errors.
- Any concept is better understood with the help of visual representation. This fact also holds true for flowcharts. It is easier to understand the pictorial representation of a programming logic.
- A flowchart acts as documentation for the process or program flow.
- The use of flowcharts works well for small program design.

1.10.3 Disadvantages of Flowcharts

Flowcharts also have certain limitations, such as the following:

- For a large program, the flow chart might become very complex and confusing.
- Modification of a flowchart is difficult and requires almost an entire rework.
- Since flowcharts require pictorial representation of programming elements, it becomes a little tedious and time consuming to create a flowchart.
- Excessive use of connectors in a flowchart may at times confuse the programmers.

EXAMPLE 1.6 Draw a flowchart for the problem statement given in Example 1.1.

Solution

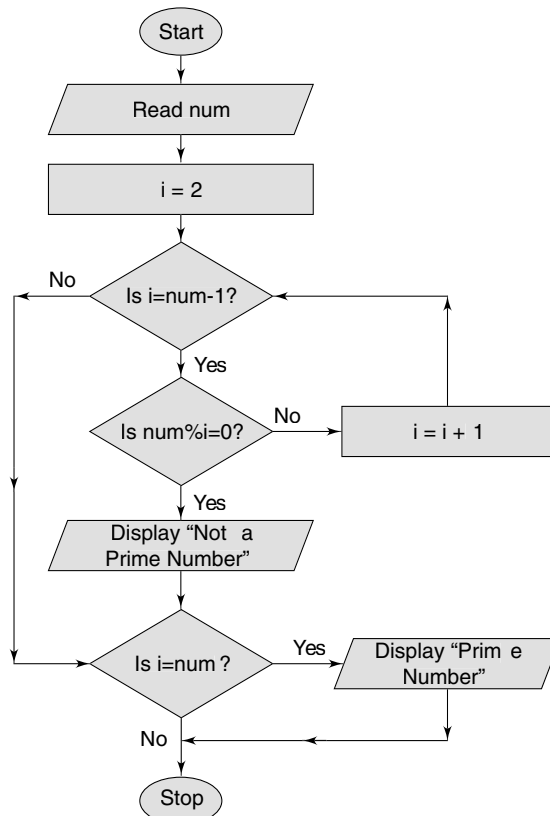


Fig. 1.39 Flowchart to find out whether a given number is prime or not

EXAMPLE 1.7 Draw a flowchart for the problem statement given in Example 1.2.

Solution

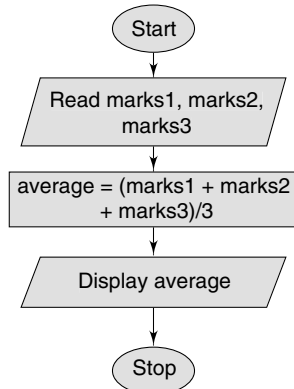


Fig. 1.40 Flowchart to find the average of marks obtained by a student

EXAMPLE 1.8 Draw a flowchart for the problem statement given in Example 1.3.

Solution

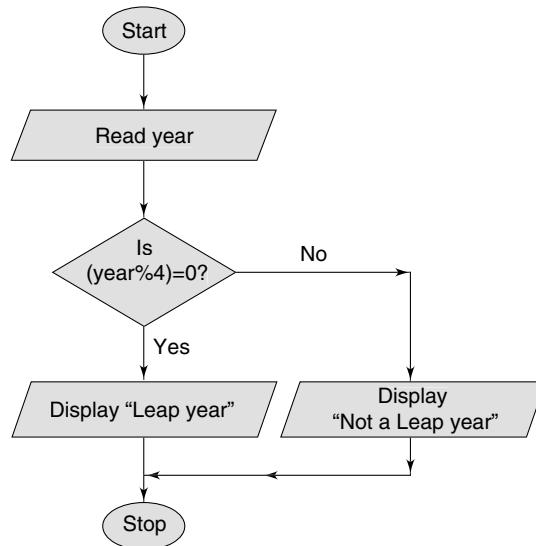


Fig. 1.41 Flowchart to determine whether the given year is a leap year or not

EXAMPLE 1.9 Draw a flowchart for the problem statement given in Example 1.4.

Solution

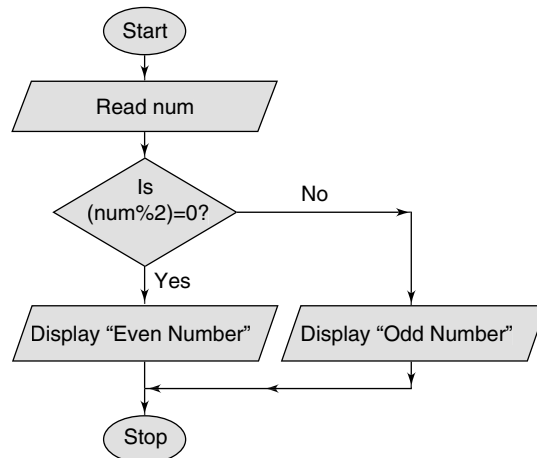


Fig. 1.42 Flowchart to find out whether a given number is even or odd

EXAMPLE 1.10 Draw a flowchart for the problem statement given in Example 1.5.

Solution

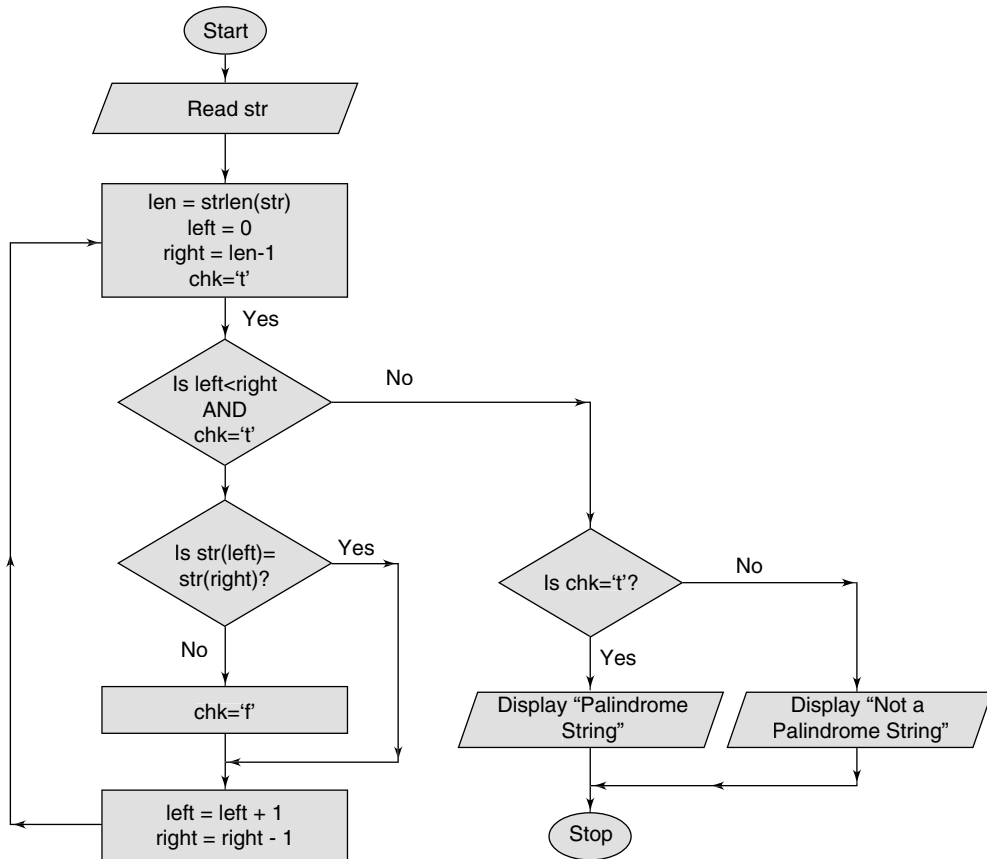


Fig. 1.43 Flowchart to determine whether a given string is a palindrome or not

1.11 PSEUDOCODES

Analyzing a detailed algorithm before developing a program is very time consuming. Hence, there arises a need of a specification that only focuses on the logic of the program. Pseudocodes serve this purpose by specifying only the logic, which is used by the programmer for developing a computer program.

Pseudocode is not written using specific syntax of a programming language rather it is written with a combination of generic syntax and normal English language. It helps the programmer understand the basic logic of the program after which it is the programmer's choice to write the final code in any programming language.

The example of a pseudocode to add two numbers and display the result is shown below:

Pseudocode

```
DEFINE: Integer num1, num2, result
READ: Integer num1
READ: Integer num2
SET: result = num1 + num2
Display: result
```

Fig. 1.44 Pseudocode to add two numbers and display the result

After the pseudocode for a computer program has been written, it is used to develop the source code for the computer program. The source code is developed using a programming language, which can be an assembly language or a high level programming language.

1.11.1 Pseudocode Rules

Some of the standard guidelines or rules that must be followed while developing pseudocodes are

- Instruction or operation code in a pseudocode statement must be kept all capitalized; for example READ (specifying input operation), PRINT (specifying print command), and so on.
- The ending of looping and decision-making constructs must be labelled appropriately with corresponding "END" keywords.
- The pseudocode instructions must be properly indented just like the statements are indented in a computer program.
- Convolved programming instructions must be avoided by writing simple and clear instructions.

1.11.2 Advantages of Pseudocodes

Some of the key advantages of using a pseudocode in program design are

- It is easy to comprehend as it uses English phrases for writing program instructions.
- Developing program code using pseudocode is easier in comparison to developing the program code from scratch.
- Developing program code using pseudocode is also easier in comparison to developing the program code from flowchart.
- The pseudocode instructions are easier to modify in comparison to a flowchart.
- The use of pseudocode works well for large program design.

1.11.3 Disadvantages of Pseudocodes

Pseudocodes also have certain limitations, as explained below:

- Since pseudocode does not use any kind of pictorial representations for program elements; it may at times become difficult to understand the program logic.
- There is no standard format for developing a pseudocode. Therefore, it may become a challenge to use the same pseudocode by different programmers.
- Pseudocodes are at a disadvantage in comparison to flowcharts when it comes to understanding the flow of program control.

EXAMPLE 1.11 Write the pseudocode for the problem statement given in Example 1.1.

Solution

```
BEGIN
DEFINE: Integer num, i
DISPLAY: "Enter a number: "
READ: num
FOR: i = 2 to num-1
    IF: num%i=0
        DISPLAY: "'num' is not a prime number"
        BREAK
    END IF
END FOR
IF: i=num
    DISPLAY: "'num' is a prime number"
END IF
END
```

Fig. 1.45 Pseudocode to find out whether a given number is prime or not

EXAMPLE 1.12 Write the pseudocode for the problem statement given in Example 1.2.

Solution

```
BEGIN
DEFINE: Integer marks1, marks2, marks3
DEFINE: Real average
DISPLAY: "Enter the marks in three subjects: "
READ: marks1, marks2, marks3
COMPUTE: average = (marks1 + marks2 + marks3)/3
DISPLAY: "The average value of marks is 'average'"
END
```

Fig. 1.46 Pseudocode to find the average of marks obtained by a student

EXAMPLE 1.13 Write the pseudocode for the problem statement given in Example 1.3.

Solution

```
BEGIN
DEFINE: Integer year
DISPLAY: "Enter the year value: "
READ: year
IF: year%4=0
    DISPLAY: "'year' is a leap year"
ELSE
    DISPLAY: "'year' is not a leap year"
END IF
END
```

Fig. 1.47 Pseudocode to determine whether the given year is a leap year or not

EXAMPLE 1.14 Write the pseudocode for the problem statement given in Example 1.4.

Solution

```
BEGIN
DEFINE: Integer num
DISPLAY: "Enter a number: "
READ: num
IF: num%2=0
    DISPLAY: "'num' is an even number"
ELSE
    DISPLAY: "'num' is an odd number"
END IF
END
```

Fig. 1.48 Pseudocode to find out whether a given number is even or odd

EXAMPLE 1.15 Write the pseudocode for the problem statement given in Example 1.5.

Solution

```
BEGIN
DEFINE: String str
DEFINE: Character chk
```

(Contd.)

1.40 Computer Programming

```
DEFINE: Integer left, right, len
SET: chk = 't'
DISPLAY: "Enter a string: "
READ: str
COMPUTE: len = strlen(str)
SET: left = 0
SET: right = len-1
REPEAT
    IF: str(left)=str(right)
        CONTINUE
    ELSE
        SET: chk = 'f'
    END IF
    COMPUTE: left = left + 1
    COMPUTE: right = right - 1
UNTIL: left<right AND chk='t'
IF: chk='t'
    DISPLAY: "'str' is a palindrome string"
ELSE
    DISPLAY: "'str' is not a palindrome string"
END IF
END
```

Fig. 1.49 Pseudocode to determine whether a given string is a palindrome or not

1.12 PROBLEM-SOLVING EXAMPLES


EXAMPLE 1.16 Design and develop the solution for finding the roots of a quadratic equation.

Solution

Algorithm

```
Step 1 - Start
Step 2 - Accept three numbers (a, b, c) from the user for the quadratic equation  $ax^2 + bx + c$ 
Step 3 - Calculate  $root1 = ((-1)*b + \sqrt{b*b - 4*a*c}) / 2*a$ 
Step 4 - Calculate  $root2 = ((-1)*b - \sqrt{b*b - 4*a*c}) / 2*a$ 
Step 5 - Display the computed roots of the quadratic equation
Step 6 - Stop
```

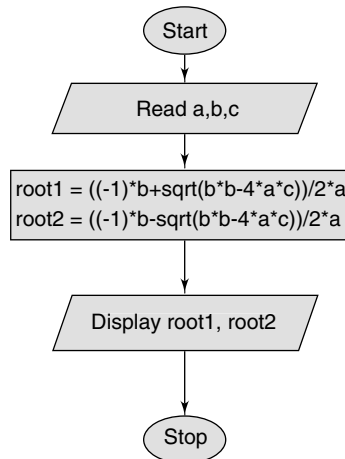Fig. 1.50 Algorithm for finding the roots of a quadratic equation

Flowchart**Fig. 1.51** Flowchart for finding the roots of a quadratic equation**Pseudocode**

```

BEGIN
DEFINE: Integer a, b, c
DEFINE: Real root1, root2
DISPLAY: "Enter the values of a, b and c for the quadratic equation ax2 + bx + c: "
READ: a, b, c
COMPUTE: root1=((-1)*b+sqrt(b*b-4*a*c))/2*a
COMPUTE: root2=((-1)*b-sqrt(b*b-4*a*c))/2*a
DISPLAY: "The roots of the quadratic equation are 'root1' and 'root2'"
END

```

Program

```

#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    int a,b,c;
    float root1,root2; /*Declaration of variables to store root values*/
    clrscr();
    printf("\nEnter the value a, b and c for the quadratic equation axx+bx+c: ");
    scanf("%d %d %d",&a, &b, &c); /*Reading values of a, b and c*/
    root1=((-1)*b+sqrt(b*b-4*a*c))/2*a; /*Computing quadratic root1*/
    root2=((-1)*b-sqrt(b*b-4*a*c))/2*a; /*Computing quadratic root2*/
    printf("\n\nThe roots of the quadratic equation are: %.2f %.2f",root1, root2); /*Displaying resultant roots*/
}

```

(Contd.)

1.42 Computer Programming

```
getch();  
}
```

Output

Enter the value a, b and c for the quadratic equation ax^2+bx+c : 1

-7

12

The roots of the quadratic equation are: 4.00 3.00

Fig. 1.52 Program to find the roots of a quadratic equation


EXAMPLE 1.17 Design and develop the solution for determining whether there is profit or loss during the selling of an item.

Solution

Algorithm

Step 1 - Start
Step 2 - Accept the cost price and selling price of an item from the user (cp, sp)
Step 3 - If $sp > cp$ then goto step 4 else goto step 5
Step 4 - Display "There is a profit of (sp-cp)" and goto Step 8
Step 5 - If $cp > sp$ then goto step 6 else goto step 7
Step 6 - Display "There is a loss of (cp-sp)"
Step 7 - Display "No profit no loss!"
Step 8 - Stop

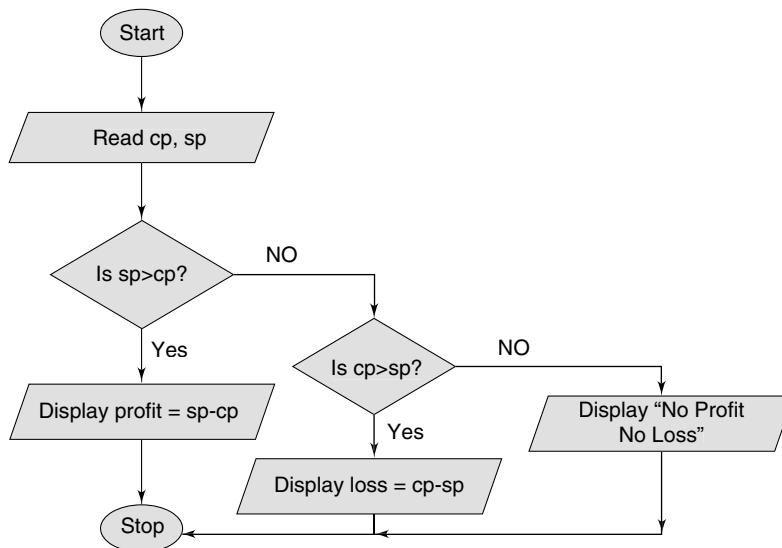Flowchart



Pseudocode

```

BEGIN
DEFINE: Long Integer cp, sp
DISPLAY: "Enter the cost price and selling price of an item: "
READ: cp, sp
IF: sp>cp
    DISPLAY: "There is a profit of 'sp-cp'"
ELSE
    IF: cp>sp
        DISPLAY: "There is a loss of 'cp-sp'"
    ELSE
        DISPLAY: "No profit no loss!"
    END IF
END IF
END

```

Program

```

#include <stdio.h>
#include <conio.h>

void main()
{
    long cp, sp;
    clrscr();
    printf("\nEnter the cost price and selling price of an item: ");
    scanf("%ld %ld",&cp, &sp); /*Reading CP and SP*/
    if(sp>cp) /*Checking condition of profit*/
        printf("\n\nThere is a profit of %ld units", sp-cp);
    else if(sp<cp) /*Checking condition of loss*/
        printf("\n\nThere is a loss of %ld units", cp-sp);
    else
        printf("\n\nNo Profit No Loss!");
    getch();
}

```

Output

```

Enter the cost price and selling price of an item: 24
30

```

```

There is a profit of 6 units

```

Fig. 1.53 Solution for calculating profit and loss

EXAMPLE 1.18	Design and develop the solution for finding the area of a circle.
---------------------	---

Solution**Algorithm**

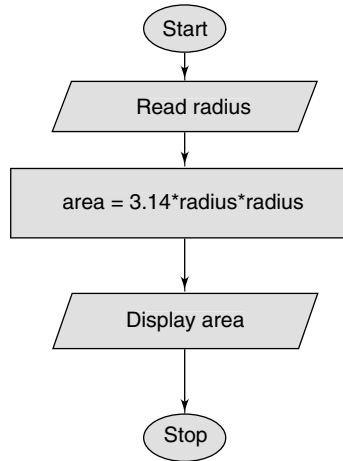
```

Step 1 - Start
Step 2 - Accept the radius of the circle from the user (radius)
Step 3 - Calculate area of the circle using formula area = 3.14 * radius * radius
Step 4 - Display the computed area of the circle
Step 5 - Stop

```

1.44 Computer Programming

Flowchart



Pseudocode

```
BEGIN
DEFINE: Real radius, area
DISPLAY: "Enter the radius of the circle: "
READ: radius
COMPUTE: area = 3.14*radius*radius
DISPLAY: "The area of the circle is 'area'"
END
```

Program

```
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    float radius, area;
    clrscr();
    printf("\nEnter the radius of the circle: ");
    scanf("%f",&radius); /*Reading value of radius*/
    area=3.14*radius*radius; /*Computing area of the circle*/
    printf("\n\nThe area of the circle having radius of %.2f is %.2f",radius, area); /*Displaying
result*/
    getch();
}
```

Output

Enter the radius of the circle: 4

The area of the circle having radius of 4.00 is 50.24

Fig. 1.54 Solution for calculating area of a circle

PART B

Basics of C

1.13 HISTORY OF C

‘C’ seems a strange name for a programming language. But this strange sounding language is one of the most popular computer languages today because it is a structured, high-level, machine independent language. It allows software developers to develop programs without worrying about the hardware platforms where they will be implemented.

The root of all modern languages is ALGOL, introduced in the early 1960s. ALGOL was the first computer language to use a block structure. Although it never became popular in USA, it was widely used in Europe. ALGOL gave the concept of structured programming to the computer science community. Computer scientists like Corrado Bohm, Guiseppe Jacopini and Edsger Dijkstra popularized this concept during 1960s. Subsequently, several languages were announced.

In 1967, Martin Richards developed a language called BCPL (Basic Combined Programming Language) primarily for writing system software. In 1970, Ken Thompson created a language using many features of BCPL and called it simply B. B was used to create early versions of UNIX operating system at Bell Laboratories. Both BCPL and B were “typeless” system programming languages.

C was evolved from ALGOL, BCPL and B by Dennis Ritchie at the Bell Laboratories in 1972. C uses many concepts from these languages and added the concept of data types and other powerful features. Since it was developed along with the UNIX operating system, it is strongly associated with UNIX. This operating system, which was also developed at Bell Laboratories, was coded almost entirely in C. UNIX is one of the most popular network operating systems in use today and the heart of the Internet data superhighway.

For many years, C was used mainly in academic environments, but eventually with the release of many C compilers for commercial use and the increasing popularity of UNIX, it began to gain widespread support among computer professionals. Today, C is running under a variety of operating system and hardware platforms.

During 1970s, C had evolved into what is now known as “*traditional C*”. The language became more popular after publication of the book ‘*The C Programming Language*’ by Brian Kerningham and Dennis Ritchie in 1978. The book was so popular that the language came to be known as “K&R C” among the programming community. The rapid growth of C led to the development of different versions of the language that were similar but often incompatible. This posed a serious problem for system developers.

To assure that the C language remains standard, in 1983, American National Standards Institute (ANSI) appointed a technical committee to define a standard for C. The committee approved a version of C in December 1989 which is now known as ANSI C. It was then approved by the International Standards Organization (ISO) in 1990. This version of C is also referred to as C89.

During 1990’s, C++, a language entirely based on C, underwent a number of improvements and changes and became an ANSI/ISO approved language in November 1997. C++ added several new features to C to make it not only a true object-oriented language but also a more versatile language. During the same period, Sun Microsystems of USA created a new language **Java** modelled on C and C++.

All popular computer languages are dynamic in nature. They continue to improve their power and scope by incorporating new features and C is no exception. Although C++ and Java were evolved out of C, the standardization committee of C felt that a few features of C++/Java, if added to C, would enhance the

usefulness of the language. The result was the 1999 standard for C. This version is usually referred to as C99. The history and development of C is illustrated in Fig. 1.55

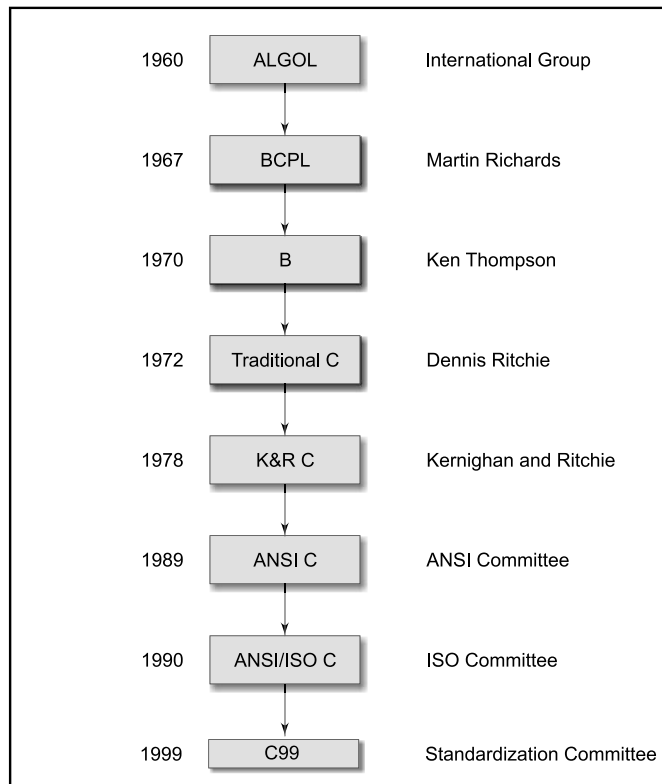


Fig. 1.55 History of ANSI C

Although C99 is an improved version, still many commonly available compilers do not support all of the new features incorporated in C99. We, therefore, discuss all the new features added by C99 in an appendix separately so that the readers who are interested can quickly refer to the new material and use them wherever possible.

1.14 IMPORTANCE OF C

The increasing popularity of C is probably due to its many desirable qualities. It is a robust language whose rich set of built-in functions and operators can be used to write any complex program. The C compiler combines the capabilities of an assembly language with the features of a high-level language and therefore it is well suited for writing both system software and business packages. In fact, many of the C compilers available in the market are written in C.

Programs written in C are efficient and fast. This is due to its variety of data types and powerful operators. It is many times faster than BASIC. For example, a program to increment a variable from 0 to 15000 takes about one second in C while it takes more than 50 seconds in an interpreter BASIC.

There are only 32 keywords in ANSI C and its strength lies in its built-in functions. Several standard functions are available which can be used for developing programs.

C is highly portable. This means that C programs written for one computer can be run on another with little or no modification. Portability is important if we plan to use a new computer with a different operating system.

C language is well suited for structured programming, thus requiring the user to think of a problem in terms of function modules or blocks. A proper collection of these modules would make a complete program. This modular structure makes program debugging, testing and maintenance easier.

Another important feature of C is its ability to extend itself. A C program is basically a collection of functions that are supported by the C library. We can continuously add our own functions to C library. With the availability of a large number of functions, the programming task becomes simple.

Before discussing specific features of C, we shall look at some sample C programs, and analyze and understand how they work.

1.15 SAMPLE PROGRAM 1: PRINTING A MESSAGE

Consider a very simple program given in Fig. 1.56.

This program when executed will produce the following output:

I see, I remember

Let us have a close look at the program. The first line informs the system that the name of the program is **main** and the execution begins at this line. The **main()** is a special function used by the C system to tell the computer where the program starts. Every program must have *exactly one main* function. If we use more than one **main** function, the compiler cannot understand which one marks the beginning of the program.

The empty pair of parentheses immediately following **main** indicates that the function **main** has no *arguments* (or parameters). The concept of arguments will be discussed in detail later when we discuss functions (in Chapter 12).

The opening brace “{” in the second line marks the beginning of the function **main** and the closing brace “}” in the last line indicates the end of the function. In this case, the closing brace also marks the end of the program. All the statements between these two braces form the *function body*. The function body contains a set of instructions to perform the given task.

In this case, the function body contains three statements out of which only the **printf** line is an executable statement. The lines beginning with **/*** and ending with ***/** are known as *comment* lines. These are used in a program to enhance its readability and understanding. Comment lines are not executable statements and therefore anything between **/*** and ***/** is ignored by the compiler. In general, a comment can be inserted wherever blank spaces can occur—at the beginning, middle or end of a line—“but never in the middle of a word”.

Although comments can appear anywhere, they cannot be nested in C. That means, we cannot have comments inside comments. Once the compiler finds an opening token, it ignores everything until it finds a closing token. The comment line

/* = = = /* = = = */ = = = */

is not valid and therefore results in an error.

Since comments do not affect the execution speed and the size of a compiled program, we should use them liberally in our programs. They help the programmers and other users in understanding the various functions

```
main( )
{
/*.....printing begins.....*/
    printf("I see, I remember");
/*.....printing ends.....*/
}
```

Fig. 1.56 A program to print one line of text

1.48 Computer Programming

and operations of a program and serve as an aid to debugging and testing. We shall see the use of comment lines more in the examples that follow.

Let us now look at the **printf()** function, the only executable statement of the program.

```
printf("I see, I remember");
```

printf is a predefined standard C function for printing output. *Predefined* means that it is a function that has already been written and compiled, and linked together with our program at the time of linking. The concepts of compilation and linking are explained later in this chapter. The **printf** function causes everything between the starting and the ending quotation marks to be printed out. In this case, the output will be:

```
I see, I remember
```

Note that the print line ends with a semicolon. *Every statement in C should end with a semicolon (;) mark.*

Suppose we want to print the above quotation in two lines as

```
I see,  
I remember!
```

This can be achieved by adding another **printf** function as shown below:

```
printf("I see, \n");  
printf("I remember !");
```

The information contained between the parentheses is called the *argument* of the function. This argument of the first **printf** function is “I see, \n” and the second is “I remember !”. These arguments are simply strings of characters to be printed out.

Notice that the argument of the first **printf** contains a combination of two characters \ and n at the end of the string. This combination is collectively called the *newline* character. A newline character instructs the computer to go to the next (new) line. It is similar in concept to the carriage return key on a typewriter. After printing the character comma (,) the presence of the newline character \n causes the string “I remember !” to be printed on the next line. No space is allowed between \ and n.

If we omit the newline character from the first **printf** statement, then the output will again be a single line as shown below.

```
I see, I remember !
```

This is similar to the output of the program in Fig. 1.56. However, note that there is no space between, and I.

It is also possible to produce two or more lines of output by one **printf** statement with the use of newline character at appropriate places. For example, the statement

```
printf("I see,\n I remember !");
```

will output

```
I see,  
I remember !
```

while the statement

```
printf( "I\n.. see,\n... .. I\n... .. remember !");
```

will print out

```
I  
.. see,  
... .. I  
... .. remember !
```



NOTE: Some authors recommend the inclusion of the statement

#include <stdio.h>

at the beginning of all programs that use any input/output library functions. However, this is not necessary for the functions **printf** and **scanf** which have been defined as a part of the C language. See Chapter 5 for more on input and output functions.

Before we proceed to discuss further examples, we must note one important point. C does make a distinction between *uppercase* and *lowercase* letters. For example, **printf** and **PRINTF** are not the same. In C, everything is written in lowercase letters. However, uppercase letters are used for symbolic names representing constants. We may also use uppercase letters in output strings like “I SEE” and “I REMEMBER”

The above example that printed **I see, I remember** is one of the simplest programs. Figure 1.57 highlights the general format of such simple programs. All C programs need a **main** function.



Fig. 1.57 Format of simple C programs

The main Function

The main is a part of every C program. C permits different forms of main statement. Following forms are allowed.

- main()
- int main()
- void main()
- main(void)
- void main(void)
- int main(void)

The empty pair of parentheses indicates that the function has no arguments. This may be explicitly indicated by using the keyword **void** inside the parentheses. We may also specify the keyword **int** or **void** before the word **main**. The keyword **void** means that the function does not return any information to the operating system and **int** means that the function returns an integer value to the operating system. When **int** is specified, the last statement in the program must be “return 0”. For the sake of simplicity, we use the first form in our programs.

1.16 SAMPLE PROGRAM 2: ADDING TWO NUMBERS

Consider another program, which performs addition on two numbers and displays the result. The complete program is shown in Fig. 1.58.

```

/* Program ADDITION                                line-1 */
/* Written by EBG                                   line-2 */
main()                                              /* line-3 */
{                                                  /* line-4 */

```

(Contd.)

```

    int number;                                /* line-5 */
    float amount;                              /* line-6 */
                                              /* line-7 */
    number = 100;                              /* line-8 */
                                              /* line-9 */
    amount = 30.75 + 75.35;                    /* line-10 */
    printf("%d\n", number);                    /* line-11 */
    printf("%5.2f", amount);                   /* line-12 */
}                                              /* line-13 */

```

Fig. 1.58 Program to add two numbers

This program when executed will produce the following output:

```

100
106.10

```

The first two lines of the program are comment lines. It is a good practice to use comment lines in the beginning to give information such as name of the program, author, date, etc. Comment characters are also used in other lines to indicate line numbers.

The words **number** and **amount** are *variable names* that are used to store numeric data. The numeric data may be either in *integer* form or in *real* form. In C, *all variables should be declared* to tell the compiler what the *variable names* are and what *type of data* they hold. The variables must be declared before they are used. In lines 5 and 6, the declarations

```

int number;
float amount;

```

tell the compiler that **number** is an integer (**int**) and **amount** is a floating (**float**) point number. Declaration statements must appear at the beginning of the functions as shown in Fig. 1.58. All declaration statements end with a semicolon; C supports many other data types and they are discussed in detail in Chapter 1.

The words such as **int** and **float** are called the *keywords* and cannot be used as *variable* names. A list of keywords is given in Chapter 1.

Data is stored in a variable by *assigning* a data value to it. This is done in lines 8 and 10. In line-8, an integer value 100 is assigned to the integer variable **number** and in line-10, the result of addition of two real numbers 30.75 and 75.35 is assigned to the floating point variable **amount**. The statements

```

number = 100;
amount = 30.75 + 75.35;

```

are called the *assignment* statements. Every assignment statement must have a semicolon at the end.

The next statement is an output statement that prints the value of **number**. The print statement

```
printf("%d\n", number);
```

contains two arguments. The first argument “%d” tells the compiler that the value of the second argument **number** should be printed as a *decimal integer*. Note that these arguments are separated by a comma. The newline character \n causes the next output to appear on a new line.

The last statement of the program

```
printf("%5.2f", amount);
```

prints out the value of **amount** in floating point format. The format specification %5.2f tells the compiler that the output must be in *floating point*, with five places in all and two places to the right of the decimal point.

1.17 SAMPLE PROGRAM 3: INTEREST CALCULATION

The program in Fig. 1.59 calculates the value of money at the end of each year of investment, assuming an interest rate of 11 percent and prints the year, and the corresponding amount, in two columns. The output is shown in Fig. 1.60 for a period of 10 years with an initial investment of 5000.00. The program uses the following formula:

$$\text{Value at the end of year} = \text{Value at start of year} (1 + \text{interest rate})$$

In the program, the variable **value** represents the value of money at the end of the year while **amount** represents the value of money at the start of the year. The statement

amount = value ;

makes the value at the end of the *current* year as the value at start of the *next* year.

```

/*————— INVESTMENT PROBLEM —————*/
#define PERIOD 10
#define PRINCIPAL 5000.00
/*————— MAIN PROGRAM BEGINS —————*/
main()
{ /*————— DECLARATION STATEMENTS —————*/
    int year;
    float amount, value, inrate;
/*————— ASSIGNMENT STATEMENTS —————*/
    amount = PRINCIPAL;
    inrate = 0.11;
    year = 0;
/*————— COMPUTATION STATEMENTS —————*/
/*————— COMPUTATION USING While LOOP —————*/
    while(year <= PERIOD)
    { printf("%2d%8.2f\n",year, amount);
        value = amount + inrate * amount;
        year = year + 1;
        amount = value;
    }
/*————— while LOOP ENDS —————*/
}
/*————— PROGRAM ENDS —————*/

```

Fig. 1.59 Program for investment problem

Let us consider the new features introduced in this program. The second and third lines begin with **#define** instructions. A **#define** instruction defines value to a *symbolic constant* for use in the program. Whenever a symbolic name is encountered, the compiler substitutes the value associated with the name automatically. To change the value, we have to simply change the definition. In this example, we have defined two symbolic constants **PERIOD** and **PRINCIPAL** and assigned values 10 and 5000.00 respectively. These values remain constant throughout the execution of the program.

0	5000.00
1	5550.00
2	6160.50
3	6838.15

(Contd.)

4	7590.35
5	8425.29
6	9352.07
7	10380.00
8	11522.69
9	12790.00
10	14197.11

Fig. 1.60 Output of the investment program

The #define Directive

A **#define** is a preprocessor compiler directive and not a statement. Therefore **#define** lines should not end with a semicolon. Symbolic constants are generally written in uppercase so that they are easily distinguished from lowercase variable names. **#define** instructions are usually placed at the beginning before the **main()** function. Symbolic constants are not declared in declaration section.

We must note that the defined constants are not variables. We may not change their values within the program by using an assignment statement. For example, the statement

```
PRINCIPAL = 10000.00;
```

is illegal.

The declaration section declares **year** as integer and **amount**, **value** and **inrate** as floating point numbers. Note all the floating-point variables are declared in one statement. They can also be declared as

```
float amount;
float value;
float inrate;
```

When two or more variables are declared in one statement, they are separated by a comma.

All computations and printing are accomplished in a **while** loop. **while** is a mechanism for evaluating repeatedly a statement or a group of statements. In this case as long as the value of **year** is less than or equal to the value of **PERIOD**, the four statements that follow **while** are executed. Note that these four statements are grouped by braces. We exit the loop when **year** becomes greater than **PERIOD**.

C supports the basic four arithmetic operators (**-**, **+**, *****, **/**) along with several others.

1.18 SAMPLE PROGRAM 4: USE OF SUBROUTINES

So far, we have used only **printf** function that has been provided for us by the C system. The program shown in Fig. 1.61 uses a user-defined function. A function defined by the user is equivalent to a subroutine in FORTRAN or subprogram in BASIC.

Figure 1.61 presents a very simple program that uses a **mul ()** function. The program will print the following output:

Multiplication of 5 and 10 is 50

```
/*----- PROGRAM USING FUNCTION -----*/
int mul (int a, int b); /*----- DECLARATION -----*/
/*----- MAIN PROGRAM BEGINS -----*/
main ()
{
    int a, b, c;
```

(Contd.)


```

        a = 5;
        b = 10;
        c = mul (a,b);

        printf ("multiplication of %d and %d is %d",a,b,c);
    }
/* -----          MAIN PROGRAM ENDS
                        MUL() FUNCTION STARTS -----*/
int mul (int x, int y)
int p;
{
    p = x*y;
    return(p);
}
/* -----          MUL () FUNCTION ENDS -----*/

```

Fig. 1.61 A program using a user-defined function

The **mul ()** function multiplies the values of **x** and **y** and the result is returned to the **main ()** function when it is called in the statement

```
c = mul (a, b);
```

The **mul ()** has two *arguments* **x** and **y** that are declared as integers. The values of **a** and **b** are passed on to **x** and **y** respectively when the function **mul ()** is called. User-defined functions are considered in detail in Chapter 9.

1.19 SAMPLE PROGRAM 5: USE OF MATH FUNCTIONS

We often use standard mathematical functions such as cos, sin, exp, etc. We shall see now the use of a mathematical function in a program. The standard mathematical functions are defined and kept as a part of C **math library**. If we want to use any of these mathematical functions, we must add an **#include** instruction in the program. Like **#define**, it is also a compiler directive that instructs the compiler to link the specified mathematical functions from the library. The instruction is of the form

```
#include <math.h>
```

math.h is the filename containing the required function. Figure 1.62 illustrates the use of cosine function. The program calculates cosine values for angles 0, 10, 20.....180 and prints out the results with headings.

```

/*----- PROGRAM USING COSINE FUNCTION ----- */
#include <math.h>
#define PI 3.1416
#define MAX 180
main ( )
{
    int angle;
    float x,y;
    angle = 0;
    printf(" Angle   Cos(angle)\n\n");
    while(angle <= MAX)

```

(Contd.)

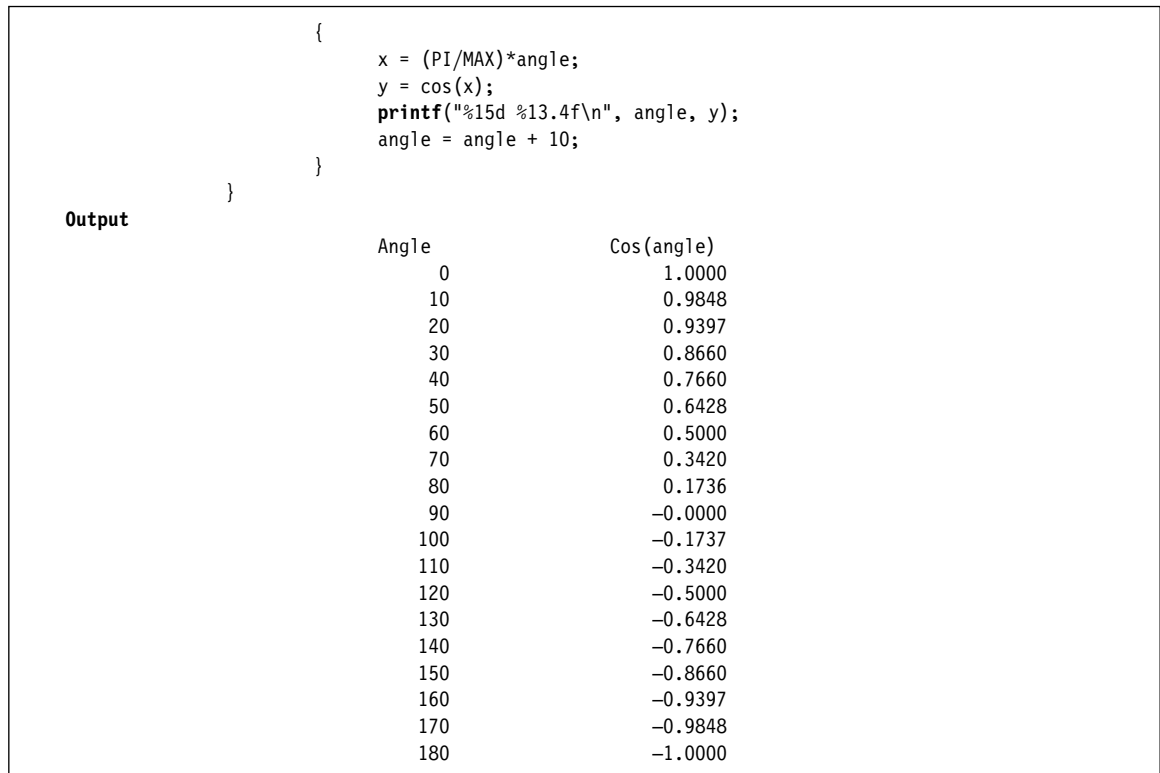


Fig. 1.62 Program using a math function

Another **#include** instruction that is often required is

```
#include <stdio.h>
```

stdio.h refers to the *standard* I/O header file containing standard input and output functions

The #include Directive

As mentioned earlier, C programs are divided into modules or functions. Some functions are written by users, like us, and many others are stored in the C library. Library functions are grouped category-wise and stored in different files known as *header files*. If we want to access the functions stored in the library, it is necessary to tell the compiler about the files to be accessed.

This is achieved by using the preprocessor directive **#include** as follows:

```
#include <filename>
```

filename is the name of the library file that contains the required function definition. Preprocessor directives are placed at the beginning of a program.

1.20 BASIC STRUCTURE OF C PROGRAMS

The examples discussed so far illustrate that a C program can be viewed as a group of building blocks called *functions*. A function is a subroutine that may include one or more *statements* designed to perform

a *specific task*. To write a C program, we first create functions and then put them together. A C program may contain one or more sections as shown in Fig. 1.63.

The documentation section consists of a set of comment lines giving the name of the program, the author and other details, which the programmer would like to use later. The link section provides instructions to the compiler to link functions from the system library. The definition section defines all symbolic constants.

There are some variables that are used in more than one function. Such variables are called *global* variables and are declared in the *global* declaration section that is outside of all the functions. This section also declares all the user-defined functions.

Every C program must have one **main()** function section. This section contains two parts, declaration part and executable part. The declaration part declares all the variables used in the executable part. There is at least one statement in the executable part. These two parts must appear between the opening and the closing braces. The program execution begins at the opening brace and ends at the closing brace. The closing brace of the main function section is the logical end of the program. All statements in the declaration and executable parts end with a semicolon(;).

The subprogram section contains all the user-defined functions that are called in the **main** function. User-defined functions are generally placed immediately after the **main** function, although they may appear in any order.

All sections, except the **main** function section may be absent when they are not required.

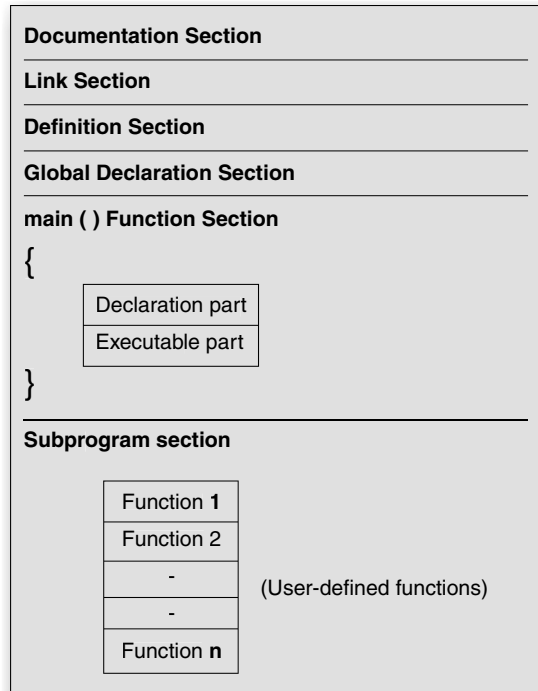


Fig. 1.63 An overview of a C program

1.21 PROGRAMMING STYLE

Unlike some other programming languages (COBOL, FORTRAN, etc.,) C is a *free-form* language. That is, the C compiler does not care, where on the line we begin typing. While this may be a licence for bad programming, we should try to use this fact to our advantage in developing readable programs. Although several alternative styles are possible, we should select one style and use it with total consistency.

First of all, we must develop the habit of writing programs in lowercase letters. C program statements are written in lowercase letters. Uppercase letters are used only for symbolic constants.

Braces, group program statements together and mark the beginning and the end of functions. A proper indentation of braces and statements would make a program easier to read and debug. Note how the braces are aligned and the statements are indented in the program of Fig. 1.59.

Since C is a free-form language, we can group statements together on one line. The statements

```

a = b;
x = y + 1;
z = a + x;
  
```

can be written on one line as

```
a = b; x = y+1; z = a+x;
```

The program

```
main( )
{
    printf("hello C");
}
```

may be written in one line like

```
main( ) {printf("Hello C");};
```

However, this style makes the program more difficult to understand and should not be used. In this book, each statement is written on a separate line.

The generous use of comments inside a program cannot be overemphasized. Judiciously inserted comments not only increase the readability but also help to understand the program logic. This is very important for debugging and testing the program.

1.22 PROGRAM DEVELOPMENT STEPS

Executing a program written in C involves a series of steps. These are:

1. Creating the program;
2. Compiling the program;
3. Linking the program with functions that are needed from the C library; and
4. Executing the program.

Figure 1.64 illustrates the process of creating, compiling and executing a C program. Although these steps remain the same irrespective of the *operating system*, system commands for implementing the steps and conventions for naming *files* may differ on different systems.

An operating system is a program that controls the entire operation of a computer system. All input/output operations are channeled through the operating system. The operating system, which is an interface between the hardware and the user, handles the execution of user programs.

The two most popular operating systems today are UNIX (for minicomputers) and MS-DOS (for microcomputers). We shall discuss briefly the procedure to be followed in executing C programs under both these operating systems in the following sections.

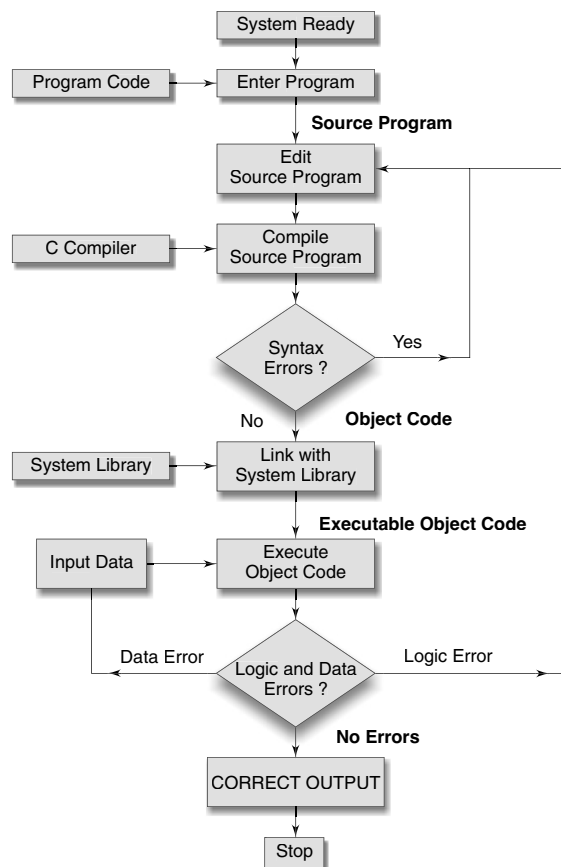


Fig. 1.64 Process of compiling and running a C program

1.23 UNIX SYSTEM

1.23.1 Creating the Program

Once we load the UNIX operating system into the memory, the computer is ready to receive program. The program must be entered into a file. The file name can consist of letters, digits and special characters, followed by a dot and a letter **c**. Examples of valid file names are:

```
hello.c
program.c
ebg1.c
```

The file is created with the help of a *text editor*, either **ed** or **vi**. The command for calling the editor and creating the file is

```
ed filename
```

If the file existed before, it is loaded. If it does not yet exist, the file has to be created so that it is ready to receive the new program. Any corrections in the program are done under the editor. (The name of your system's editor may be different. Check your system manual.)

When the editing is over, the file is saved on disk. It can then be referenced any time later by its file name. The program that is entered into the file is known as the *source program*, since it represents the original form of the program.

1.23.2 Compiling and Linking

Let us assume that the source program has been created in a file named *ebg1.c*. Now the program is ready for compilation. The compilation command to achieve this task under UNIX is

```
cc ebg1.c
```

The source program instructions are now translated into a form that is suitable for execution by the computer. The translation is done after examining each instruction for its correctness. If everything is alright, the compilation proceeds silently and the translated program is stored on another file with the name *ebg1.o*. This program is known as *object code*.

Linking is the process of putting together other program files and functions that are required by the program. For example, if the program is using **exp()** function, then the object code of this function should be brought from the **math library** of the system and linked to the main program. Under UNIX, the linking is automatically done (if no errors are detected) when the **cc** command is used.

If any mistakes in the *syntax* and *semantics* of the language are discovered, they are listed out and the compilation process ends right there. The errors should be corrected in the source program with the help of the editor and the compilation is done again.

The compiled and linked program is called the *executable object code* and is stored automatically in another file named **a.out**.

Note that some systems use different compilation command for linking mathematical functions.

```
cc filename - lm
```

is the command under UNIPLUS SYSTEM V operating system.

1.23.3 Executing the Program

Execution is a simple task. The command

```
a.out
```

1.58 Computer Programming

would load the executable object code into the computer memory and execute the instructions. During execution, the program may request for some data to be entered through the keyboard. Sometimes the program does not produce the desired results. Perhaps, something is wrong with the program *logic* or *data*. Then it would be necessary to correct the source program or the data. In case the source program is modified, the entire process of compiling, linking and executing the program should be repeated.

1.23.4 Creating Our Own Executable File

Note that the linker always assigns the same name **a.out**. When we compile another program, this file will be overwritten by the executable object code of the new program. If we want to prevent from happening, we should rename the file immediately by using the command.

```
mv a.out name
```

We may also achieve this by specifying an option in the **cc** command as follows:

```
cc -o name source-file
```

This will store the executable object code in the file name and prevent the old file **a.out** from being destroyed.

1.23.5 Multiple Source Files

To compile and link multiple source program files, we must append all the files names to the **cc** command.

```
cc filename-1.c ... filename-n.c
```

These files will be separately compiled into object files called

filename-i.o

and then linked to produce an executable program file **a.out** as shown in Fig. 1.65.

It is also possible to compile each file separately and link them later. For example, the commands

```
cc -c mod1.c
cc -c mod2.c
```

will compile the source files *mod1.c* and *mod2.c* into objects files *mod1.o* and *mod2.o*. They can be linked together by the command

```
cc mod1.o mod2.o
```

we may also combine the source files and object files as follows:

```
cc mod1.c mod2.o
```

Only *mod1.c* is compiled and then linked with the object file *mod2.o*. This approach is useful when one of the multiple source files need to be changed and recompiled or an already existing object files is to be used along with the program to be compiled.

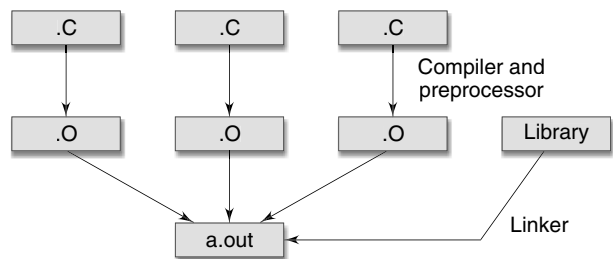


Fig. 1.65 Compilation of multiple files

1.24 MS-DOS SYSTEM

The program can be created using any word processing software in non-document mode. The file name should end with the characters ".c" like **program.c**, **pay.c**, etc. Then the command

```
MSC pay.c
```

under MS-DOS operating system would load the program stored in the file **pay.c** and generate the **object code**. This code is stored in another file under name **pay.obj**. In case any language errors are found, the compilation is not completed. The program should then be corrected and compiled again.

The linking is done by the command

```
LINK pay.obj
```

which generates the **executable code** with the filename **pay.exe**. Now the command

```
pay
```

would execute the program and give the results.

1.25 INTRODUCTION TO CONSTANTS, VARIABLES, AND DATA TYPES

A programming language is designed to help process certain kinds of *data* consisting of numbers, characters and strings and to provide useful output known as *information*. The task of processing of data is accomplished by executing a sequence of precise instructions called a *program*. These instructions are formed using certain symbols and words according to some rigid rules known as *syntax rules* (or *grammar*). Every program instruction must conform precisely to the syntax rules of the language.

Like any other language, C has its own vocabulary and grammar. In this chapter, we will discuss the concepts of constants and variables and their types as they relate to C programming language.

1.26 CHARACTER SET

The characters that can be used to form words, numbers and expressions depend upon the computer on which the program is run. However, a subset of characters is available that can be used on most personal, micro, mini and mainframe computers. The characters in C are grouped into the following categories:

1. Letters
2. Digits
3. Special characters
4. White spaces

The entire character set is given in Table 1.3.

The compiler ignores white spaces unless they are a part of a string constant. White spaces may be used to separate words, but are prohibited between the characters of keywords and identifiers.

Trigraph Characters

Many non-English keyboards do not support all the characters mentioned in Table 1.3. ANSI C introduces the concept of “trigraph” sequences to provide a way to enter certain characters that are not available on some keyboards. Each trigraph sequence consists of three characters (two question marks followed by another character) as shown in Table 1.4. For example, if a keyboard does not support square brackets, we can still use them in a program using the trigraphs `??(` and `??)`.

Table 1.3 C Character Set

<i>Letters</i>	<i>Digits</i>
Uppercase A.....Z	All decimal digits 09
Lowercase a.....z	

Special Characters

, comma	& ampersand
. period	^ caret
; semicolon	* asterisk
: colon	– minus sign
? question mark	+ plus sign
' apostrophe	< opening angle bracket
“ quotation mark	(or less than sign)
! exclamation mark	> closing angle bracket
vertical bar	(or greater than sign)
/ slash	(left parenthesis
\ backslash) right parenthesis
~ tilde	[left bracket
_ under score] right bracket
\$ dollar sign	{ left brace
% percent sign	} right brace
	# number sign

White Spaces

Blank space
Horizontal tab
Carriage return
New line
Form feed

Table 1.4 ANSI C Trigraph Sequences

<i>Trigraph sequence</i>	<i>Translation</i>
??=	# number sign
??([left bracket
??)] right bracket
??<	{ left brace
??>	} right brace
??!	vertical bar
??/	\ back slash
??/	^ caret
??-	~ tilde

1.27 C TOKENS

In a passage of text, individual words and punctuation marks are called *tokens*. Similarly, in a C program the smallest individual units are known as C tokens. C has six types of tokens as shown in Fig. 1.66. C programs are written using these tokens and the syntax of the language.

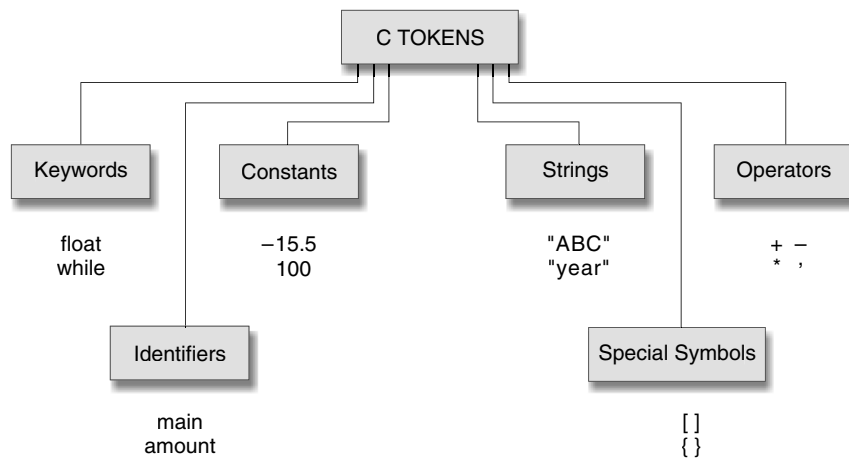


Fig. 1.66 C tokens and examples

1.28 KEYWORDS AND IDENTIFIERS

Every C word is classified as either a *keyword* or an *identifier*. All keywords have fixed meanings and these meanings cannot be changed. Keywords serve as basic building blocks for program statements. The list of all keywords of ANSI C are listed in Table 1.5. All keywords must be written in lowercase. Some compilers may use additional keywords that must be identified from the C manual.



NOTE: C99 adds some more keywords. See the Appendix “C99 Features”.

Table 1.5 ANSI C Keywords

<i>auto</i>	<i>double</i>	<i>int</i>	<i>struct</i>
break	else	long	switch
case	enum	register	typedef
char	extern	return	union
const	float	short	unsigned
continue	for	signed	void
default	goto	sizeof	volatile
do	if	static	while

Identifiers refer to the names of variables, functions and arrays. These are user-defined names and consist of a sequence of letters and digits, with a letter as a first character. Both uppercase and lowercase letters are permitted, although lowercase letters are commonly used. The underscore character is also permitted in identifiers. It is usually used as a link between two words in long identifiers.

Rules for Identifiers

1. First character must be an alphabet (or underscore).
2. Must consist of only letters, digits or underscore.
3. Only first 31 characters are significant.
4. Cannot use a keyword.
5. Must not contain white space.

1.29 CONSTANTS

Constants in C refer to fixed values that do not change during the execution of a program. C supports several types of constants as illustrated in Fig. 1.67.

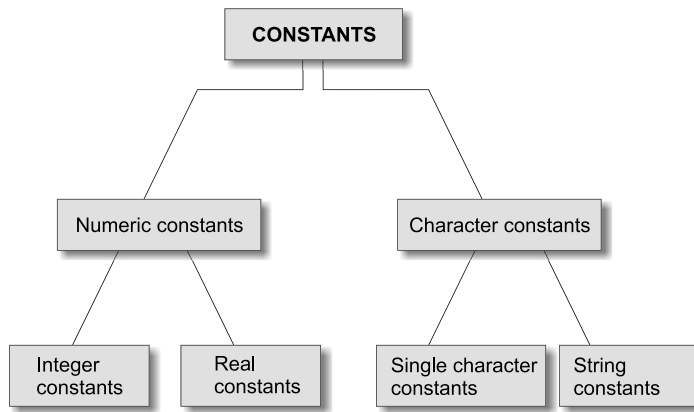


Fig. 1.67 Basic types of C constants

1.29.1 Integer Constants

An *integer* constant refers to a sequence of digits. There are three types of integers, namely, *decimal* integer, *octal* integer and *hexadecimal* integer.

Decimal integers consist of a set of digits, 0 through 9, preceded by an optional – or + sign. Valid examples of decimal integer constants are:

123 – 321 0 654321 +78

Embedded spaces, commas, and non-digit characters are not permitted between digits. For example,

15 750 20,000 \$1000

are illegal numbers.



NOTE: ANSI C supports *unary plus* which was not defined earlier.

An *octal* integer constant consists of any combination of digits from the set 0 through 7, with a leading 0. Some examples of octal integer are:

037 0 0435 0551

A sequence of digits preceded by 0x or 0X is considered as *hexadecimal* integer. They may also include alphabets A through F or a through f. The letter A through F represent the numbers 10 through 15. Following are the examples of valid hex integers:

0X2 0x9F 0Xbcd 0x

We rarely use octal and hexadecimal numbers in programming.

The largest integer value that can be stored is machine-dependent. It is 32767 on 16-bit machines and 2,147,483,647 on 32-bit machines. It is also possible to store larger integer constants on these machines by appending *qualifiers* such as U,L and UL to the constants. Examples:

56789U	or 56789u	(unsigned integer)
987612347UL	or 98761234ul	(unsigned long integer)
9876543L	or 9876543l	(long integer)

The concept of unsigned and long integers are discussed in detail in Section 1.7.

EXAMPLE 1.19 Representation of integer constants on a 16-bit computer.

The program in Fig. 1.68 illustrates the use of integer constants on a 16-bit machine. The output in Fig. 1.68 shows that the integer values larger than 32767 are not properly stored on a 16-bit machine. However, when they are qualified as long integer (by appending L), the values are correctly stored.

Program

```
main()
{
    printf("Integer values\n\n");
    printf("%d %d %d\n", 32767, 32767+1, 32767+10);
    printf("\n");
    printf("Long integer values\n\n");
    printf("%ld %ld %ld\n", 32767L, 32767L+1L, 32767L+10L);
}
```

Output

```
Integer values
32767 -32768 -32759
Long integer values
32767 32768 32777
```

Fig. 1.68 Representation of integer constants on 16-bit machine

1.29.2 Real Constants

Integer numbers are inadequate to represent quantities that vary continuously, such as distances, heights, temperatures, prices, and so on. These quantities are represented by numbers containing fractional parts like 17.548. Such numbers are called *real* (or *floating point*) constants. Further examples of real constants are:

0.0083 -0.75 435.36 +247.0

These numbers are shown in decimal notation, having a whole number followed by a decimal point and the fractional part. It is possible to omit digits before the decimal point, or digits after the decimal point. That is,

215. .95 -.71 +.5

are all valid real numbers.

1.64 Computer Programming

A real number may also be expressed in *exponential* (or *scientific*) notation. For example, the value 215.65 may be written as 2.1565e2 in exponential notation. e2 means multiply by 10². The general form is:

mantissa e exponent

The *mantissa* is either a real number expressed in *decimal notation* or an integer. The *exponent* is an integer number with an optional *plus* or *minus sign*. The letter **e** separating the mantissa and the exponent can be written in either lowercase or uppercase. Since the exponent causes the decimal point to “float”, this notation is said to represent a real number in *floating point form*. Examples of legal floating-point constants are:

0.65e4 12e-2 1.5e+5 3.18E3 -1.2E-1

Embedded white space is not allowed.

Exponential notation is useful for representing numbers that are either very large or very small in magnitude. For example, 7500000000 may be written as 7.5E9 or 75E8. Similarly, -0.000000368 is equivalent to -3.68E-7.

Floating-point constants are normally represented as double-precision quantities. However, the suffixes **f** or **F** may be used to force single-precision and **l** or **L** to extend double precision further.

Some examples of valid and invalid numeric constants are given in Table 1.6.

Table 1.6 Examples of Numeric Constants

<i>Constant</i>	<i>Valid ?</i>	<i>Remarks</i>
698354L	Yes	Represents long integer
25,000	No	Comma is not allowed
+5.0E3	Yes	(ANSI C supports unary plus)
3.5e-5	Yes	
7.1e 4	No	No white space is permitted
-4.5e-2	Yes	
1.5E+2.5	No	Exponent must be an integer
\$255	No	\$ symbol is not permitted
0X7B	Yes	Hexadecimal integer

1.29.3 Single Character Constants

A single character constant (or simply character constant) contains a single character enclosed within a pair of *single* quote marks. Example of character constants are:

'5' 'X' ';' ' '

Note that the character constant '5' is not the same as the *number* 5. The last constant is a blank space.

Character constants have integer values known as ASCII values. For example, the statement

```
printf("%d", 'a');
```

would print the number 97, the ASCII value of the letter a. Similarly, the statement

```
printf("%c", '97');
```

would output the letter 'a'. ASCII values for all characters are given in Appendix II.

Since each character constant represents an integer value, it is also possible to perform arithmetic operations on character constants. They are discussed in Chapter 9.

1.29.4 String Constants

A string constant is a sequence of characters enclosed in *double* quotes. The characters may be letters, numbers, special characters and blank space. Examples are:

“Hello!” “1987” “WELL DONE” “?...!” “5+3” “X”

Remember that a character constant (e.g., ‘X’) is not equivalent to the single character string constant (e.g., “X”). Further, a single character string constant does not have an equivalent integer value while a character constant has an integer value. Character strings are often used in programs to build meaningful programs. Manipulation of character strings are considered in detail in Chapter 11.

1.29.5 Backslash Character Constants

C supports some special backslash character constants that are used in output functions. For example, the symbol ‘\n’ stands for newline character. A list of such backslash character constants is given in Table 1.7. Note that each one of them represents one character, although they consist of two characters. These characters combinations are known as *escape sequences*.

Table 1.7 Backslash Character Constants

<i>Constant</i>	<i>Meaning</i>
‘\a’	audible alert (bell)
‘\b’	back space
‘\f’	form feed
‘\n’	new line
‘\r’	carriage return
‘\t’	horizontal tab
‘\v’	vertical tab
‘\’	single quote
‘\”	double quote
‘\?’	question mark
‘\\’	backslash
‘\0’	null

1.30 VARIABLES

A *variable* is a data name that may be used to store a data value. Unlike constants that remain unchanged during the execution of a program, a variable may take different values at different times during execution. In Chapter 3, we used several variables. For instance, we used the variable **amount** in Sample Program 3 to store the value of money at the end of each year (after adding the interest earned during that year).

A variable name can be chosen by the programmer in a meaningful way so as to reflect its function or nature in the program. Some examples of such names are:

Average
height

Total
Counter_1
class_strength

As mentioned earlier, variable names may consist of letters, digits, and the underscore(_) character, subject to the following conditions:

1. They must begin with a letter. Some systems permit underscore as the first character.
2. ANSI standard recognizes a length of 31 characters. However, length should not be normally more than eight characters, since only the first eight characters are treated as significant by many compilers. (In C99, at least 63 characters are significant.)
3. Uppercase and lowercase are significant. That is, the variable **Total** is not the same as **total** or **TOTAL**.
4. It should not be a keyword.
5. White space is not allowed.

Some examples of valid variable names are:

John	Value	T_raise
Delhi	x1	ph_value
mark	sum1	distance

Invalid examples include:

123	(area)
%	25th

Further examples of variable names and their correctness are given in Table 1.8.

Table 1.8 Examples of Variable Names

<i>Variable name</i>	<i>Valid?</i>	<i>Remark</i>
First_tag	Valid	
char	Not valid	char is a keyword
Price\$	Not valid	Dollar sign is illegal
group one	Not valid	Blank space is not permitted
average_number	Valid	First eight characters are significant
int_type	Valid	Keyword may be part of a name

If only the first eight characters are recognized by a compiler, then the two names

average_height
average_weight

mean the same thing to the computer. Such names can be rewritten as

avg_height and avg_weight

or

ht_average and wt_average

without changing their meanings.

1.31 DATA TYPES

C language is rich in its *data types*. Storage representations and machine instructions to handle constants differ from machine to machine. The variety of data types available allow the programmer to select the type appropriate to the needs of the application as well as the machine.

ANSI C supports three classes of data types:

1. Primary (or fundamental) data types
2. Derived data types
3. User-defined data types

The primary data types and their extensions are discussed in this section. The user-defined data types are defined in the next section while the derived data types such as arrays, functions, structures and pointers are discussed as and when they are encountered.

All C compilers support five fundamental data types, namely integer (**int**), character (**char**), floating point (**float**), double-precision floating point (**double**) and **void**. Many of them also offer extended data types such as **long int** and **long double**. Various data types and the terminology used to describe them are given in Fig. 1.69. The range of the basic four types are given in Table 1.9. We discuss briefly each one of them in this section.



NOTE: C99 adds three more data types, namely **_Bool**, **_Complex**, and **_Imaginary**. See the Appendix “C99 Features”.

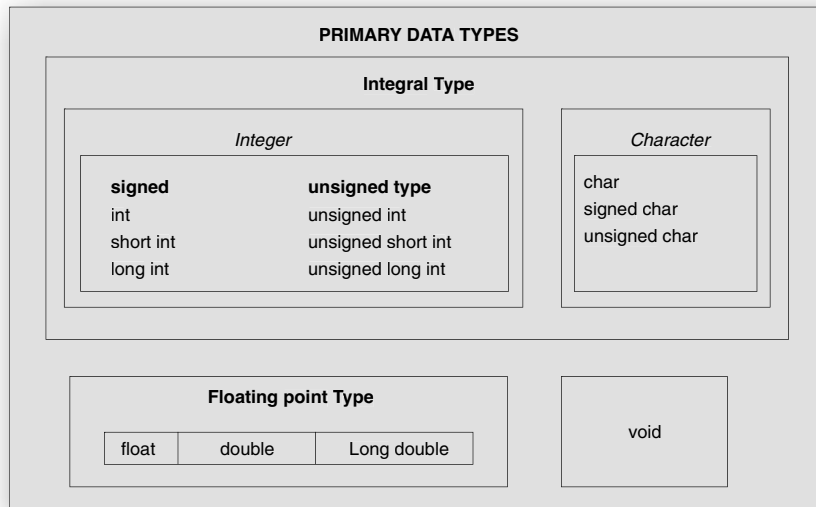


Fig. 1.69 Primary data types in C

Table 1.9 Size and Range of Basic Data Types on 16-bit Machines

<i>Data type</i>	<i>Range of values</i>
char	–128 to 127
int	–32,768 to 32,767
float	3.4e–38 to 3.4e+38
double	1.7e–308 to 1.7e+308

1.31.1 Integer Types

Integers are whole numbers with a range of values supported by a particular machine. Generally, integers occupy one word of storage, and since the word sizes of machines vary (typically, 16 or 32 bits) the size of

an integer that can be stored depends on the computer. If we use a 16 bit word length, the size of the integer value is limited to the range -32768 to $+32767$ (that is, -2^{15} to $+2^{15}-1$). A signed integer uses one bit for sign and 15 bits for the magnitude of the number. Similarly, a 32 bit word length can store an integer ranging from $-2,147,483,648$ to $2,147,483,647$.

In order to provide some control over the range of numbers and storage space, C has three classes of integer storage, namely **short int**, **int**, and **long int**, in both **signed** and **unsigned** forms. ANSI C defines these types so that they can be organized from the smallest to the largest, as shown in Fig. 1.70. For example, **short int** represents fairly small integer values and requires half the amount of storage as a regular **int** number uses. Unlike signed integers, unsigned integers use all the bits for the magnitude of the number and are always positive. Therefore, for a 16 bit machine, the range of unsigned integer numbers will be from 0 to 65,535.

We declare **long** and **unsigned** integers to increase the range of values. The use of qualifier **signed** on integers is optional because the default declaration assumes a signed number. Table 1.10 shows all the allowed combinations of basic types and qualifiers and their size and range on a 16-bit machine.

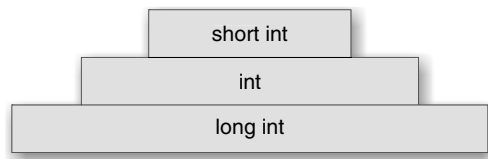


Fig. 1.70 Integer types



NOTE: C99 allows **long long** integer types. See the Appendix “C99 Features”.

Table 1.10 Size and Range of Data Types on a 16-bit Machine

Type	Size (bits)	Range
char or signed char	8	-128 to 127
unsigned char	8	0 to 255
int or signed int	16	$-32,768$ to $32,767$
unsigned int	16	0 to 65535
short int or signed short int	8	-128 to 127
unsigned short int	8	0 to 255
long int or signed long int	32	$-2,147,483,648$ to $2,147,483,647$
unsigned long int	32	0 to 4,294,967,295
float	32	$3.4E-38$ to $3.4E+38$
double	64	$1.7E-308$ to $1.7E+308$
long double	80	$3.4E-4932$ to $1.1E+4932$

1.31.2 Floating Point Types

Floating point (or real) numbers are stored in 32 bits (on all 16 bit and 32 bit machines), with 6 digits of precision. Floating point numbers are defined in C by the keyword **float**. When the accuracy provided by a **float** number is not sufficient, the type **double** can be used to define the number. A **double** data type number uses 64 bits giving a precision of 14 digits. These are known as *double precision* numbers. Remember that double type represents the same data type that **float** represents, but with a greater precision.

To extend the precision further, we may use **long double** which uses 80 bits. The relationship among floating types is illustrated in Fig. 1.71.

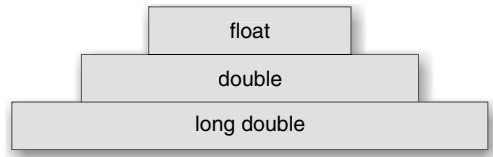


Fig. 1.71 Floating-point types

1.31.3 Void Types

The **void** type has no values. This is usually used to specify the type of functions. The type of a function is said to be **void** when it does not return any value to the calling function. It can also play the role of a generic type, meaning that it can represent any of the other standard types.

1.31.4 Character Types

A single character can be defined as a **character(char)** type data. Characters are usually stored in 8 bits (one byte) of internal storage. The qualifier **signed** or **unsigned** may be explicitly applied to char. While **unsigned chars** have values between 0 and 255, **signed chars** have values from -128 to 127.

1.32 DECLARATION OF VARIABLES

After designing suitable variable names, we must declare them to the compiler. Declaration does two things:

1. It tells the compiler what the variable name is.
2. It specifies what type of data the variable will hold.

The declaration of variables must be done before they are used in the program.

1.32.1 Primary Type Declaration

A variable can be used to store a value of any data type. That is, the name has nothing to do with its type. The syntax for declaring a variable is as follows:

```
data-type v1,v2,...vn ;
```

v1, v2, ..., vn are the names of variables. Variables are separated by commas. A declaration statement must end with a semicolon. For example, valid declarations are:

```
int count;
int number, total;
double ratio;
```

int and **double** are the keywords to represent integer type and real type data values respectively. Table 1.11 shows various data types and their keyword equivalents.

Table 1.11 Data Types and Their Keywords

<i>Data type</i>	<i>keyword equivalent</i>
Character	char
Unsigned character	unsigned char
Signed character	signed char
Signed integer	signed int (or int)

(Contd.)

1.70 Computer Programming

Signed short integer	signed short int (or short int or short)
Signed long integer	signed long int (or long int or long)
Unsigned integer	unsigned int (or unsigned)
Unsigned short integer	unsigned short int (or unsigned short)
Unsigned long integer	unsigned long int (or unsigned long)
Floating point	float
Double-precision floating point	double
Extended double-precision floating point	long double

The program segment given in Fig. 1.72 illustrates declaration of variables. **main()** is the beginning of the program. The opening brace { signals the execution of the program. Declaration of variables is usually done immediately after the opening brace of the program. The variables can also be declared outside (either before or after) the **main** function. The importance of place of declaration will be dealt in detail later while discussing functions.



NOTE: C99 permits declaration of variables at any point within a function or block, prior to their use.

```
main() /*.....Program Name..... */
{
    /*.....Declaration.....*/
    float      x, y;
    int         code;
    short int   count;
    long int    amount;
    double      deviation;
    unsigned    n;
    char        c;
    /*.....Computation..... */
    . . . .
    . . . .
    . . . .
} /*.....Program ends.....*/
```

Fig. 1.72 Declaration of variables

When an adjective (qualifier) **short**, **long**, or **unsigned** is used without a basic data type specifier, C compilers treat the data type as an **int**. If we want to declare a character variable as unsigned, then we must do so using both the terms like **unsigned char**.

Default values of Constants

Integer constants, by default, represent **int** type data. We can override this default by specifying unsigned or long after the number (by appending U or L) as shown below:

Literal	Type	Value
+111	int	111
-222	int	-222
45678U	unsigned int	45,678
-56789L	long int	-56,789
987654UL	unsigned long int	9,87,654

Similarly, floating point constants, by default represent **double** type data. If we want the resulting data type to be **float** or **long double**, we must append the letter f or F to the number for **float** and letter l or L for **long double** as shown below:

Literal	Type	Value
0.	double	0.0
.0	double	0.0
12.0	double	12.0
1.234	double	1.234
-1.2f	float	-1.2
1.23456789L	long double	1.23456789

1.32.2 User-Defined \Type Declaration

C supports a feature known as “type definition” that allows users to define an identifier that would represent an existing data type. The user-defined data type identifier can later be used to declare variables. It takes the general form:

```
typedef type identifier;
```

Where *type* refers to an existing data type and “identifier” refers to the “new” name given to the data type. The existing data type may belong to any class of type, including the user-defined ones. Remember that the new type is ‘new’ only in name, but not the data type. **typedef** cannot create a new type. Some examples of type definition are:

```
typedef int units;  
typedef float marks;
```

Here, **units** symbolizes **int** and **marks** symbolizes **float**. They can be later used to declare variables as follows:

```
units batch1, batch2;  
marks name1[50], name2[50];
```

batch1 and batch2 are declared as **int** variable and name1[50] and name 2[50] are declared as 50 element floating point array variables. The main advantage of **typedef** is that we can create meaningful data type names for increasing the readability of the program.

Another user-defined data type is enumerated data type provided by ANSI standard. It is defined as follows:

```
enum identifier {value1, value2, ... valuen};
```

The “identifier” is a user-defined enumerated data type which can be used to declare variables that can have one of the values enclosed within the braces (known as *enumeration constants*). After this definition, we can declare variables to be of this ‘new’ type as below:

```
enum identifier v1, v2, ... vn;
```

1.72 Computer Programming

The enumerated variables v_1, v_2, \dots, v_n can only have one of the values $value_1, value_2, \dots, value_n$. The assignments of the following types are valid:

```
v1 = value3;
v5 = value1;
```

An example:

```
enum day {Monday, Tuesday, ... Sunday};
enum day week_st, week_end;
week_st = Monday;
week_end = Friday;
if(week_st == Tuesday)
    week_end = Saturday;
```

The compiler automatically assigns integer digits beginning with 0 to all the enumeration constants. That is, the enumeration constant `value1` is assigned 0, `value2` is assigned 1, and so on. However, the automatic assignments can be overridden by assigning values explicitly to the enumeration constants. For example:

```
enum day {Monday = 1, Tuesday, ... Sunday};
```

Here, the constant `Monday` is assigned the value of 1. The remaining constants are assigned values that increase successively by 1.

The definition and declaration of enumerated variables can be combined in one statement. Example:

```
enum day {Monday, ... Sunday} week_st, week_end;
```

1.33 DECLARATION OF STORAGE CLASS

Variables in C can have not only *data type* but also *storage class* that provides information about their location and visibility. The storage class decides the portion of the program within which the variables are recognized. Consider the following example:

```
/* Example of storage classes */
int m;
main()
{
    int i;
    float balance;
    ....
    ....
    function1();
}
function1()
{
    int i;
    float sum;
    ....
    ....
}
```

The variable **m** which has been declared before the **main** is called *global* variable. It can be used in all the functions in the program. It need not be declared in other functions. A global variable is also known as an *external* variable.

The variables **i**, **balance** and **sum** are called *local* variables because they are declared inside a function. Local variables are visible and meaningful only inside the functions in which they are declared. They are not

known to other functions. Note that the variable **i** has been declared in both the functions. Any change in the value of **i** in one function does not affect its value in the other.

C provides a variety of storage class specifiers that can be used to declare explicitly the scope and lifetime of variables. The concepts of scope and lifetime are important only in multifunction and multiple file programs and therefore the storage classes are considered in detail later when functions are discussed. For now, remember that there are four storage class specifiers (**auto**, **register**, **static**, and **extern**) whose meanings are given in Table 1.12.

The storage class is another qualifier (like **long** or **unsigned**) that can be added to a variable declaration as shown below:

```
auto int count;
register char ch;
static int x;
extern long total;
```

Static and external (**extern**) variables are automatically initialized to zero. Automatic (**auto**) variables contain undefined values (known as ‘garbage’) unless they are initialized explicitly.

Table 1.12 Storage Classes and Their Meaning

<i>Storage class</i>	<i>Meaning</i>
auto	Local variable known only to the function in which it is declared. <i>Default is auto.</i>
static	Local variable which exists and retains its value even after the control is transferred to the calling function.
extern	Global variable known to all functions in the file.
register	Local variable which is stored in the register.

1.34 ASSIGNING VALUES TO VARIABLES

Variables are created for use in program statements such as,

```
value = amount + inrate * amount;
while (year <= PERIOD)
{
    ....
    ....
    year = year + 1;
}
```

In the first statement, the numeric value stored in the variable **inrate** is multiplied by the value stored in **amount** and the product is added to **amount**. The result is stored in the variable **value**. This process is possible only if the variables **amount** and **inrate** have already been given values. The variable **value** is called the *target variable*. While all the variables are declared for their type, the variables that are used in expressions (on the right side of equal (=) sign of a computational statement) *must* be assigned values before they are encountered in the program. Similarly, the variable **year** and the symbolic constant **PERIOD** in the **while** statement must be assigned values before this statement is encountered.

1.34.1 Assignment Statement

Values can be assigned to variables using the assignment operator = as follows:

```
variable_name = constant;
```

1.74 Computer Programming

We have already used such statements in Chapter 1. Further examples are:

```
initial_value    = 0;
final_value      = 100;
balance          = 75.84;
yes              = 'x';
```

C permits multiple assignments in one line. For example

```
initial_value = 0; final_value = 100;
```

are valid statements.

An assignment statement implies that the value of the variable on the left of the ‘equal sign’ is set equal to the value of the quantity (or the expression) on the right. The statement

```
year = year + 1;
```

means that the ‘new value’ of **year** is equal to the ‘old value’ of **year** plus 1.

During assignment operation, C converts the type of value on the right-hand side to the type on the left. This may involve truncation when real value is converted to an integer.

It is also possible to assign a value to a variable at the time the variable is declared. This takes the following form:

```
data-type variable_name = constant;
```

Some examples are:

```
int final_value  = 100;
char yes         = 'x';
double balance   = 75.84;
```

The process of giving initial values to variables is called *initialization*. C permits the *initialization* of more than one variables in one statement using multiple assignment operators. For example the statements

```
p = q = s = 0;
x = y = z = MAX;
```

are valid. The first statement initializes the variables **p**, **q**, and **s** to zero while the second initializes **x**, **y**, and **z** with **MAX**. Note that **MAX** is a symbolic constant defined at the beginning.

Remember that external and static variables are initialized to zero by *default*. Automatic variables that are not initialized explicitly will contain garbage.

EXAMPLE 1.20 Program in Fig. 1.73 shows typical declarations, assignments and values stored in various types of variables.

The variables **x** and **p** have been declared as floating-point variables. Note that the way the value of 1.234567890000 that we assigned to **x** is displayed under different output formats. The value of **x** is displayed as 1.234567880630 under `%12lf` format, while the actual value assigned is 1.234567890000. This is because the variable **x** has been declared as a **float** that can store values only up to six decimal places.

The variable **m** that has been declared as **int** is not able to store the value 54321 correctly. Instead, it contains some garbage. Since this program was run on a 16-bit machine, the maximum value that an **int** variable can store is only 32767. However, the variable **k** (declared as **unsigned**) has stored the value 54321 correctly. Similarly, the **long int** variable **n** has stored the value 1234567890 correctly.

The value 9.87654321 assigned to **y** declared as **double** has been stored correctly but the value is printed as 9.876543 under `%lf` format. Note that unless specified otherwise, the **printf** function will always display a **float** or **double** value to six decimal places. We will discuss later the output formats for displaying numbers.

Program

```

main()
{
/*.....DECLARATIONS.....*/
    float   x, p ;
    double  y,   q ;
    unsigned k ;

/*.....DECLARATIONS AND ASSIGNMENTS.....*/
    int      m = 54321 ;
    long int n = 1234567890 ;

/*.....ASSIGNMENTS.....*/
    x = 1.234567890000 ;
    y = 9.87654321 ;
    k = 54321 ;
    p = q = 1.0 ;

/*.....PRINTING.....*/
    printf("m = %d\n", m) ;
    printf("n = %ld\n", n) ;
    printf("x = %.12lf\n", x) ;
    printf("x = %f\n", x) ;
    printf("y = %.12lf\n", y) ;
    printf("y = %lf\n", y) ;
    printf("k = %u p = %f q = %.12lf\n", k, p, q) ;
}

```

Output

```

m = -11215
n = 1234567890
x = 1.234567880630
x = 1.234568
y = 9.876543210000
y = 9.876543
k = 54321 p = 1.000000 q = 1.000000000000

```

Fig. 1.73 Examples of assignments**1.34.2 Reading Data from Keyboard**

Another way of giving values to variables is to input data through keyboard using the **scanf** function. It is a general input function available in C and is very similar in concept to the **printf** function. It works much like an INPUT statement in BASIC. The general format of **scanf** is as follows:

```
scanf("control string", &variable1,&variable2,...);
```

The control string contains the format of data being received. The ampersand symbol & before each variable name is an operator that specifies the variable name's *address*. We must always use this operator, otherwise unexpected results may occur. Let us look at an example:

```
scanf("%d", &number);
```

When this statement is encountered by the computer, the execution stops and waits for the value of the variable **number** to be typed in. Since the control string "%d" specifies that an integer value is to be read from the terminal, we have to type in the value in integer form. Once the number is typed in and the 'Return' Key is pressed, the computer then proceeds to the next statement. Thus, the use of **scanf** provides an interactive feature and makes the program 'user friendly'. The value is assigned to the variable **number**.

EXAMPLE 1.21 The program in Fig. 1.74 illustrates the use of `scanf` function.

The first executable statement in the program is a **printf**, requesting the user to enter an integer number. This is known as “prompt message” and appears on the screen like

Enter an integer number

As soon as the user types in an integer number, the computer proceeds to compare the value with 100. If the value typed in is less than 100, then a message

Your number is smaller than 100

is printed on the screen. Otherwise, the message

Your number contains more than two digits

is printed. Outputs of the program run for two different inputs are also shown in Fig. 1.74.

Program

```
main()
{
    int number;
    printf("Enter an integer number\n");
    scanf ("%d", &number);
    if ( number < 100 )
        printf("Your number is smaller than 100\n\n");
    else
        printf("Your number contains more than two digits\n");
}
```

Output

```
Enter an integer number
54
Your number is smaller than 100
Enter an integer number
108
Your number contains more than two digits
```

Fig. 1.74 Use of *scanf* function for interactive computing

Some compilers permit the use of the ‘prompt message’ as a part of the control string in **scanf**, like

scanf("Enter a number %d",&number);

In Fig. 1.74 we have used a decision statement **if...else** to decide whether the number is less than 100. Decision statements are discussed in depth in Chapter 8.

EXAMPLE 1.22 Sample program 3 discussed in Chapter 4 can be converted into a more flexible interactive program using `scanf` as shown in Fig. 1.75.

In this case, computer requests the user to input the values of the amount to be invested, interest rate and period of investment by printing a prompt message

Input amount, interest rate, and period

and then waits for input values. As soon as we finish entering the three values corresponding to the three variables **amount**, **inrate**, and **period**, the computer begins to calculate the amount at the end of each year, up to ‘period’ and produces output as shown in Fig. 1.75.

Program

```

main()
{
    int year, period ;
    float amount, inrate, value ;
    printf("Input amount, interest rate, and period\n\n") ;
    scanf ("%f %f %d", &amount, &inrate, &period) ;
    printf("\n") ;
    year = 1 ;
    while( year <= period )
    {
        value = amount + inrate * amount ;
        printf("%2d Rs %8.2f\n", year, value) ;
        amount = value ;
        year = year + 1 ;
    }
}

```

Output

```

Input amount, interest rate, and period
10000 0.14 5
  1 Rs 11400.00
  2 Rs 12996.00
  3 Rs 14815.44
  4 Rs 16889.60
  5 Rs 19254.15
Input amount, interest rate, and period
20000 0.12 7
  1 Rs 22400.00
  2 Rs 25088.00
  3 Rs 28098.56
  4 Rs 31470.39
  5 Rs 35246.84
  6 Rs 39476.46
  7 Rs 44213.63

```

Fig. 1.75 *Interactive investment program*

Note that the **scanf** function contains three variables. In such cases, care should be exercised to see that the values entered match the *order* and *type* of the variables in the list. Any mismatch might lead to unexpected results. The compiler may not detect such errors.

1.35 DEFINING SYMBOLIC CONSTANTS

We often use certain unique constants in a program. These constants may appear repeatedly in a number of places in the program. One example of such a constant is 3.142, representing the value of the mathematical constant “**pi**”. Another example is the total number of students whose mark-sheets are analysed by a ‘test analysis program’. The number of students, say 50, may be used for calculating the class total, class average, standard deviation, etc. We face two problems in the subsequent use of such programs. These are

1. problem in modification of the program and
2. problem in understanding the program.

1.35.1 Modifiability

We may like to change the value of “pi” from 3.142 to 3.14159 to improve the accuracy of calculations or the number 50 to 100 to process the test results of another class. In both the cases, we will have to search throughout the program and explicitly change the value of the constant wherever it has been used. If any value is left unchanged, the program may produce disastrous outputs.

1.35.2 Understandability

When a numeric value appears in a program, its use is not always clear, especially when the same value means different things in different places. For example, the number 50 may mean the number of students at one place and the ‘pass marks’ at another place of the same program. We may forget what a certain number meant, when we read the program some days later.

Assignment of such constants to a *symbolic name* frees us from these problems. For example, we may use the name **STRENGTH** to define the number of students and **PASS_MARK** to define the pass marks required in a subject. Constant values are assigned to these names at the beginning of the program. Subsequent use of the names **STRENGTH** and **PASS_MARK** in the program has the effect of causing their defined values to be automatically substituted at the appropriate points. A constant is defined as follows:

```
#define symbolic-name value of constant
```

Valid examples of constant definitions are:

```
#define STRENGTH 100
#define PASS_MARK 50
#define MAX 200
#define PI 3.14159
```

Symbolic names are sometimes called *constant identifiers*. Since the symbolic names are constants (not variables), they do not appear in declarations. The following rules apply to a **#define** statement which define a symbolic constant:

1. Symbolic names have the same form as variable names. (Symbolic names are written in CAPITALS to visually distinguish them from the normal variable names, which are written in lowercase letters. This is only a convention, not a rule.)
2. No blank space between the pound sign ‘#’ and the word **define** is permitted.
3. ‘#’ must be the first character in the line.
4. A blank space is required between **#define** and *symbolic name* and between the *symbolic name* and the *constant*.
5. **#define** statements must not end with a semicolon.
6. After definition, the *symbolic name* should not be assigned any other value within the program by using an assignment statement. For example, STRENGTH = 200; is illegal.
7. Symbolic names are NOT declared for data types. Its data type depends on the type of constant.
8. **#define** statements may appear *anywhere* in the program but before it is referenced in the program (the usual practice is to place them in the beginning of the program).

#define statement is a *preprocessor* compiler directive and is much more powerful than what has been mentioned here. More advanced types of definitions will be discussed later. Table 1.13 illustrates some invalid statements of **#define**.

Table 1.13 Examples of Invalid #define Statements

<i>Statement</i>	<i>Validity</i>	<i>Remark</i>
#define X = 2.5	Invalid	'=' sign is not allowed
# define MAX 10	Invalid	No white space between # and define
#define N 25;	Invalid	No semicolon at the end
#define N 5, M 10	Invalid	A statement can define only one name.
#Define ARRAY 11	Invalid	define should be in lowercase letters
#define PRICES\$ 100	Invalid	\$ symbol is not permitted in name

1.36 DECLARING A VARIABLE AS CONSTANT

We may like the value of certain variables to remain constant during the execution of a program. We can achieve this by declaring the variable with the qualifier **const** at the time of initialization. Example:

```
const int class_size = 40;
```

const is a new data type qualifier defined by ANSI standard. This tells the compiler that the value of the **int** variable **class_size** must not be modified by the program. However, it can be used on the right_hand side of an assignment statement like any other variable.

1.37 DECLARING A VARIABLE AS VOLATILE

ANSI standard defines another qualifier **volatile** that could be used to tell explicitly the compiler that a variable's value may be changed at any time by some external sources (from outside the program). For example:

```
volatile int date;
```

The value of **date** may be altered by some external factors even if it does not appear on the left-hand side of an assignment statement. When we declare a variable as **volatile**, the compiler will examine the value of the variable each time it is encountered to see whether any external alteration has changed the value.

Remember that the value of a variable declared as **volatile** can be modified by its own program as well. If we wish that the value must not be modified by the program while it may be altered by some other process, then we may declare the variable as both **const** and **volatile** as shown below:

```
volatile const int location = 100;
```



NOTE: C99 adds another qualifier called restrict. See the Appendix "C99 Features".

1.38 OVERFLOW AND UNDERFLOW OF DATA

Problem of data overflow occurs when the value of a variable is either too big or too small for the data type to hold. The largest value that a variable can hold also depends on the machine. Since floating-point values are rounded off to the number of significant digits allowed (or specified), an overflow normally results in the largest possible real value, whereas an underflow results in zero.

Integers are always exact within the limits of the range of the integral data types used. However, an overflow which is a serious problem may occur if the data type does not match the value of the constant. C does not provide any warning or indication of integer overflow. It simply gives incorrect results. (Overflow normally produces a negative number.) We should therefore exercise a greater care to define correct data types for handling the input/output values.

1.39 INTRODUCTION TO MANAGING INPUT AND OUTPUT OPERATIONS

Reading, processing, and writing of data are the three essential functions of a computer program. Most programs take some data as input and display the processed data, often known as *information* or *results*, on a suitable medium. So far we have seen two methods of providing data to the program variables. One method is to assign values to variables through the assignment statements such as **x = 5; a = 0;** and so on. Another method is to use the input function **scanf** which can read data from a keyboard. We have used both the methods in most of our earlier example programs. For outputting results we have used extensively the function **printf** which sends results out to a terminal.

Unlike other high-level languages, C does not have any built-in input/output statements as part of its syntax. All input/output operations are carried out through function calls such as **printf** and **scanf**. There exist several functions that have more or less become standard for input and output operations in C. These functions are collectively known as the standard I/O library. In this chapter, we shall discuss some common I/O functions that can be used on many machines without any change. However, one should consult the system reference manual for exact details of these functions and also to see what other functions are available.

It may be recalled that we have included a statement

```
#include <math.h>
```

in the Sample Program 5 in Chapter 4, where a math library function $\cos(x)$ has been used. This is to instruct the compiler to fetch the function $\cos(x)$ from the math library, and that it is not a part of C language. Similarly, each program that uses a standard input/output function must contain the statement

```
#include <stdio.h>
```

at the beginning. However, there might be exceptions. For example, this is not necessary for the functions **printf** and **scanf** which have been defined as a part of the C language.

The file name **stdio.h** is an abbreviation for *standard input-output header* file. The instruction **#include <stdio.h>** tells the compiler 'to search for a file named **stdio.h** and place its contents at this point in the program'. The contents of the header file become part of the source code when it is compiled.

1.40 READING A CHARACTER

The simplest of all input/output operations is reading a character from the 'standard input' unit (usually the keyboard) and writing it to the 'standard output' unit (usually the screen). Reading a single character can be done by using the function **getchar**. (This can also be done with the help of the **scanf** function which is discussed in Section 1.4.) The **getchar** takes the following form:

```
variable_name = getchar( );
```

variable_name is a valid C name that has been declared as **char** type. When this statement is encountered, the computer waits until a key is pressed and then assigns this character as a value to **getchar** function. Since **getchar** is used on the right-hand side of an assignment statement, the character value of **getchar** is in turn assigned to the variable name on the left. For example

```
char name;
name = getchar();
```

Will assign the character 'H' to the variable **name** when we press the key H on the keyboard. Since **getchar** is a function, it requires a set of parentheses as shown.

EXAMPLE 1.23 The program in Fig. 1.76 shows the use of **getchar** function in an interactive environment.

The program displays a question of YES/NO type to the user and reads the user's response in a single character (Y or N). If the response is Y or y, it outputs the message

My name is BUSY BEE

otherwise, outputs

You are good for nothing



NOTE: There is one line space between the input text and output message.

Program

```
#include <stdio.h>
main()
{
    char answer;
    printf("Would you like to know my name?\n");
    printf("Type Y for YES and N for NO: ");
    answer = getchar(); /* .... Reading a character...*/
    if(answer == 'Y' || answer == 'y')
        printf("\n\nMy name is BUSY BEE\n");
    else
        printf("\n\nYou are good for nothing\n");
}
```

Output

```
Would you like to know my name?
Type Y for YES and N for NO: Y
My name is BUSY BEE
Would you like to know my name?
Type Y for YES and N for NO: n
You are good for nothing
```

Fig. 1.76 Use of **getchar** function to read a character from keyboard

The **getchar** function may be called successively to read the characters contained in a line of text. For example, the following program segment reads characters from keyboard one after another until the 'Return' key is pressed.

```
---
---
char character;
character = ' ';
while(character != '\n')
{
    character = getchar();
}
```


WARNING

The **getchar()** function accepts any character keyed in. This includes RETURN and TAB. This means when we enter single character input, the newline character is waiting in the input queue after **getchar()** returns. This could create problems when we use **getchar()** in a loop interactively. A dummy **getchar()** may be used to 'eat' the unwanted newline character. We can also use the **fflush** function to flush out the unwanted characters.



NOTE: We shall be using decision statements like **if**, **if...else** and **while** extensively in this chapter. They are discussed in detail in Chapters 8 and 9.

EXAMPLE 1.24 The program of Fig. 1.77 requests the user to enter a character and displays a message on the screen telling the user whether the character is an alphabet or digit, or any other special character.

This program receives a character from the keyboard and tests whether it is a letter or digit and prints out a message accordingly. These tests are done with the help of the following functions:

isalpha(character)
isdigit(character)

For example, **isalpha** assumes a value non-zero (TRUE) if the argument **character** contains an alphabet; otherwise it assumes 0 (FALSE). Similar is the case with the function **isdigit**.

Program

```
#include <stdio.h>
#include <ctype.h>
main()
{
    char character;
    printf("Press any key\n");
    character = getchar();
    if (isalpha(character) > 0)/* Test for letter */
        printf("The character is a letter.");
    else
        if (isdigit (character) > 0)/* Test for digit */
            printf("The character is a digit.");
        else
            printf("The character is not alphanumeric.");
}
```

Output

```
Press any key
h
The character is a letter.
Press any key
5
The character is a digit.
Press any key
*
The character is not alphanumeric.
```

Fig. 1.77 Program to test the character type

C supports many other similar functions, which are given in Table 1.14. These character functions are contained in the file **ctype.h** and therefore the statement

```
#include <ctype.h>
```

must be included in the program.

Table 1.14 Character Test Functions

<i>Function</i>	<i>Test</i>
isalnum(c)	Is c an alphanumeric character?
isalpha(c)	Is c an alphabetic character?
isdigit(c)	Is c a digit?
islower(c)	Is c lower case letter?
isprint(c)	Is c a printable character?
ispunct(c)	Is c a punctuation mark?
isspace(c)	Is c a white space character?
isupper(c)	Is c an upper case letter?

1.41 WRITING A CHARACTER

Like **getchar**, there is an analogous function **putchar** for writing characters one at a time to the terminal. It takes the form as shown below:

```
putchar (variable_name);
```

where *variable_name* is a type **char** variable containing a character. This statement displays the character contained in the *variable_name* at the terminal. For example, the statements

```
answer = 'Y';
putchar (answer);
```

will display the character Y on the screen. The statement

```
putchar ('\n');
```

would cause the cursor on the screen to move to the beginning of the next line.

EXAMPLE 1.25 A program that reads a character from keyboard and then prints it in reverse case is given in Fig. 1.78. That is, if the input is upper case, the output will be lower case and vice versa.

The program uses three new functions: **islower**, **toupper**, and **tolower**. The function **islower** is a conditional function and takes the value **TRUE** if the argument is a lowercase alphabet; otherwise takes the value **FALSE**. The function **toupper** converts the lowercase argument into an uppercase alphabet while the function **tolower** does the reverse.

Program

```
#include <stdio.h>
#include <ctype.h>
main()
{
    char alphabet;
    printf("Enter an alphabet");
    putchar('\n'); /* move to next line */
```

```

    alphabet = getchar();
    if (islower(alphabet))
        putchar(toupper(alphabet)); /* Reverse and display */
    else
        putchar(tolower(alphabet)); /* Reverse and display */
}

```

Output

```

Enter an alphabet
a
A
Enter an alphabet
Q
q
Enter an alphabet
z
Z

```

Fig. 1.78 Reading and writing of alphabets in reverse case

1.42 FORMATTED INPUT

Formatted input refers to an input data that has been arranged in a particular format. For example, consider the following data:

15.75 123 John

This line contains three pieces of data, arranged in a particular form. Such data has to be read conforming to the format of its appearance. For example, the first part of the data should be read into a variable **float**, the second into **int**, and the third part into **char**. This is possible in C using the **scanf** function. (**scanf** means *scan* formatted.)

We have already used this input function in a number of examples. Here, we shall explore all of the options that are available for reading the formatted data with **scanf** function. The general form of **scanf** is

```
scanf ("control string", arg1, arg2, ..... argn);
```

The *control string* specifies the field format in which the data is to be entered and the arguments *arg1*, *arg2*, ..., *argn* specify the address of locations where the data is stored. Control string and arguments are separated by commas.

Control string (also known as *format string*) contains field specifications, which direct the interpretation of input data. It may include:

- Field (or format) specifications, consisting of the conversion character %, a data type character (or type specifier), and an *optional* number, specifying the field width.
- Blanks, tabs, or newlines.

Blanks, tabs and newlines are ignored. The data type character indicates the type of data that is to be assigned to the variable associated with the corresponding argument. The field width specifier is optional. The discussions that follow will clarify these concepts.

1.42.1 Inputting Integer Numbers

The field specification for reading an integer number is:

```
% w sd
```


The percentage sign (%) indicates that a conversion specification follows. *w* is an integer number that specifies the *field width* of the number to be read and *d*, known as data type character, indicates that the number to be read is in integer mode. Consider the following example:

```
scanf ("%2d %5d", &num1, &num2);
```

Data line:

```
50 31426
```

The value 50 is assigned to **num1** and 31426 to **num2**. Suppose the input data is as follows:

```
31426 50
```

The variable **num1** will be assigned 31 (because of %2d) and **num2** will be assigned 426 (unread part of 31426). The value 50 that is unread will be assigned to the first variable in the next **scanf** call. This kind of errors may be eliminated if we use the field specifications without the field width specifications. That is, the statement

```
scanf ("%d %d", &num1, &num2);
```

will read the data

```
31426 50
```

correctly and assign 31426 to **num1** and 50 to **num2**.

Input data items must be separated by spaces, tabs or newlines. Punctuation marks do not count as separators. When the **scanf** function searches the input data line for a value to be read, it will always bypass any white space characters.

What happens if we enter a floating point number instead of an integer? The fractional part may be stripped away! Also, **scanf** may skip reading further input.

When the **scanf** reads a particular value, reading of the value will be terminated as soon as the number of characters specified by the field width is reached (if specified) or until a character that is not valid for the value being read is encountered. In the case of integers, valid characters are an optionally signed sequence of digits.

An input field may be skipped by specifying * in the place of field width. For example, the statement

```
scanf ("%d %*d %d", &a, &b)
```

will assign the data

```
123 456 789
```

as follows:

```
123 to a
456 skipped (because of *)
789 to b
```

The data type character **d** may be preceded by **l** (letter ell) to read long integers and **h** to read short integers.



NOTE: We have provided white space between the field specifications. These spaces are not necessary with the numeric input, but it is a good practice to include them.

EXAMPLE 1.26 Various input formatting options for reading integers are experimented in the program shown in Fig. 1.79.

Program

```

main()
{
    int a,b,c,x,y,z;
    int p,q,r;
    printf("Enter three integer numbers\n");
    scanf("%d %*d %d",&a,&b,&c);
    printf("%d %d %d \n\n",a,b,c);
    printf("Enter two 4-digit numbers\n");
    scanf("%2d %4d",&x,&y);
    printf("%d %d\n\n", x,y);
    printf("Enter two integers\n");
    scanf("%d %d", &a,&x);
    printf("%d %d \n\n",a,x);
    printf("Enter a nine digit number\n");
    scanf("%3d %4d %3d",&p,&q,&r);
    printf("%d %d %d \n\n",p,q,r);
    printf("Enter two three digit numbers\n");
    scanf("%d %d",&x,&y);
    printf("%d %d",x,y);
}

```

Output

```

Enter three integer numbers
1 2 3
1 3 -3577
Enter two 4-digit numbers
6789 4321
67 89
Enter two integers
44 66
4321 44
Enter a nine-digit number
123456789
66 1234 567
Enter two three-digit numbers
123 456
89 123

```

Fig. 1.79 Reading integers using *scanf*

The first **scanf** requests input data for three integer values **a**, **b**, and **c**, and accordingly three values 1, 2, and 3 are keyed in. Because of the specification `%*d` the value 2 has been skipped and 3 is assigned to the variable **b**. Notice that since no data is available for **c**, it contains garbage.

The second **scanf** specifies the format `%2d` and `%4d` for the variables **x** and **y** respectively. Whenever we specify field width for reading integer numbers, the input numbers should not contain more digits than the specified size. Otherwise, the extra digits on the right-hand side will be truncated and assigned to the next variable in the list. Thus, the second **scanf** has truncated the four digit number 6789 and assigned 67 to **x** and 89 to **y**. The value 4321 has been assigned to the first variable in the immediately following **scanf** statement.



NOTE: It is legal to use a non-whitespace character between field specifications. However, the **scanf** expects a matching character in the given location. For example,

```
scanf("%d-%d", &a, &b);
```

accepts input like

123-456

to assign 123 to a and 456 to b.

1.42.2 Inputting Real Numbers

Unlike integer numbers, the field width of real numbers is not to be specified and therefore **scanf** reads real numbers using the simple specification **%f** for both the notations, namely, decimal point notation and exponential notation. For example, the statement

```
scanf("%f %f %f", &x, &y, &z);
```

with the input data

475.89 43.21E-1 678

will assign the value 475.89 to **x**, 4.321 to **y**, and 678.0 to **z**. The input field specifications may be separated by any arbitrary blank spaces.

If the number to be read is of **double** type, then the specification should be **%lf** instead of simple **%f**. A number may be skipped using **%*f** specification.

EXAMPLE 1.27 Reading of real numbers (in both decimal point and exponential notation) is illustrated in Fig. 1.80.

Program

```
main()
{
    float x,y;
    double p,q;
    printf("Values of x and y:");
    scanf("%f %e", &x, &y);
    printf("\n");
    printf("x = %f\n y = %f\n\n", x, y);
    printf("Values of p and q:");
    scanf("%lf %lf", &p, &q);
    printf("\n\n p = %.12lf\n q = %.12e", p,q);
}
```

Output

```
Values of x and y:12.3456 17.5e-2
x = 12.345600
y = 0.175000
Values of p and q:4.142857142857 18.5678901234567890
p = 4.142857142857
q = 1.8567890123456e+001
```

Fig. 1.80 Reading of real numbers

1.42.3 Inputting Character Strings

We have already seen how a single character can be read from the terminal using the **getchar** function. The same can be achieved using the **scanf** function also. In addition, a **scanf** function can input strings containing more than one character. Following are the specifications for reading character strings:

%ws or %wc

The corresponding argument should be a pointer to a character array. However, **%c** may be used to read a single character when the argument is a pointer to a **char** variable.

EXAMPLE 1.28 Reading of strings using **%wc** and **%ws** is illustrated in Fig. 1.81.

The program in Fig. 1.81 illustrates the use of various field specifications for reading strings. When we use **%wc** for reading a string, the system will wait until the w^{th} character is keyed in.



NOTE: Note that the specification **%s** terminates reading at the encounter of a blank space. Therefore, **name2** has read only the first part of “New York” and the second part is automatically assigned to **name3**. However, during the second run, the string “New-York” is correctly assigned to **name2**.

Program

```
main()
{
    int no;
    char name1[15], name2[15], name3[15];
    printf("Enter serial number and name one\n");
    scanf("%d %15c", &no, name1);
    printf("%d %15s\n\n", no, name1);
    printf("Enter serial number and name two\n");
    scanf("%d %s", &no, name2);
    printf("%d %15s\n\n", no, name2);
    printf("Enter serial number and name three\n");
    scanf("%d %15s", &no, name3);
    printf("%d %15s\n\n", no, name3);
}
```

Output

```
Enter serial number and name one
1 123456789012345
1 123456789012345r
Enter serial number and name two
2 New York
2                      New
Enter serial number and name three
2                      York
Enter serial number and name one
1 123456789012
1 123456789012r
Enter serial number and name two
2 New-York
2                      New-York
Enter serial number and name three
3 London
3                      London
```

Fig. 1.81 Reading of strings

Some versions of **scanf** support the following conversion specifications for strings:

```
%[characters]
%^[characters]
```

The specification **%[characters]** means that only the characters specified within the brackets are permissible in the input string. If the input string contains any other character, the string will be terminated at the first encounter of such a character. The specification **%^[characters]** does exactly the reverse. That is, the characters specified after the circumflex (^) are not permitted in the input string. The reading of the string will be terminated at the encounter of one of these characters.

EXAMPLE 1.29 The program in Fig. 1.82 illustrates the function of **%[]** specification.

Program-A

```
main()
{
    char address[80];
    printf("Enter address\n");
    scanf("%[a-z]", address);
    printf("%-80s\n\n", address);
}
```

Output

```
Enter address
new delhi 110002
new delhi
```

Program-B

```
main()
{
    char address[80];
    printf("Enter address\n");
    scanf("%[^n]", address);
    printf("%-80s", address);
}
```

Output

```
Enter address
New Delhi 110 002
New Delhi 110 002
```

Fig. 1.82 Illustration of conversion specification **%[]** for strings

Reading Blank Spaces

We have earlier seen that **%s** specifier cannot be used to read strings with blank spaces. But, this can be done with the help of **%[]** specification. Blank spaces may be included within the brackets, thus enabling the **scanf** to read strings with spaces. Remember that the lowercase and uppercase letters are distinct. See Fig. 1.82.

1.42.4 Reading Mixed Data Types

It is possible to use one **scanf** statement to input a data line containing mixed mode data. In such cases, care should be exercised to ensure that the input data items match the control specifications *in order* and *type*. When an attempt is made to read an item that does not match the type expected, the **scanf** function does not read any further and immediately returns the values read. The statement

1.90 Computer Programming

```
scanf ("%d %c %f %s", &count, &code, &ratio, name);
```

will read the data

```
15 p 1.575 coffee
```

correctly and assign the values to the variables in the order in which they appear. Some systems accept integers in the place of real numbers and vice versa, and the input data is converted to the type specified in the control string.



NOTE: A space before the `%c` specification in the format string is necessary to skip the white space before p.

1.42.5 Detection of Errors in Input

When a **scanf** function completes reading its list, it returns the value of number of items that are successfully read. This value can be used to test whether any errors occurred in reading the input. For example, the statement

```
scanf("%d %f %s, &a, &b, name);
```

will return the value 3 if the following data is typed in:

```
20 150.25 motor
```

and will return the value 1 if the following line is entered

```
20 motor 150.25
```

This is because the function would encounter a string when it was expecting a floating-point value, and would therefore terminate its scan after reading the first value.

EXAMPLE 1.30 The program presented in Fig. 1.83 illustrates the testing for correctness of reading of data by scanf function.

The function **scanf** is expected to read three items of data and therefore, when the values for all the three variables are read correctly, the program prints out their values. During the third run, the second item does not match with the type of variable and therefore the reading is terminated and the error message is printed. Same is the case with the fourth run.

In the last run, although data items do not match the variables, no error message has been printed. When we attempt to read a real number for an **int** variable, the integer part is assigned to the variable, and the truncated decimal part is assigned to the next variable.



NOTE: The character '2' is assigned to the character variable c.

Program

```
main()
{
    int a;
    float b;
    char c;
    printf("Enter values of a, b and c\n");
    if (scanf("%d %f %c", &a, &b, &c) == 3)
```

```

        printf("a = %d b = %f c = %c\n" , a, b, c);
    else
        printf("Error in input.\n");
}

```

Output

```

Enter values of a, b and c
12 3.45 A
a = 12      b = 3.450000      c = A
Enter values of a, b and c
23 78 9
a = 23      b = 78.000000     c = 9
Enter values of a, b and c
8 A 5.25
Error in input.
Enter values of a, b and c
Y 12 67
Error in input.
Enter values of a, b and c
15.75 23 X
a = 15      b = 0.750000      c = 2

```

Fig. 1.83 Detection of errors in scanf input

Commonly used **scanf** format codes are given in Table 1.15

Table 1.15 Commonly used scanf Format Codes

<i>Code</i>	<i>Meaning</i>
%c	read a single character
%d	read a decimal integer
%e	read a floating point value
%f	read a floating point value
%g	read a floating point value
%h	read a short integer
%i	read a decimal, hexadecimal or octal integer
%o	read an octal integer
%s	read a string
%u	read an unsigned decimal integer
%x	read a hexadecimal integer
%[.]	read a string of word(s)

The following letters may be used as prefix for certain conversion characters.

- h for short integers
- l for long integers or double
- L for long double



NOTE: C99 adds some more format codes.

1.42.6 Points to Remember while Using scanf

If we do not plan carefully, some ‘crazy’ things can happen with **scanf**. Since the I/O routines are not a part of C language, they are made available either as a separate module of the C library or as a part of the operating system (like UNIX). New features are added to these routines from time to time as new versions of systems are released. We should consult the system reference manual before using these routines. Given below are some of the general points to keep in mind while writing a **scanf** statement.

1. All function arguments, except the control string, *must* be pointers to variables.
2. Format specifications contained in the control string should match the arguments in order.
3. Input data items must be separated by spaces and must match the variables receiving the input in the same order.
4. The reading will be terminated, when scanf encounters a ‘mismatch’ of data or a character that is not valid for the value being read.
5. When searching for a value, scanf ignores line boundaries and simply looks for the next appropriate character.
6. Any unread data items in a line will be considered as part of the data input line to the next scanf call.
7. When the field width specifier *w* is used, it should be large enough to contain the input data size.

Rules for scanf

- Each variable to be read must have a filed specification.
- For each field specification, there must be a variable address of proper type.
- Any non-whitespace character used in the format string must have a matching character in the user input.
- Never end the format string with whitespace. It is a fatal error!
- The scanf reads until:
 - A whitespace character is found in a numeric specification, or
 - The maximum number of characters have been read or
 - An error is detected, or
 - The end of file is reached

1.43 FORMATTED OUTPUT

We have seen the use of **printf** function for printing captions and numerical results. It is highly desirable that the outputs are produced in such a way that they are understandable and are in an easy-to-use form. It is therefore necessary for the programmer to give careful consideration to the appearance and clarity of the output produced by his program.

The **printf** statement provides certain features that can be effectively exploited to control the alignment and spacing of print-outs on the terminals. The general form of **printf** statement is:

```
printf("control string", arg1, arg2, ....., argn);
```

Control string consists of three types of items:

1. Characters that will be printed on the screen as they appear.
2. Format specifications that define the output format for display of each item.
3. *Escape sequence* characters such as `\n`, `\t`, and `\b`.

The control string indicates how many arguments follow and what their types are. The arguments *arg1*, *arg2*,, *argn* are the variables whose values are formatted and printed according to the specifications of the control string. The arguments should match in number, order and type with the format specifications.

A simple format specification has the following form:

% *w.p* type-specifier

where *w* is an integer number that specifies the total number of columns for the output value and *p* is another integer number that specifies the number of digits to the right of the decimal point (of a real number) or the number of characters to be printed from a string. Both *w* and *p* are optional. Some examples of formatted **printf** statement are:

```
printf("Programming in C");
printf(" ");
printf("\n");
printf("%d", x);
printf("a = %f\n b = %f", a, b);
printf("sum = %d", 1234);
printf("\n\n");
```

printf never supplies a *newline* automatically and therefore multiple **printf** statements may be used to build one line of output. A *newline* can be introduced by the help of a newline character '\n' as shown in some of the examples above.

1.43.1 Output of Integer Numbers

The format specification for printing an integer number is:

% *w d*

where *w* specifies the minimum field width for the output. However, if a number is greater than the specified field width, it will be printed in full, overriding the minimum specification. *d* specifies that the value to be printed is an integer. The number is written *right-justified* in the given field width. Leading blanks will appear as necessary. The following examples illustrate the output of the number 9876 under different formats:

Format	Output
printf("%d", 9876)	9 8 7 6
printf("%6d", 9876)	9 8 7 6
printf("%2d", 9876)	9 8 7 6
printf("%-6d", 9876)	9 8 7 6
printf("%06d", 9876)	0 0 9 8 7 6

It is possible to force the printing to be *left-justified* by placing a *minus* sign directly after the % character, as shown in the fourth example above. It is also possible to pad with zeros the leading blanks by placing a 0 (zero) before the field width specifier as shown in the last item above. The minus (-) and zero (0) are known as *flags*.

Long integers may be printed by specifying **ld** in the place of **d** in the format specification. Similarly, we may use **hd** for printing short integers.

EXAMPLE 1.31 The program in Fig. 1.84 illustrates the output of integer numbers under various formats.

Program

```

main()
{
    int m = 12345;
    long n = 987654;
    printf("%d\n",m);
    printf("%10d\n",m);
    printf("%010d\n",m);
    printf("%-10d\n",m);
    printf("%10ld\n",n);
    printf("%10ld\n",-n);
}

```

Output

```

12345
      12345
0000012345
12345
      987654
- 987654

```

Fig. 1.84 Formatted output of integers

1.43.2 Output of Real Numbers

The output of a real number may be displayed in decimal notation using the following format specification:

```
% w.p f
```

The integer *w* indicates the minimum number of positions that are to be used for the display of the value and the integer *p* indicates the number of digits to be displayed after the decimal point (*precision*). The value, when displayed, is *rounded to p decimal places* and printed *right-justified* in the field of *w* columns. Leading blanks and trailing zeros will appear as necessary. The default precision is 6 decimal places. The negative numbers will be printed with the minus sign. The number will be displayed in the form [-] mmm.nnn.

We can also display a real number in exponential notation by using the specification:

```
% w.p e
```

The display takes the form

```
[ - ] m.nnnne [ ± ] xx
```

where the length of the string of n's is specified by the precision *p*. The default precision is 6. The field width *w* should satisfy the condition.

$$w \geq p+7$$

The value will be rounded off and printed right justified in the field of *w* columns.

Padding the leading blanks with zeros and printing with *left-justification* are also possible by using flags 0 or - before the field width specifier *w*.

The following examples illustrate the output of the number $y = 98.7654$ under different format specifications:

Format

printf(“%7.4f”,y)

Output

9	8	.	7	6	5	4
---	---	---	---	---	---	---

printf("%7.2f",y)	<table border="1"><tr><td></td><td></td><td>9</td><td>8</td><td>.</td><td>7</td><td>7</td></tr></table>			9	8	.	7	7					
		9	8	.	7	7							
printf("%-7.2f",y)	<table border="1"><tr><td>9</td><td>8</td><td>.</td><td>7</td><td>7</td><td></td><td></td></tr></table>	9	8	.	7	7							
9	8	.	7	7									
printf("%f",y)	<table border="1"><tr><td>9</td><td>8</td><td>.</td><td>7</td><td>6</td><td>5</td><td>4</td></tr></table>	9	8	.	7	6	5	4					
9	8	.	7	6	5	4							
printf("%10.2e",y)	<table border="1"><tr><td></td><td></td><td>9</td><td>.</td><td>8</td><td>8</td><td>e</td><td>+</td><td>0</td><td>1</td></tr></table>			9	.	8	8	e	+	0	1		
		9	.	8	8	e	+	0	1				
printf("%11.4e",-y)	<table border="1"><tr><td>-</td><td>9</td><td>.</td><td>8</td><td>7</td><td>6</td><td>5</td><td>e</td><td>+</td><td>0</td><td>1</td></tr></table>	-	9	.	8	7	6	5	e	+	0	1	
-	9	.	8	7	6	5	e	+	0	1			
printf("%-10.2e",y)	<table border="1"><tr><td>9</td><td>.</td><td>8</td><td>8</td><td>e</td><td>+</td><td>0</td><td>1</td><td></td><td></td></tr></table>	9	.	8	8	e	+	0	1				
9	.	8	8	e	+	0	1						
printf("%e",y)	<table border="1"><tr><td>9</td><td>.</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>0</td><td>e</td><td>+</td><td>0</td><td>1</td></tr></table>	9	.	8	7	6	5	4	0	e	+	0	1
9	.	8	7	6	5	4	0	e	+	0	1		

Some systems also support a special field specification character that lets the user define the field size at run time. This takes the following form:

```
printf("%*.*f", width, precision, number);
```

In this case, both the field width and the precision are given as arguments which will supply the values for **w** and **p**. For example,

```
printf("%*.*f",7,2,number);
```

is equivalent to

```
printf("%7.2f",number);
```

The advantage of this format is that the values for *width* and *precision* may be supplied at run time, thus making the format a *dynamic* one. For example, the above statement can be used as follows:

```
int width = 7;
int precision = 2;
.....
printf("%*.*f", width, precision, number);
```

EXAMPLE 1.32 All the options of printing a real number are illustrated in Fig. 1.85.

Program

```
main()
{
    float y = 98.7654;
    printf("%7.4f\n", y);
    printf("%f\n", y);
    printf("%7.2f\n", y);
    printf("%-7.2f\n", y);
    printf("%07.2f\n", y);
    printf("%*.*f", 7, 2, y);
    printf("\n");
    printf("%10.2e\n", y);
    printf("%12.4e\n", -y);
    printf("%-10.2e\n", y);
    printf("%e\n", y);
}
```

Output

```
98.7654
98.765404
98.77
```

98.77
0098.77
98.77
9.88e+001
-9.8765e+001
9.88e+001
9.876540e+001

Fig. 1.85 Formatted output of real numbers

1.43.3 Printing of a Single Character

A single character can be displayed in a desired position using the format:

`% wc`

The character will be displayed *right-justified* in the field of *w* columns. We can make the display *left-justified* by placing a minus sign before the integer *w*. The default value for *w* is 1.

1.43.4 Printing of Strings

The format specification for outputting strings is similar to that of real numbers. It is of the form

`% w.ps`

where *w* specifies the field width for display and *p* instructs that only the first *p* characters of the string are to be displayed. The display is *right-justified*.

The following examples show the effect of variety of specifications in printing a string “NEW DELHI 110001”, containing 16 characters (including blanks).

Specification	Output
	1 2 3 4 5 6 7 8 9 10 2 3 4 5 6 7 8 9 0
%s	N E W D E L H I 1 1 0 0 0 1
%20s	N E W D E L H I 1 1 0 0 0 1
%20.10s	N E W D E L H I
%.5s	N E W D
%-20.10s	N E W D E L H I
%5s	N E W D E L H I 1 1 0 0 0 1

EXAMPLE 1.33 Printing of characters and strings is illustrated in Fig. 1.86.

Program

```

main()
{
    char x = 'A';
    char name[20] = "ANIL KUMAR GUPTA";
    printf("OUTPUT OF CHARACTERS\n\n");
    printf("%c\n%3c\n%5c\n", x,x,x);
    printf("%3c\n%c\n", x,x);
    printf("\n");
    printf("OUTPUT OF STRINGS\n\n");
    printf("%s\n", name);
    printf("%20s\n", name);
    printf("%20.10s\n", name);
    printf("%.5s\n", name);
    printf("%-20.10s\n", name);
    printf("%5s\n", name);
}

```

Output

```

OUTPUT OF CHARACTERS
A
    A
      A
A
OUTPUT OF STRINGS
ANIL KUMAR GUPTA
      ANIL KUMAR GUPTA
            ANIL KUMAR
ANIL
ANIL KUMAR
ANIL KUMAR GUPTA

```

Fig. 1.86 *Printing of characters and strings***1.43.5 Mixed Data Output**

It is permitted to mix data types in one **printf** statement. For example, the statement of the type

```
printf("%d %f %s %c", a, b, c, d);
```

is valid. As pointed out earlier, **printf** uses its control string to decide how many variables to be printed and what their types are. Therefore, the format specifications should match the variables in number, order, and type. If there are not enough variables or if they are of the wrong type, the output results will be incorrect.

The following letters may be used as prefix for certain conversion characters.

- h for short integers
- l for long integers or double
- L for long double.



NOTE: C99 adds some more format codes.

1.43.6 Enhancing the Readability of Output

Computer outputs are used as information for analysing certain relationships between variables and for making decisions. Therefore the correctness and clarity of outputs are of utmost importance. While the

correctness depends on the solution procedure, the clarity depends on the way the output is presented. Following are some of the steps we can take to improve the clarity and hence the readability and understandability of outputs.

1. Provide enough blank space between two numbers.
2. Introduce appropriate headings and variable names in the output.
3. Print special messages whenever a peculiar condition occurs in the output.
4. Introduce blank lines between the important sections of the output.

The system usually provides two blank spaces between the numbers. However, this can be increased by selecting a suitable field width for the numbers or by introducing a 'tab' character between the specifications. For example, the statement

```
printf("a = %d\t b = %d", a, b);
```

Table 1.16 Commonly used printf Format Codes

<i>Code</i>	<i>Meaning</i>
%c	print a single character
%d	print a decimal integer
%e	print a floating point value in exponent form
%f	print a floating point value without exponent
%g	print a floating point value either e-type or f-type depending on
%i	print a signed decimal integer
%o	print an octal integer, without leading zero
%s	print a string
%u	print an unsigned decimal integer
%x	print a hexadecimal integer, without leading Ox

Table 1.17 Commonly used Output Format Flags

<i>Flag</i>	<i>Meaning</i>
–	Output is left-justified within the field. Remaining field will be blank.
+	+ or – will precede the signed numeric item.
0	Causes leading zeros to appear.
# (with o or x)	Causes octal and hex items to be preceded by O and Ox, respectively.
# (with e, f or g)	Causes a decimal point to be present in all floating point numbers, even if it is whole number. Also prevents the truncation of trailing zeros in g-type conversion.

will provide four blank spaces between the two fields. We can also print them on two separate lines by using the statement

```
printf("a = %d\n b = %d", a, b);
```

Messages and headings can be printed by using the character strings directly in the **printf** statement. Examples:

```
printf("\n OUTPUT RESULTS \n");
printf("Code\t Name\t Age\n");
printf("Error in input data\n");
printf("Enter your name\n");
```

1.44 INTRODUCTION TO OPERATORS AND EXPRESSIONS

C supports a rich set of built-in operators. We have already used several of them, such as `=`, `+`, `-`, `*`, `&` and `<`. An *operator* is a symbol that tells the computer to perform certain mathematical or logical manipulations. Operators are used in programs to manipulate data and variables. They usually form a part of the mathematical or logical *expressions*.

C operators can be classified into a number of categories. They include:

1. Arithmetic operators
2. Relational operators
3. Logical operators
4. Assignment operators
5. Increment and decrement operators
6. Conditional operators
7. Bitwise operators
8. Special operators

An expression is a sequence of operands and operators that reduces to a single value. For example,
 $10 + 15$

is an expression whose value is 25. The value can be any type other than *void*.

1.45 ARITHMETIC OPERATORS

C provides all the basic arithmetic operators. They are listed in Table 1.18. The operators `+`, `-`, `*`, and `/` all work the same way as they do in other languages. These can operate on any built-in data type allowed in C. The unary minus operator, in effect, multiplies its single operand by `-1`. Therefore, a number preceded by a minus sign changes its sign.

Table 1.18 Arithmetic Operators

Operator	Meaning
<code>+</code>	Addition or unary plus
<code>-</code>	Subtraction or unary minus
<code>*</code>	Multiplication
<code>/</code>	Division
<code>%</code>	Modulo division

Integer division truncates any fractional part. The modulo division operation produces the remainder of an integer division. Examples of use of arithmetic operators are:

$$\begin{array}{ll} a - b & a + b \\ a * b & a / b \\ a \% b & -a * b \end{array}$$

Here **a** and **b** are variables and are known as *operands*. The modulo division operator `%` cannot be used on floating point data. Note that C does not have an operator for *exponentiation*. Older versions of C does not support unary plus but ANSI C supports it.

1.45.1 Integer Arithmetic

When both the operands in a single arithmetic expression such as `a+b` are integers, the expression is called an *integer expression*, and the operation is called *integer arithmetic*. Integer arithmetic always yields an integer

1.100 Computer Programming

value. The largest integer value depends on the machine, as pointed out earlier. In the above examples, if **a** and **b** are integers, then for **a** = 14 and **b** = 4 we have the following results:

```
a - b = 10
a + b = 18
a * b = 56
a / b = 3 (decimal part truncated)
a % b = 2 (remainder of division)
```

During integer division, if both the operands are of the same sign, the result is truncated towards zero. If one of them is negative, the direction of truncation is implementation dependent. That is,

$$6/7 = 0 \text{ and } -6/-7 = 0$$

but $-6/7$ may be zero or -1 . (Machine dependent)

Similarly, during modulo division, the sign of the result is always the sign of the first operand (the dividend). That is

```
-14 % 3 = -2
-14 % -3 = -2
14 % -3 = 2
```

EXAMPLE 1.34 The program in Fig. 1.87 shows the use of integer arithmetic to convert a given number of days into months and days.

Program

```
main ()
{
    int months, days ;

    printf("Enter days\n") ;
    scanf("%d", &days) ;

    months = days / 30 ;
    days = days % 30 ;
    printf("Months = %d Days = %d", months, days) ;
}
```

Output

```
Enter days
265
Months = 8 Days = 25
Enter days
364
Months = 12 Days = 4
Enter days
45
Months = 1 Days = 15
```

Fig. 1.87 Illustration of integer arithmetic

The variables **months** and **days** are declared as integers. Therefore, the statement

```
months = days/30;
```

truncates the decimal part and assigns the integer part to **months**. Similarly, the statement

```
days = days%30;
```


assigns the remainder part of the division to days. Thus the given number of days is converted into an equivalent number of months and days and the result is printed as shown in the output.

1.45.2 Real Arithmetic

An arithmetic operation involving only real operands is called *real arithmetic*. A real operand may assume values either in decimal or exponential notation. Since floating point values are rounded to the number of significant digits permissible, the final value is an approximation of the correct result. If **x**, **y**, and **z** are **floats**, then we will have:

$$\begin{aligned}x &= 6.0/7.0 = 0.857143 \\y &= 1.0/3.0 = 0.333333 \\z &= -2.0/3.0 = -0.666667\end{aligned}$$

The operator % cannot be used with real operands.

1.45.3 Mixed-mode Arithmetic

When one of the operands is real and the other is integer, the expression is called a *mixed-mode arithmetic* expression. If either operand is of the real type, then only the real operation is performed and the result is always a real number. Thus

$$15/10.0 = 1.5$$

whereas

$$15/10 = 1$$

More about mixed operations will be discussed later when we deal with the evaluation of expressions.

1.46 RELATIONAL OPERATORS

We often compare two quantities and depending on their relation, take certain decisions. For example, we may compare the age of two persons, or the price of two items, and so on. These comparisons can be done with the help of *relational operators*. We have already used the symbol '<', meaning 'less than'. An expression such as

$$a < b \text{ or } 1 < 20$$

containing a relational operator is termed as a *relational expression*. The value of a relational expression is either *one* or *zero*. It is *one* if the specified relation is *true* and *zero* if the relation is *false*. For example

$$10 < 20 \text{ is true}$$

but

$$20 < 10 \text{ is false}$$

C supports six relational operators in all. These operators and their meanings are shown in Table 1.19.

Table 1.19 Relational Operators

Operator	Meaning
<	is less than
<=	is less than or equal to
>	is greater than
>=	is greater than or equal to
==	is equal to
!=	is not equal to

A simple relational expression contains only one relational operator and takes the following form:

ae-1 relational operator ae-2

ae-1 and *ae-2* are arithmetic expressions, which may be simple constants, variables or combination of them. Given below are some examples of simple relational expressions and their values:

4.5 <= 10 TRUE

4.5 < -10 FALSE

-35 >= 0 FALSE

10 < 7+5 TRUE

a+b = c+d TRUE only if the sum of values of a and b is equal to the sum of values of c and d.

When arithmetic expressions are used on either side of a relational operator, the arithmetic expressions will be evaluated first and then the results compared. That is, arithmetic operators have a higher priority over relational operators.

Relational expressions are used in *decision statements* such as **if** and **while** to decide the course of action of a running program. Decision statements are discussed in detail in Chapters 8 and 9.

Relational Operator Complements

Among the six relational operators, each one is a complement of another operator.

>	is complement of	<=
<	is complement of	>=
==	is complement of	!=

We can simplify an expression involving the *not* and the *less than* operators using the complements as shown below:

Actual one	Simplified one
!(x<y)	x >= y
!(x>y)	x <= y
!(x!=y)	x == y
!(x<=y)	x > y
!(x>=y)	x < y
!(x == y)	x != y

1.47 LOGICAL OPERATORS

In addition to the relational operators, C has the following three *logical operators*.

&&	meaning logical	AND
	meaning logical	OR
!	meaning logical	NOT

The logical operators && and || are used when we want to test more than one condition and make decisions. An example is:

a > b && x == 10

An expression of this kind, which combines two or more relational expressions, is termed as a *logical expression* or a *compound relational expression*. Like the simple relational expressions, a logical expression also yields a value of *one* or *zero*, according to the truth table shown in Table 1.20. The logical expression given above is true only if **a > b** is *true* and **x == 10** is *true*. If either (or both) of them are false, the expression is *false*.

Table 1.20 Truth Table

<i>op-1</i>	<i>op-2</i>	<i>Value of the expression</i>	
		<i>op-1 && op-2</i>	<i>op-1 op-2</i>
Non-zero	Non-zero	1	1
Non-zero	0	0	1
0	Non-zero	0	1
0	0	0	0

Some examples of the usage of logical expressions are:

1. if (age > 55 && salary < 1000)
2. if (number < 0 || number > 100)

We shall see more of them when we discuss decision statements.



NOTE: Relative precedence of the relational and logical operators is as follows:

Highest	!
	> >= < <=
	== !=
	&&
Lowest	

It is important to remember this when we use these operators in compound expressions.

1.48 ASSIGNMENT OPERATORS

Assignment operators are used to assign the result of an expression to a variable. We have seen the usual assignment operator, '='. In addition, C has a set of '*shorthand*' assignment operators of the form

```
v op= exp;
```

where *v* is a variable, *exp* is an expression and *op* is a C binary arithmetic operator. The operator *op=* is known as the shorthand assignment operator.

The assignment statement

```
v op = exp;
```

is equivalent to

```
v = v op (exp);
```

with *v* evaluated only once. Consider an example

```
x += y+1;
```

This is same as the statement

```
x = x + (y+1);
```

The shorthand operator += means 'add y+1 to x' or 'increment x by y+1'. For y = 2, the above statement becomes

```
xp += 3;
```

and when this statement is executed, 3 is added to x. If the old value of x is, say 5, then the new value of x is 8. Some of the commonly used shorthand assignment operators are illustrated in Table 1.21.

Table 1.21 Shorthand Assignment Operators

<i>Statement with simple assignment operator</i>	<i>Statement with shorthand operator</i>
<code>a = a + 1</code>	<code>a += 1</code>
<code>a = a - 1</code>	<code>a -= 1</code>
<code>a = a * (n+1)</code>	<code>a *= n+1</code>
<code>a = a / (n+1)</code>	<code>a /= n+1</code>
<code>a = a % b</code>	<code>a %= b</code>

The use of shorthand assignment operators has three advantages:

1. What appears on the left-hand side need not be repeated and therefore it becomes easier to write.
2. The statement is more concise and easier to read.
3. The statement is more efficient.

These advantages may be appreciated if we consider a slightly more involved statement like

```
value(5*j-2) = value(5*j-2) + delta;
```

With the help of the `+=` operator, this can be written as follows:

```
value(5*j-2) += delta;
```

It is easier to read and understand and is more efficient because the expression `5*j-2` is evaluated only once.

EXAMPLE 1.35 Program of Fig. 1.88 prints a sequence of squares of numbers. Note the use of the shorthand operator `*=`.

The program attempts to print a sequence of squares of numbers starting from 2. The statement

```
a *= a;
```

which is identical to

```
a = a*a;
```

replaces the current value of **a** by its square. When the value of **a** becomes equal or greater than **N** (=100) the **while** is terminated. Note that the output contains only three values 2, 4 and 16.

Program

```
#define N 100
#define A 2
main()
{
    int a;
    a = A;
    while( a < N )
    {
        printf("%d\n", a);
        a *= a;
    }
}
```

Output

```
2
4
16
```

Fig. 1.88 Use of shorthand operator `*=`

1.49 INCREMENT AND DECREMENT OPERATORS

C allows two very useful operators not generally found in other languages. These are the increment and decrement operators:

++ and --

The operator ++ adds 1 to the operand, while -- subtracts 1. Both are unary operators and take the following form:

```
++m; or m++;
--m; or m--;
```

++m; is equivalent to m = m+1; (or m += 1;)
--m; is equivalent to m = m-1; (or m -= 1;)

We use the increment and decrement statements in **for** and **while** loops extensively.

While ++m and m++ mean the same thing when they form statements independently, they behave differently when they are used in expressions on the right-hand side of an assignment statement. Consider the following:

```
m = 5;
y = ++m;
```

In this case, the value of y and m would be 6. Suppose, if we rewrite the above statements as

```
m = 5;
y = m++;
```

then, the value of y would be 5 and m would be 6. *A prefix operator first adds 1 to the operand and then the result is assigned to the variable on left. On the other hand, a postfix operator first assigns the value to the variable on left and then increments the operand.*

Similar is the case, when we use ++ (or --) in subscripted variables. That is, the statement

```
a[i++] = 10;
```

is equivalent to

```
a[i] = 10;
i = i+1;
```

The increment and decrement operators can be used in complex statements. Example:

```
m = n++ -j+10;
```

Old value of n is used in evaluating the expression. n is incremented after the evaluation. Some compilers require a space on either side of n++ or ++n.

Rules for ++ and -- Operators

- Increment and decrement operators are unary operators and they require variable as their operands.
- When postfix ++ (or --) is used with a variable in an expression, the expression is evaluated first using the original value of the variable and then the variable is incremented (or decremented) by one.
- When prefix ++(or --) is used in an expression, the variable is incremented (or decremented) first and then the expression is evaluated using the new value of the variable.
- The precedence and associativity of ++ and -- operators are the same as those of unary + and unary -.

1.50 CONDITIONAL OPERATOR

A ternary operator pair “?:” is available in C to construct conditional expressions of the form

```
exp1 ? exp2 : exp3
```

where *exp1*, *exp2*, and *exp3* are expressions.

The operator `? :` works as follows: *exp1* is evaluated first. If it is nonzero (true), then the expression *exp2* is evaluated and becomes the value of the expression. If *exp1* is false, *exp3* is evaluated and its value becomes the value of the expression. Note that only one of the expressions (either *exp2* or *exp3*) is evaluated. For example, consider the following statements.

```
a = 10;
b = 15;
x = (a > b) ? a : b;
```

In this example, x will be assigned the value of b. This can be achieved using the **if..else** statements as follows:

```
if (a > b)
    x = a;
else
    x = b;
```

1.51 BITWISE OPERATORS

C has a distinction of supporting special operators known as *bitwise operators* for manipulation of data at bit level. These operators are used for testing the bits, or shifting them right or left. Bitwise operators may not be applied to **float** or **double**. Table 1.22 lists the bitwise operators and their meanings.

Table 1.22 Bitwise Operators

Operator	Meaning
&	bitwise AND
	bitwise OR
^	bitwise exclusive OR
<<	shift left
>>	shift right

1.52 SPECIAL OPERATORS

C supports some special operators of interest such as comma operator, **sizeof** operator, pointer operators (**&** and *****) and member selection operators (**.** and **->**). The comma and **sizeof** operators are discussed in this section while the pointer operators are discussed in Chapter 14. Member selection operators which are used to select members of a structure are discussed in Chapters 13 and 14.

1.52.1 The Comma Operator

The comma operator can be used to link the related expressions together. A comma-linked list of expressions are evaluated *left to right* and the value of *right-most* expression is the value of the combined expression. For example, the statement

```
value = (x = 10, y = 5, x+y);
```

first assigns the value 10 to **x**, then assigns 5 to **y**, and finally assigns 15 (i.e. 10 + 5) to **value**. Since comma operator has the lowest precedence of all operators, the parentheses are necessary. Some applications of comma operator are:

In **for** loops:

```
for ( n = 1, m = 10, n <= m; n++, m++)
```

In **while** loops:

```
while (c = getchar( ), c != '10')
```

Exchanging values:

```
t = x, x = y, y = t;
```

1.52.2 The sizeof Operator

The **sizeof** is a compile time operator and, when used with an operand, it returns the number of bytes the operand occupies. The operand may be a variable, a constant or a data type qualifier.

Examples:

```
m = sizeof (sum);
n = sizeof (long int);
k = sizeof (235L);
```

The **sizeof** operator is normally used to determine the lengths of arrays and structures when their sizes are not known to the programmer. It is also used to allocate memory space dynamically to variables during execution of a program.

EXAMPLE 1.36 In Fig. 1.89, the program employs different kinds of operators. The results of their evaluation are also shown for comparison.

Notice the way the increment operator ++ works when used in an expression. In the statement

```
c = ++a - b;
```

new value of **a** (= 16) is used thus giving the value 6 to **c**. That is, **a** is incremented by 1 before it is used in the expression. However, in the statement

```
d = b++ + a;
```

the old value of **b** (=10) is used in the expression. Here, **b** is incremented by 1 after it is used in the expression.

We can print the character % by placing it immediately after another % character in the control string. This is illustrated by the statement

```
printf("a%%b = %d\n", a%b);
```

The program also illustrates that the expression

```
c > d ? 1 : 0
```

assumes the value 0 when **c** is less than **d** and 1 when **c** is greater than **d**.

Program

```
main()
{
    int a, b, c, d;
    a = 15;
    b = 10;
    c = ++a - b;
    printf("a = %d b = %d c = %d\n", a, b, c);
    d = b++ + a;
    printf("a = %d b = %d d = %d\n", a, b, d);
    printf("a/b = %d\n", a/b);
    printf("a%%b = %d\n", a%b);
    printf("a *= b = %d\n", a*=b);
    printf("%d\n", (c>d) ? 1 : 0);
    printf("%d\n", (c<d) ? 1 : 0);
}
```

Output

```
a = 16  b = 10  c = 6
a = 16  b = 11  d = 26
a/b = 1
a%b = 5
a *= b = 176
0
1
```

Fig. 1.89 Further illustration of arithmetic operators

1.53 ARITHMETIC EXPRESSIONS

An arithmetic expression is a combination of variables, constants, and operators arranged as per the syntax of the language. We have used a number of simple expressions in the examples discussed so far. C can handle any complex mathematical expressions. Some of the examples of C expressions are shown in Table 1.23. Remember that C does not have an operator for exponentiation.

Table 1.23 Expressions

<i>Algebraic expression</i>	<i>C expression</i>
$a \times b - c$	<code>a * b - c</code>
$(m+n) \times y$	<code>(m+n) * (x+y)</code>
$\left(\frac{ab}{c}\right)$	<code>a * b/c</code>
$3x^2 + 2x + 1$	<code>3 * x * x + 2 * x + 1</code>
$\left(\frac{x}{y}\right) + c$	<code>x/y+c</code>

1.54 EVALUATION OF EXPRESSIONS

Expressions are evaluated using an assignment statement of the form:

`variable = expression;`

Variable is any valid C variable name. When the statement is encountered, the expression is evaluated first and the result then replaces the previous value of the variable on the left-hand side. All variables used in the expression must be assigned values before evaluation is attempted. Examples of evaluation statements are

```
x = a * b - c;
y = b / c * a;
z = a - b / c + d;
```

The blank space around an operator is optional and adds only to improve readability. When these statements are used in a program, the variables a, b, c, and d must be defined before they are used in the expressions.

EXAMPLE 1.37 The program in Fig. 1.90 illustrates the use of variables in expressions and their evaluation.

Output of the program also illustrates the effect of presence of parentheses in expressions. This is discussed in the next section.

Program

```
main()
{
    float a, b, c, x, y, z;
    a = 9;
    b = 12;
    c = 3;

    x = a - b / 3 + c * 2 - 1;
    y = a - b / (3 + c) * (2 - 1);
    z = a - (b / (3 + c) * 2) - 1;

    printf("x = %f\n", x);
    printf("y = %f\n", y);
    printf("z = %f\n", z);
}
```

Output

```
x = 10.000000
y = 7.000000
z = 4.000000
```

Fig. 1.90 Illustrations of evaluation of expressions

1.55 PRECEDENCE OF ARITHMETIC OPERATORS

An arithmetic expression without parentheses will be evaluated from *left to right* using the rules of precedence of operators. There are two distinct priority levels of arithmetic operators in C:

High priority * / %

Low priority + -

The basic evaluation procedure includes 'two' left-to-right passes through the expression. During the first pass, the high priority operators (if any) are applied as they are encountered. During the second pass, the low priority operators (if any) are applied as they are encountered. Consider the following evaluation statement that has been used in the program of Fig. 1.91.

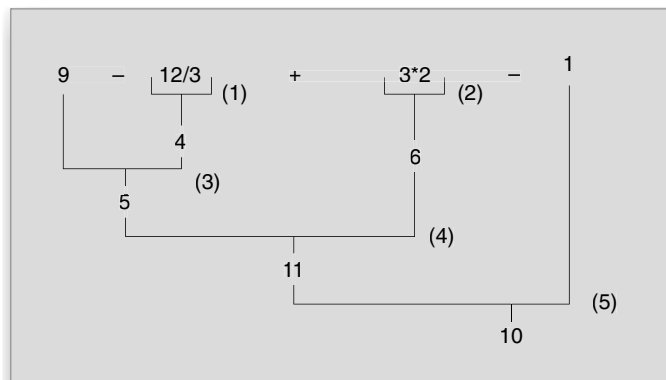


Fig. 1.91 Illustration of hierarchy of operations

$$x = a - b/3 + c * 2 - 1$$

When $a = 9$, $b = 12$, and $c = 3$, the statement becomes

$$x = 9 - 12/3 + 3 * 2 - 1$$

and is evaluated as follows

First pass

Step1: $x = 9 - 4 + 3 * 2 - 1$

Step2: $x = 9 - 4 + 6 - 1$

Second pass

Step3: $x = 5 + 6 - 1$

Step4: $x = 11 - 1$

Step5: $x = 10$

These steps are illustrated in Fig. 1.91. The numbers inside parentheses refer to step numbers.

However, the order of evaluation can be changed by introducing parentheses into the an expression. Consider the same expression with parentheses as shown below:

$$9 - 12 / (3 + 3) * (2 - 1)$$

Whenever parentheses are used, the expressions within parentheses assume highest priority. If two or more sets of parentheses appear one after another as shown above, the expression contained in the left-most set is evaluated first and the right-most in the last. Given below are the new steps.

First pass

Step 1: $9 - 12 / 6 * (2 - 1)$

Step 2: $9 - 12 / 6 * 1$

Second pass

Step 3: $9 - 2 * 1$

Step 4: $9 - 2$

Third pass

Step 5: 7

This time, the procedure consists of three left-to-right passes. However, the number of evaluation steps remains the same as 5 (i.e equal to the number of arithmetic operators).

Parentheses may be nested, and in such cases, evaluation of the expression will proceed outward from the innermost set of parentheses. Just make sure that every opening parenthesis has a matching closing parenthesis. For example

$$9 - (12 / (3 + 3) * 2) - 1 = 4$$

whereas

$$9 - ((12/3) + 3 * 2) - 1 = -2$$

While parentheses allow us to change the order of priority, we may also use them to improve understandability of the program. When in doubt, we can always add an extra pair just to make sure that the priority assumed is the one we require.

Rules for Evaluation of Expression

- First, parenthesized sub-expression from left to right are evaluated.
- If parentheses are nested, the evaluation begins with the innermost sub-expression.
- The precedence rule is applied in determining the order of application of operators in evaluating sub-expressions.
- The associativity rule is applied when two or more operators of the same precedence level appear in a sub-expression.
- Arithmetic expressions are evaluated from left to right using the rules of precedence.
- When parentheses are used, the expressions within parentheses assume highest priority.

1.56 SOME COMPUTATIONAL PROBLEMS

When expressions include real values, then it is important to take necessary precautions to guard against certain computational errors. We know that the computer gives approximate values for real numbers and the errors due to such approximations may lead to serious problems. For example, consider the following statements:

```
a = 1.0/3.0;
b = a * 3.0;
```

We know that $(1.0/3.0) \times 3.0$ is equal to 1. But there is no guarantee that the value of **b** computed in a program will equal 1.

Another problem is division by zero. On most computers, any attempt to divide a number by zero will result in abnormal termination of the program. In some cases such a division may produce meaningless results. Care should be taken to test the denominator that is likely to assume zero value and avoid any division by zero.

The third problem is to avoid overflow or underflow errors. It is our responsibility to guarantee that operands are of the correct type and range, and the result may not produce any overflow or underflow.

EXAMPLE 1.38 Output of the program in Fig. 1.92 shows round-off errors that can occur in computation of floating point numbers.

Program

```
/*----- Sum of n terms of 1/n -----*/
main()
{
    float sum, n, term ;
    int count = 1 ;
    sum = 0 ;
    printf("Enter value of n\n") ;
    scanf("%f", &n) ;
    term = 1.0/n ;
    while( count <= n )
    {
        sum = sum + term ;
        count++ ;
    }
    printf("Sum = %f\n", sum) ;
}
```

Output

```
Enter value of n
99
Sum = 1.000001
Enter value of n
143
Sum = 0.999999
```

Fig. 1.92 Round-off errors in floating point computations

We know that the sum of n terms of $1/n$ is 1. However, due to errors in floating point representation, the result is not always 1.

1.57 TYPE CONVERSIONS IN EXPRESSIONS

1.57.1 Implicit Type Conversion

C permits mixing of constants and variables of different types in an expression. C automatically converts any intermediate values to the proper type so that the expression can be evaluated without losing any significance. This automatic conversion is known as *implicit type conversion*.

During evaluation it adheres to very strict rules of type conversion. If the operands are of different types, the 'lower' type is automatically converted to the 'higher' type before the operation proceeds. The result is of the higher type. A typical type conversion process is illustrated in Fig. 1.93.

Given below is the sequence of rules that are applied while evaluating expressions.

All **short** and **char** are automatically converted to **int**; then

1. if one of the operands is **long double**, the other will be converted to **long double** and the result will be **long double**;
2. else, if one of the operands is **double**, the other will be converted to **double** and the result will be **double**;
3. else, if one of the operands is **float**, the other will be converted to **float** and the result will be **float**;
4. else, if one of the operands is **unsigned long int**, the other will be converted to **unsigned long int** and the result will be **unsigned long int**;
5. else, if one of the operands is **long int** and the other is **unsigned int**, then
 - (a) if **unsigned int** can be converted to **long int**, the **unsigned int** operand will be converted as such and the result will be **long int**;
 - (b) else, both operands will be converted to **unsigned long int** and the result will be **unsigned long int**;
6. else, if one of the operands is **long int**, the other will be converted to **long int** and the result will be **long int**;
7. else, if one of the operands is **unsigned int**, the other will be converted to **unsigned int** and the result will be **unsigned int**.


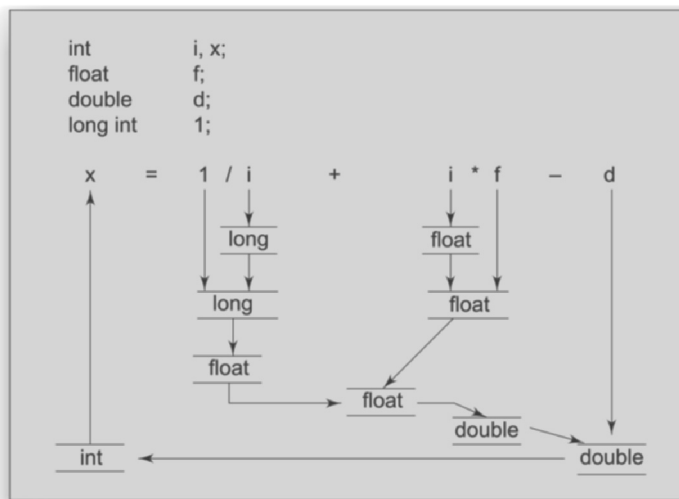


Fig. 1.93 Process of implicit type conversion

Conversion Hierarchy

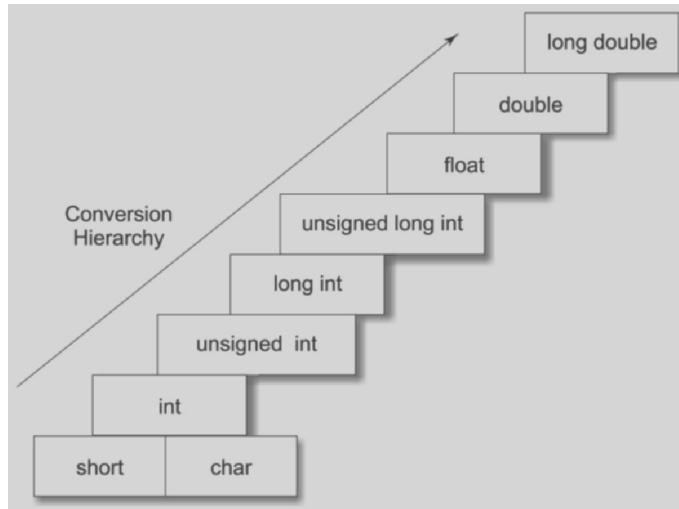Note that, C uses the rule that, in all expression except assignments, any implicit type conversion are made from a lower size type to a higher size type as shown below:



Note that some versions of C automatically convert all floating-point operands to double precision.

The final result of an expression is converted to the type of the variable on the left of the assignment sign before assigning the value to it. However, the following changes are introduced during the final assignment.

1. **float** to **int** causes truncation of the fractional part.
2. **double** to **float** causes rounding of digits.
3. **long int** to **int** causes dropping of the excess higher order bits.

1.57.2 Explicit Type Conversion

We have just discussed how C performs type conversion automatically. However, there are instances when we want to force a type conversion in a way that is different from the automatic conversion. Consider, for example, the calculation of ratio of females to males in a town.

```
ratio = female_number/male_number
```

Since **female_number** and **male_number** are declared as integers in the program, the decimal part of the result of the division would be lost and **ratio** would represent a wrong figure. This problem can be solved by converting locally one of the variables to the floating point as shown below:

```
ratio = (float) female_number/male_number
```

The operator **(float)** converts the **female_number** to floating point for the purpose of evaluation of the expression. Then using the rule of automatic conversion, the division is performed in floating point mode, thus retaining the fractional part of result.

Note that in no way does the operator **(float)** affect the value of the variable **female_number**. And also, the type of **female_number** remains as **int** in the other parts of the program.

The process of such a local conversion is known as *explicit conversion* or *casting a value*. The general form of a cast is:

```
(type-name)expression
```

1.114 Computer Programming

where *type-name* is one of the standard C data types. The expression may be a constant, variable or an expression. Some examples of casts and their actions are shown in Table 1.24.

Table 1.24 Use of Casts

<i>Example</i>	<i>Action</i>
<code>x = (int) 7.5</code>	7.5 is converted to integer by truncation.
<code>a = (int) 21.3/(int)4.5</code>	Evaluated as 21/4 and the result would be 5.
<code>b = (double)sum/n</code>	Division is done in floating point mode.
<code>y = (int) (a+b)</code>	The result of a+b is converted to integer.
<code>z = (int)a+b</code>	a is converted to integer and then added to b.
<code>p = cos((double)x)</code>	Converts x to double before using it.

Casting can be used to round-off a given value. Consider the following statement:

`x = (int) (y+0.5);`

If *y* is 27.6, *y*+0.5 is 28.1 and on casting, the result becomes 28, the value that is assigned to *x*. Of course, the expression, being cast is not changed.

EXAMPLE 1.39 Figure 1.94 shows a program using a cast to evaluate the equation $SUM = \sum_{i=1}^n (1/i)$

Program

```
main()
{
    float sum ;
    int n ;
    sum = 0 ;
    for( n = 1 ; n <= 10 ; ++n )
    {
        sum = sum + 1/(float)n ;
        printf("%2d %6.4f\n", n, sum) ;
    }
}
```

Output

```
1  1.0000
2  1.5000
3  1.8333
4  2.0833
5  2.2833
6  2.4500
7  2.5929
8  2.7179
9  2.8290
10 2.9290
```

Fig. 1.94 Use of a cast

1.58 OPERATOR PRECEDENCE AND ASSOCIATIVITY

As mentioned earlier each operator, in C has a precedence associated with it. This precedence is used to determine how an expression involving more than one operator is evaluated. There are distinct *levels of precedence* and an operator may belong to one of these levels. The operators at the higher level of precedence are evaluated first. The operators of the same precedence are evaluated either from 'left to right' or from 'right to left', depending on the level. This is known as the *associativity* property of an operator. Table 1.25 provides a complete list of operators, their precedence levels, and their rules of association. The groups are listed in the order of decreasing precedence. Rank 1 indicates the highest precedence level and 15 the lowest. The list also includes those operators, which we have not yet discussed.

It is very important to note carefully, the order of precedence and associativity of operators. Consider the following conditional statement:

```
if (x == 10 + 15 && y < 10)
```

The precedence rules say that the **addition** operator has a higher priority than the logical operator (&&) and the relational operators (== and <). Therefore, the addition of 10 and 15 is executed first. This is equivalent to:

```
if (x == 25 && y < 10)
```

The next step is to determine whether **x** is equal to 25 and **y** is less than 10. If we assume a value of 20 for **x** and 5 for **y**, then

```
x == 25 is FALSE (0)
```

```
y < 10 is TRUE (1)
```

Note that since the operator < enjoys a higher priority compared to ==, **y < 10** is tested first and then **x == 25** is tested.

Finally we get:

```
if (FALSE && TRUE)
```

Because one of the conditions is FALSE, the complex condition is FALSE.

In the case of &&, it is guaranteed that the second operand will not be evaluated if the first is zero and in the case of ||, the second operand will not be evaluated if the first is non-zero.

Table 1.25 Summary of C Operators

Operator	Description	Associativity	Rank
()	Function call	Left to right	1
[]	Array element reference		
+	Unary plus		
-	Unary minus	Right to left	2
++	Increment		
--	Decrement		
!	Logical negation		
~	Ones complement		
*	Pointer reference (indirection)		
&	Address		
sizeof	Size of an object		
(type)	Type cast (conversion)		
*	Multiplication	Left to right	3

1.116 Computer Programming

/	Division		
%	Modulus		
+	Addition	Left to right	4
-	Subtraction		
<<	Left shift	Left to right	5
>>	Right shift		
<	Less than	Left to right	6
<=	Less than or equal to		
>	Greater than		
>=	Greater than or equal to		
==	Equality	Left to right	7
!=	Inequality		
&	Bitwise AND	Left to right	8
^	Bitwise XOR	Left to right	9
	Bitwise OR	Left to right	10
&&	Logical AND	Left to right	11
	Logical OR	Left to right	12
?:	Conditional expression	Right to left	13
=	Assignment operators	Right to left	14
* = /= %=			
+= -= &=			
^= =			
<<= >>=			
,	Comma operator	Left to right	15

Rules of Precedence and Associativity

- Precedence rules decides the order in which different operators are applied
- Associativity rule decides the order in which multiple occurrences of the same level operator are applied

1.59 MATHEMATICAL FUNCTIONS

Mathematical functions such as cos, sqrt, log, etc. are frequently used in analysis of real-life problems. Most of the C compilers support these basic math functions. However, there are systems that have a more comprehensive math library and one should consult the reference manual to find out which functions are available. Table 1.26 lists some standard math functions.

Table 1.26 Math functions

Function	Meaning
Trigonometric	
acos(x)	Arc cosine of x
asin(x)	Arc sine of x
atan(x)	Arc tangent of x
atan 2(x,y)	Arc tangent of x/y

<code>cos(x)</code>	Cosine of x
<code>sin(x)</code>	Sine of x
<code>tan(x)</code>	Tangent of x
Hyperbolic	
<code>cosh(x)</code>	Hyperbolic cosine of x
<code>sinh(x)</code>	Hyperbolic sine of x
<code>tanh(x)</code>	Hyperbolic tangent of x
Other functions	
<code>ceil(x)</code>	x rounded up to the nearest integer
<code>exp(x)</code>	e to the x power (e^x)
<code>fabs(x)</code>	Absolute value of x.
<code>floor(x)</code>	x rounded down to the nearest integer
<code>fmod(x,y)</code>	Remainder of x/y
<code>log(x)</code>	Natural log of x, $x > 0$
<code>log10(x)</code>	Base 10 log of x, $x > 0$
<code>pow(x,y)</code>	x to the power y (x^y)
<code>sqrt(x)</code>	Square root of x, $x \geq 0$

- Note:**
1. **x** and **y** should be declared as **double**.
 2. In trigonometric and hyperbolic functions, **x** and **y** are in radians.
 3. All the functions return a **double**.
 4. C99 has added **float** and **long double** versions of these functions.
 5. C99 has added many more mathematical functions.
 6. See the Appendix "C99 Features" for details.

As pointed out earlier, to use any of these functions in a program, we should include the line:

include <math.h>

in the beginning of the program.

Just Remember

- All the devices that expand the capabilities of a computer in some way are termed as peripheral devices. Examples: printer, plotter, disk drive, speaker, microphone, etc.
- Cache memory has the fastest access time followed by RAM, and secondary storage devices.
- High-level language is the most user-friendly, followed by assembly and machine language.
- Machine-level language is the most efficient followed by assembly and high-level language.
- It is always advisable to first create the algorithm and then the actual program. It helps to develop the code in a more systematic manner which is less error-prone.
- It is always advisable to test a program in varied test scenarios so as to ensure that there is no prevalence of any semantic error.
- Describing the process step-by-step is called as **algorithm**.
- Representing the various steps in the form of a diagram is called as **flow chart**.
- **Parallel computing** was developed to speed up things and ultimately try to imitate human actions in **artificial intelligence**.
- Sequence involves a series of steps that we perform one after the other.
- Selection involves making a choice from multiple available options.
- Iteration involves performing repetitive tasks.
- The above three basic categories of activities combined in different ways can form the basis for describing *any* algorithm.
- Programs without go to statements are easy to understand and therefore, easy to maintain.
- We can combine two or more conditions into a single **compound condition**.
- Putting an *if* within another *if* forms a **nested condition**.
- It is always a good practice to do a walkthrough of an algorithm with a variety of values.
- The process of removing a bug from an algorithm is called as **debugging**.
- Every C program requires a **main()** function (Use of more than one **main()** is illegal). The place **main** is where the program execution begins.
- The execution of a function begins at the opening brace of the function and ends at the corresponding closing brace.
- C programs are written in lowercase letters. However, uppercase letters are used for symbolic names and output strings.
- All the words in a program line must be separated from each other by at least one space, or a tab, or a punctuation mark.
- Every program statement in a C language must end with a semicolon.
- All variables must be declared for their types before they are used in the program.
- We must make sure to include header files using **#include** directive when the program refers to special names and functions that it does not define.
- Compiler directives such as **define** and **include** are special instructions to the compiler to help it compile a program. They do not end with a semicolon.
- The sign **#** of compiler directives must appear in the first column of the line.
- When braces are used to group statements, make sure that the opening brace has a corresponding closing brace.
- C is a free-form language and therefore a proper form of indentation of various sections would improve legibility of the program.
- A comment can be inserted almost anywhere a space can appear. Use of appropriate comments in proper places increases readability and understandability of the program and helps users in debugging and testing. Remember to match the symbols **/*** and ***/** appropriately.
- C is the best suited programming language for systems programming.
- C is a procedural language and not object-oriented.

- If no explicit return type is specified then a function takes void as the default return type.
- It is always advisable to use format specifiers so as to generate the output in a well-formatted form.
- Alt + R is the shortcut for running a program in C.
- Do not use the underscore as the first character of identifiers (or variable names) because many of the identifiers in the system library start with underscore.
- Use only 31 or less characters for identifiers. This helps ensure portability of programs.
- Do not use keywords or any system library names for identifiers.
- Use meaningful and intelligent variable names.
- Do not create variable names that differ only by one or two letters.
- Each variable used must be declared for its type at the beginning of the program or function.
- All variables must be initialized before they are used in the program.
- Integer constants, by default, assume **int** types. To make the numbers **long** or **unsigned**, we must append the letters L and U to them.
- Floating point constants default to **double**. To make them to denote **float** or **long double**, we must append the letters F or L to the numbers.
- Do not use lowercase l for long as it is usually confused with the number 1.
- Use single quote for character constants and double quotes for string constants.
- A character is stored as an integer. It is therefore possible to perform arithmetic operations on characters.
- Do not combine declarations with executable statements.
- A variable can be made constant either by using the preprocessor command **#define** at the beginning of the program or by declaring it with the qualifier **const** at the time of initialization.
- Do not use semicolon at the end of **#define** directive.
- The character # should be in the first column.
- Do not give any space between # and **define**.
- C does not provide any warning or indication of overflow. It simply gives incorrect results. Care should be exercised in defining correct data type.
- A variable defined before the main function is available to all the functions in the program.
- A variable defined inside a function is local to that function and not available to other functions.
- Variable names can not have any special symbols except underscore.
- The limitation of a keyboard for supporting some special characters can be removed with the help of trigraph sequences.
- No whitespace is permitted between any identifier or keyword.
- Typedef is a very useful keyword for user-defined type declarations particularly in large programs where declarations are required to be made frequently.
- Symbolic constants serve the purpose of changing a particular value at all its instances in the program, at once.
- While using **getchar** function, care should be exercised to clear any unwanted characters in the input stream.
- Do not forget to include **<stdio.h>** headerfiles when using functions from standard input/output library.
- Do not forget to include **<ctype.h>** header file when using functions from character handling library.
- Provide proper field specifications for every variable to be read or printed.
- Enclose format control strings in double quotes.
- Do not forget to use address operator **&** for basic type variables in the input list of **scanf**.
- Use double quotes for character string constants.
- Use single quotes for single character constants.
- Provide sufficient field to handle a value to be printed.
- Be aware of the situations where output may be imprecise due to formatting.

- Do not specify any precision in input field specifications.
 - Do not provide any white-space at the end of format string of a **scanf** statement.
 - Do not forget to close the format string in the **scanf** or **printf** statement with double quotes.
 - Using an incorrect conversion code for data type being read or written will result in runtime error.
 - Do not forget the comma after the format string in **scanf** and **printf** statements.
 - Not separating read and write arguments is an error.
 - Do not use commas in the format string of a **scanf** statement.
 - Using an address operator & with a variable in the **printf** statement will result in runtime error.
 - Use %[] for reading blank spaces.
 - Always provide complete field specifications corresponding to all the variables to be read in the scanf function call.
 - Use %o for printing an octal integer and %x for printing a hexadecimal number.
 - Use L for long double conversion.
 - Use the 0 flag for causing leading zeros to appear in the output.
 - Use *decrement* and *increment* operators carefully. Understand the difference between postfix and prefix operations before using them.
 - Add parentheses wherever you feel they would help to make the evaluation order clear.
 - Be aware of side effects produced by some expressions.
 - Avoid any attempt to divide by zero. It is normally undefined. It will either result in a fatal error or in incorrect results.
 - Do not forget a semicolon at the end of an expression.
 - Understand clearly the precedence of operators in an expression. Use parentheses, if necessary.
 - Associativity is applied when more than one operator of the same precedence are used in an expression. Understand which operators associate from right to left and which associate from left to right.
 - Do not use *increment* or *decrement* operators with any expression other than a *variable identifier*.
 - It is illegal to apply modulus operator % with anything other than integers.
 - Do not use a variable in an expression before it has been assigned a value.
 - Integer division always truncates the decimal part of the result. Use it carefully. Use casting where necessary.
 - The result of an expression is converted to the type of the variable on the left of the assignment before assigning the value to it. Be careful about the loss of information during the conversion.
 - All mathematical functions implement *double* type parameters and return *double* type values.
 - It is an error if any space appears between the two symbols of the operators ==, !=, <= and >=.
 - It is an error if the two symbols of the operators !=, <= and >= are reversed.
 - Use spaces on either side of binary operator to improve the readability of the code.
 - Do not use increment and decrement operators to floating point variables.
 - Do not confuse the equality operator == with the assignment operator =.
 - Always remember that relational operators result in either 0 or 1.
 - Use the bitwise operators carefully as they directly operate on bits.
 - Remember that *, /, and % have higher priority than + and -.
 - Remember that arithmetic operators are operated from left to right using the precedence rules.
 - Understand the implicit type conversion hierarchy properly so as to avoid getting unexpected results.
-

Multiple Choice Questions

1. Which of the following is used to perform computations on the entered data?
(a) Memory (b) Processor
(c) Input device (d) Output device
2. Which of the following is not an input device?
(a) Plotter (b) Scanner
(c) Keyboard (d) Mouse
3. Which of the following is not an output device?
(a) Plotter (b) Scanner
(c) Printer (d) Speaker
4. Which of the following is used as a primary memory of the computer?
(a) Magnetic storage device
(b) RAM
(c) Optical storage device
(d) Magneto-optical storage device
5. Which of the following is used as a secondary memory of the computer?
(a) Magnetic storage device
(b) RAM
(c) Cache memory
(d) ROM
6. Which of the following is defined as a computer program for performing a particular task on the computer system?
(a) Hardware (b) Software
(c) Processor (d) Memory
7. Which type of operating system allows more than one program to run at the same time in a computer system?
(a) Multi-threading operating system
(b) Interactive operating system
(c) Multi-user operating system
(d) Multi-tasking operating system
8. Which one of the following converts assembly language into machine language?
(a) Interpreter (b) Compiler
(c) Assembler (d) Algorithm
9. In which of the following languages, the instructions are written in the form of 0s and 1s?
(a) Assembly language
(b) Programming language
(c) High-level language
(d) Machine language
10. Which one of the following is known as the 'language of the computer'?
(a) Programming language
(b) High-level language
(c) Machine language
(d) Assembly language
11. What are the three main categories of high-level language?
(a) Low-level languages
(b) Procedure oriented languages
(c) Mechanical languages
(d) Natural languages
(e) Problem oriented languages
12. Which of the following is not a translator program?
(a) Linker (b) Assembler
(c) Compiler (d) Interpreter
13. Any C program
(a) Must contain at least one function
(b) Need not contain any function
(c) Needs input data
(d) None of the above
14. In which year C language was developed?
(a) 1951 (b) 1962
(c) 1972 (d) 1947
15. Which one of the following is appropriate to describe the C language?
(a) Structured language
(b) Object-oriented language
(c) Machine language
(d) Assembly language
16. What is the number of keywords reserved in C language?
(a) 45 (b) 30
(c) 32 (d) 24
17. The execution of a program written in a C language begins at:
(a) `main()`
(b) `scanf()`
(c) `printf()`
(d) `#include<iostream.h>`

1.122 *Computer Programming*

18. Which one of the following is an example of a valid file name in C language?
(a) system (b) system.c
(c) system.cpp (d) system.java
19. Which of the following is the correct syntax for the printf statement?
(a) printf('Hello world');
(b) printf("Hello world")
(c) printf("Hello world");
(d) printf{'Hello world'};
20. What does %6.2f format specification signify?
(a) A normal floating point number
(b) A floating point number with six places in all and two places to the right of decimal
(c) A floating point number with eight places in all and two places to the right of decimal
(d) None of the above
21. Which of the following is an example of a free-form language?
(a) FORTRAN (b) COBOL
(c) C (d) None of the above
22. Which of the following are UNIX editors?
(a) vi (b) ed
(c) Edit! (d) Notepad
23. Which of the following is an intermediary file generated during the execution of a C program?
(a) .c (b) .obj
(c) .exe (d) .bak
24. Which of the following will run successfully in C?
(a) main()
 {
 printf(" Hello world");
 }
(b) main()
 { printf(" Hello world"); }
(c) main() {printf(" Hello world");}
(d) All of the above
25. Which of the following is the correct form of writing comments?
(a) /* comment */ (b) /* comment /*
(c) */ comment /* (d) */comment */
26. Which one of the following does not fall under the category of integer constants?
(a) 999 (b) 0 (c) +719
(d) -210 (e) 1,35,000
27. Which one of the following is not a real constant?
(a) 15.25 (b) 0.962
(c) 10 (d) +24.85
28. Which one of the following is a string constant?
(a) '5' (b) "hello"
(c) 25 (d) None of the above
29. Which one of the following does not represent a variable?
(a) % (b) height
(c) xyl (d) m_width
30. The range of values for a char data type is
(a) -128 to 127
(b) 3.4e-38 to 3.4e+38
(c) 1.7e-308 to 1.7e+308
(d) -32,768 to 32,768
31. Which one of the following is a floating-point data type?
(a) int (b) long int
(c) double (d) None of the above
32. Which command is used for reading data from keyboard in C language?
(a) cout (b) cin
(c) printf () (d) scanf ()
33. Which one of the following commands is used for the purpose of displaying output in C language?
(a) scanf ()
(b) printf ()
(c) system.out.println ()
(d) None of the above
34. Which of the following is the trigraph sequence for representing #?
(a) ??= (b) ??-
(c) ??((d) v??>
35. Which of the following is not a C keyword?
(a) typedef (b) volatile
(c) register (d) class
36. Which of the following is a legible variable name?
(a) income_tax (b) income-tax
(c) income.tax (d) income,tax

37. Constants are broadly divided into two categories _____ and _____.
 (a) numeric, string
 (b) integer, string
 (c) numeric, character
 (d) integer, character
38. For the real number 3.265e4, which of the following is correct?
 (a) mantissa -3.265, exponent 4
 (b) mantissa -4, exponent 3.265
 (c) mantissa -3, exponent -4
 (d) mantissa .3265, exponent -4
39. Which of the following is not a string?
 (a) "S"
 (b) 'S'
 (c) "\\S\\"
 (d) All of the above are strings
40. Which of the following can not be used for declaring integer type variables?
 (a) int
 (b) short int
 (c) long int
 (d) double int
41. Which of the following is the correct range for data type double?
 (a) 1.7E-308 to 1.7E+308
 (b) 1.7E-318 to 1.7E+318
 (c) 3.4E-4932 to 1.1E+4932
 (d) 3.4E-38 to 3.4E+38
42. Which of the following storage class variable declaration leads to fastest memory access?
 (a) auto
 (b) static
 (c) extern
 (d) register
43. Which of the following is not a predefined C header file?
 (a) math.h
 (b) conio.h
 (c) scientific.h
 (d) ctype.h
44. Which of the following function is suitable for reading one character at a time?
 (a) scanf
 (b) getch
 (c) getch
 (d) gets
45. Which of the following function is suitable for displaying one character at a time?
 (a) printf
 (b) putchar
 (c) putch
 (d) puts
46. Which of the following is used to determine whether a character is in lowercase?
 (a) islower
 (b) islow
 (c) islowercase
 (d) isupper
47. ispunct(c) does which of the following:
 (a) Determines whether c is a punctuation character
 (b) Determines whether c is a printable character
 (c) Determines whether c is a special character
 (d) None of the above
48. What does 2 signify in the statement scanf("%2d ", &num);
 (a) Read two digit decimal numbers
 (b) Read a real number with two places to the right
 (c) Read two decimal numbers simultaneously
 (d) None of the above
49. While reading a string what does %wc signify?
 (a) Read w-character string
 (b) Read (w-1) character string
 (c) Read a string and upon encountering 'return', embed blank spaces till wth place
 (d) None of the above
50. Which of the following will not read an integer number?
 (a) %d
 (b) %f
 (c) %ld
 (d) %c
51. Which of the following is used for reading a hexadecimal number?
 (a) %i
 (b) %x
 (c) %d
 (d) %u
52. What will be the output of printf("%08d\n", n); if n=123
 (a) 00000123
 (b) 00000000123
 (c) 123
 (d) None of the above
53. Which of the following flags are used for left-justifying the output with in the field?
 (a) +
 (b) -
 (c) 0
 (d) None of the above
54. Character test functions are present in which of the following header files?
 (a) conio.h
 (b) stdio.h
 (c) ctype.h
 (d) None of the above
55. Which of the following is not an arithmetic operator?
 (a) +
 (b) -
 (c) *
 (d) &

56. Which of the following operators are used for obtaining the remainder in a division operation?
 (a) / (b) %
 (c) ! (d) None of the above
57. Which of the following is the relational operator for 'not equal to'?
 (a) ! (b) !=
 (c) != (d) !=
58. Which of the following is the correct statement for computing logical AND?
 (a) a<b & x>y (b) a<b && x>y
 (c) a<b AND x>y (d) None of the above
59. Which of the following is true?
 (a) ! has higher priority than !=
 (b) || has higher priority than &&
 (c) == has higher priority than <=
 (d) >= has higher priority than <=
60. a +=1 will result in:
 (a) a = a + a (b) a = a+1
 (c) a = 1+1 (d) a = a + (a+1)
61. In which of the following, the expression is evaluated first and then the variable is incremented?
 (a) a++ (b) ++a
62. Which of the following is the correct syntax for ternary operator "? :"?
 (a) exp1 ? exp2 ::exp3
 (b) exp1 ? exp2 :exp3
 (c) exp1 : exp2 ?exp3
 (d) None of the above
63. Which of the following is the bitwise left shift operator?
 (a) < (b) <<
 (c) <<< (d) ^
64. How will a=(int)32.2/(int)4.3 be evaluated?
 (a) 32.3/4.3 (b) 32/4
 (c) 32.0/4.0 (d) None of the above
65. Which of the following has the highest precedence?
 (a) [] (b) ()
 (c) { } (d) ++
66. Which of the following has the lowest precedence?
 (a) <= (b) !
 (c) , (d) ?:
67. Which of the following is not a math function?
 (a) asin (b) acos
 (c) pow (d) sizeof
68. c= ++a – b will result in which of the following (if a=10, b=5):
 (a) 5 (b) 6
 (c) 7 (d) -6
69. Logical NOT operator is represented by which of the following?
 (a) || (b) !
 (c) !! (d) NOT

Case Study

1. Calculation of Average of Numbers

A program to calculate the average of a set of N numbers is given in Fig. 1.95.

```

Program
#define N      10                /* SYMBOLIC CONSTANT */
main()
{
    int count ;                  /* DECLARATION OF */
    float sum, average, number ; /* VARIABLES */
    sum = 0 ;                    /* INITIALIZATION */
    count = 0 ;                  /* OF VARIABLES */
    while( count < N )
    {
        scanf("%f", &number) ;
        sum = sum + number ;
    }
}

```

Cont'd


```

        count = count + 1 ;
    }
    average = sum/N ;
    printf("N = %d Sum = %f", N, sum);
    printf(" Average = %f", average);
}

```

Output

```

1
2.3
4.67
1.42
7
3.67
4.08
2.2
4.25
8.21
N = 10    Sum = 38.799999    Average = 3.880

```

Fig. 1.95 Average of N numbers

The variable **number** is declared as **float** and therefore it can take both integer and real numbers. Since the symbolic constant **N** is assigned the value of 10 using the **#define** statement, the program accepts ten values and calculates their sum using the **while** loop. The variable **count** counts the number of values and as soon as it becomes 11, the **while** loop is exited and then the average is calculated.

Notice that the actual value of sum is 38.8 but the value displayed is 38.799999. In fact, the actual value that is displayed is quite dependent on the computer system. Such an inaccuracy is due to the way the floating point numbers are internally represented inside the computer.

2. Temperature Conversion Problem

The program presented in Fig. 1.96 converts the given temperature in fahrenheit to celsius using the following conversion formula:

$$C = \frac{F - 32}{1.8}$$

Program

```

#define F_LOW    0          /* - - - - - */
#define F_MAX    250        /* SYMBOLIC CONSTANTS */
#define STEP     25         /* - - - - - */
main()
{
    typedef float REAL ;          /* TYPE DEFINITION */
    REAL fahrenheit, celsius ;    /* DECLARATION */
    fahrenheit = F_LOW ;          /* INITIALIZATION */
    printf("Fahrenheit Celsius\n\n") ;
    while( fahrenheit <= F_MAX )
    {
        celsius = ( fahrenheit - 32.0 ) / 1.8 ;
        printf(" %5.1f %7.2f\n", fahrenheit, celsius);
        fahrenheit = fahrenheit + STEP ;
    }
}

```

Output

Fahrenheit	Celsius
0.0	-17.78
25.0	-3.89
50.0	10.00
75.0	23.89
100.0	37.78
125.0	51.67
150.0	65.56
175.0	79.44
200.0	93.33
225.0	107.22
250.0	121.11

Fig. 1.96 Temperature conversion-fahrenheit-celsius

The program prints a conversion table for reading temperature in celsius, given the fahrenheit values. The minimum and maximum values and step size are defined as symbolic constants. These values can be changed by redefining the **#define** statements. An user-defined data type name **REAL** is used to declare the variables fahrenheit and celsius.

The formation specifications **%5.1f** and **%7.2** in the second **printf** statement produces two-column output as shown.

3. Inventory Report

Problem: The ABC Electric Company manufactures four consumer products. Their inventory position on a particular day is given below:

<i>Code</i>	<i>Quantity</i>	<i>Rate (Rs)</i>
F105	275	575.00
H220	107	99.95
I019	321	215.50
M315	89	725.00

It is required to prepare the inventory report table in the following format:

INVENTORY REPORT			
<i>Code</i>	<i>Quantity</i>	<i>Rate</i>	<i>Value</i>
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
Total Value:			—

The value of each item is given by the product of quantity and rate.

Program: The program given in Fig. 1.97 reads the data from the terminal and generates the required output. The program uses subscripted variables which are discussed in Chapter 10.

Program

```

#define ITEMS 4
main()
{ /* BEGIN */
    int i, quantity[5];
    float rate[5], value, total_value;
    char code[5][5];
    /* READING VALUES */
    i = 1;
    while ( i <= ITEMS)
    {
        printf("Enter code, quantity, and rate:");
        scanf("%s %d %f", code[i], &quantity[i],&rate[i]);
        i++;
    }
    /*.....Printing of Table and Column Headings.....*/
    printf("\n\n");
    printf(" INVENTORY REPORT \n");
    printf("-----\n");
    printf(" Code Quantity Rate Value \n");
    printf("-----\n");
    /*.....Preparation of Inventory Position.....*/
    total_value = 0;
    i = 1;
    while ( i <= ITEMS)
    {
        value = quantity[i] * rate[i];
        printf("%5s %10d %10.2f %e\n",code[i],quantity[i],
        rate[i],value);
        total_value += value;
        i++;
    }
    /*.....Printing of End of Table.....*/
    printf("-----\n");
    printf("Total Value = %e\n",total_value);
    printf("-----\n");
} /* END */

```

Output

```

Enter code, quantity, and rate:F105 275 575.00
Enter code, quantity, and rate:H220 107 99.95
Enter code, quantity, and rate:I019 321 215.50
Enter code, quantity, and rate:M315 89 725.00

```

INVENTORY REPORT			
Code	Quantity	Rate	Value
F105	275	575.00	1.581250e+005
H220	107	99.95	1.069465e+004
I019	321	215.50	6.917550e+004
M315	89	725.00	6.452500e+004
Total Value =			3.025202e+005

Fig. 1.97 Program for inventory report


```

| *****#
| *****#
| *****#
| *****#
| *****#
| *****#

```

Fig. 1.98 Program to draw reliability graph

Program: The program given in Fig. 1.98 produces a shaded graph. The values of t are self-generated by the **for** statement

```
for(t=0; t <= 3000; t = t+150)
```

in steps of 150. The integer 50 in the statement

```
R = (int)(50*r+0.5)
```

is a scale factor which converts r to a large value where an integer is used for plotting the curve. Remember r is always less than 1.

5. Salesman's Salary

A computer manufacturing company has the following monthly compensation policy to their sales-persons:

Minimum base salary	:	1500.00
Bonus for every computer sold	:	200.00
Commission on the total monthly sales	:	2 per cent

Since the prices of computers are changing, the sales price of each computer is fixed at the beginning of every month. A program to compute a sales-person's gross salary is given in Fig. 1.99.

Program

```

#define BASE_SALAR 1500.00
#define BONUS_RATE 200.00
#define COMMISSION 0.02
main()
{
    int quantity ;
    float gross_salary, price ;
    float bonus, commission ;
    printf("Input number sold and price\n") ;
    scanf("%d %f", &quantity, &price) ;
    bonus = BONUS_RATE * quantity ;
    commission = COMMISSION * quantity * price ;
    gross_salary = BASE_SALAR + bonus + commission ;
    printf("\n");
    printf("Bonus = %6.2f\n", bonus) ;
    printf("Commission = %6.2f\n", commission) ;
    printf("Gross salary = %6.2f\n", gross_salary) ;
}

```

Output

```

Input number sold and price
5 20450.00
Bonus           = 1000.00
Commission      = 2045.00
Gross salary    = 4545.00

```

Fig. 1.99 Program of salesman's salary

Given the base salary, bonus, and commission rate, the inputs necessary to calculate the gross salary are, the price of each computer and the number sold during the month.

The gross salary is given by the equation:

Gross salary = base salary + (quantity * bonus rate) + (quantity * Price) * commission rate

6. Solution of the Quadratic Equation

An equation of the form

$$ax^2 + bx + c = 0$$

is known as the *quadratic equation*. The values of x that satisfy the equation are known as the *roots* of the equation. A quadratic equation has two roots which are given by the following two formulae:

$$\text{root 1} = \frac{-b + \sqrt{b^2 - 4ac}}{2a}$$

$$\text{root 2} = \frac{-b - \sqrt{b^2 - 4ac}}{2a}$$

A program to evaluate these roots is given in Fig. 1.100. The program requests the user to input the values of **a**, **b** and **c** and outputs **root 1** and **root 2**.

Program

```
#include <math.h>
main()
{
    float a, b, c, discriminant,
    root1, root2;
    printf("Input values of a, b, and c\n");
    scanf("%f %f %f", &a, &b, &c);
    discriminant = b*b - 4*a*c ;
    if(discriminant < 0)
        printf("\n\nROOTS ARE IMAGINARY\n");
    else
    {
        root1 = (-b + sqrt(discriminant))/(2.0*a);
        root2 = (-b - sqrt(discriminant))/(2.0*a);
        printf("\n\nRoot1 = %5.2f\n\nRoot2 = %5.2f\n",
            root1, root2 );
    }
}
```

Output

```
Input values of a, b, and c
2 4 -16
Root1 = 2.00
Root2 = -4.00
Input values of a, b, and c
1 2 3
```

ROOTS ARE IMAGINARY

Fig. 1.100 Solution of a quadratic equation

The term (b^2-4ac) is called the *discriminant*. If the discriminant is less than zero, its square roots cannot be evaluated. In such cases, the roots are said to be imaginary numbers and the program outputs an appropriate message.

Review Questions

- 1.1 State whether the following statements are *true* or *false*.
 - (a) The alphanumeric keys are the keys that help perform a specific task such as searching a file or refreshing the Web pages.
 - (b) Dot matrix printers are slower than inkjet printers and are used to generate high quality photographic prints.
- 1.2 Fill in the blanks with appropriate words in the following statement.
 - (a) The _____ keys include the number keys and the alphabet keys.
- 1.3 What are input devices? Briefly explain some popular input devices.
- 1.4 What is the purpose of an output device? Explain various types of output devices.
- 1.5 What is assembly language? What are its main advantages?
- 1.6 What is high-level language? What are the different types of high-level languages?
- 1.7 What do we understand by a compiler and an assembler?
- 1.8 What is a flow chart? How is it different from an algorithm?
- 1.9 What are the functions of a flow chart?
- 1.10 Point down the differences between an algorithm and a flowchart.
- 1.11 Write an algorithm for withdrawing Rs. 1000 from the bank.
- 1.12 Draw a flowchart for the above.
- 1.13 Describe in detail the steps involved in testing.
- 1.14 Discuss sequence, selection and iteration in detail.
- 1.15 State whether the following statements are *true* or *false*.
 - (a) Describing the process step by step is called as flowchart.
 - (b) Algorithm involves very complex process.
 - (c) When we break up a big task into smaller steps, what we actually do is to create an algorithm.
 - (d) Each step in an algorithm can be called as an instruction.
 - (e) Parallel computing slows down the things.
 - (f) In general, the steps in an algorithm can be divided in five basic categories.
 - (g) Making a choice from multiple available options is called as a sequence.
 - (h) Performing repetitive tasks is called as iteration.
 - (i) The positioning of *End-if* can change the meaning in a process.
 - (j) Avoiding a *goto* in a program, makes it a *goto-less* or *top-down* or *structured*.
 - (k) *goto-less* programs are difficult to understand.
 - (l) We can combine two or more conditions into a single compound condition.
 - (m) If there is an *if* within another *if* then it is called as a compound condition.
 - (n) Checking to see if our algorithm gives the desired result is called as a test case.
 - (o) A group of test cases makes up the test data.
 - (p) Sequence, selection and iteration form the building blocks for writing any algorithm.
- 1.16 State whether the following statements are *true* or *false*.
 - (a) Every line in a C program should end with a semicolon.
 - (b) In C language lowercase letters are significant.
 - (c) Every C program ends with an END word.
 - (d) **main()** is where the program begins its execution.
 - (e) A line in a program may have more than one statement.

1.132 Computer Programming

- (f) A **printf** statement can generate only one line of output.
- (g) The closing brace of the **main()** in a program is the logical end of the program.
- (h) The purpose of the header file such as **stdio.h** is to store the source code of a program.
- (i) Comments cause the computer to print the text enclosed between **/*** and ***/** when executed.
- (j) Syntax errors will be detected by the compiler.
- 1.17 Which of the following statements are *true*?
- Every C program must have at least one user-defined function.
 - Only one function may be named **main()**.
 - Declaration section contains instructions to the computer.
- 1.18 Which of the following statements about comments are *false*?
- Use of comments reduces the speed of execution of a program.
 - Comments serve as internal documentation for programmers.
 - A comment can be inserted in the middle of a statement.
 - In C, we can have comments inside comments.
- 1.19 Fill in the blanks with appropriate words in each of the following statements.
- Every program statement in a C program must end with a _____
 - The _____ Function is used to display the output on the screen.
 - The _____ header file contains mathematical functions.
 - The escape sequence character _____ causes the cursor to move to the next line on the screen.
- 1.20 Remove the semicolon at the end of the **printf** statement in the program of Fig. 1.2 and execute it. What is the output?
- 1.21 In the Sample Program 2, delete line-5 and execute the program. How helpful is the error message?
- 1.22 Modify the Sample Program 3 to display the following output:
- | Year | Amount |
|------|----------|
| 1 | 5500.00 |
| 2 | 6160.00 |
| - | _____ |
| - | _____ |
| 10 | 14197.11 |
- 1.23 Find errors, if any, in the following program:
- ```

/* A simple program
int main()
{
 /* Does nothing */
}

```
- 1.24 Find errors, if any, in the following program:
- ```

#include (stdio.h)
void main(void)
{
    print("Hello C");
}

```
- 1.25 Find errors, if any, in the following program:
- ```

Include <math.h>
main { }
(
 FLOAT X;
 X = 2.5;
 Y = exp(x);
 Print(x,y);
)

```
- 1.26 Why and when do we use the **#define** directive?
- 1.27 Why and when do we use the **#include** directive?
- 1.28 What does **void main(void)** mean?
- 1.29 Distinguish between the following pairs:
- main( )** and **void main(void)**
  - int main( )** and **void main( )**
- 1.30 Why do we need to use comments in programs?
- 1.31 Why is the look of a program important?
- 1.32 Where are blank spaces permitted in a C program?
- 1.33 Describe the structure of a C program.
- 1.34 Describe the process of creating and executing a C program under UNIX system.
- 1.35 How do we implement multiple source program files?
- 1.36 State whether the following statements are *true* or *false*.



- (a) Any valid printable ASCII character can be used in an identifier.
- (b) All variables must be given a type when they are declared.
- (c) Declarations can appear anywhere in a program.
- (d) ANSI C treats the variables **name** and **Name** to be same.
- (e) The underscore can be used anywhere in an identifier.
- (f) The keyword **void** is a data type in C.
- (g) Floating point constants, by default, denote **float** type values.
- (h) Like variables, constants have a type.
- (i) Character constants are coded using double quotes.
- (j) Initialization is the process of assigning a value to a variable at the time of declaration.
- (k) All **static** variables are automatically initialized to zero.
- (l) The **scanf** function can be used to read only one value at a time.
- 1.37 Fill in the blanks with appropriate words.
- (a) The keyword \_\_\_\_\_ can be used to create a data type identifier.
- (b) \_\_\_\_\_ is the largest value that an unsigned short int type variable can store.
- (c) A global variable is also known as \_\_\_\_\_ variable.
- (d) A variable can be made constant by declaring it with the qualifier \_\_\_\_\_ at the time of initialization.
- 1.38 What are trigraph characters? How are they useful?
- 1.39 Describe the four basic data types. How could we extend the range of values they represent?
- 1.40 What is an unsigned integer constant? What is the significance of declaring a constant unsigned?
- 1.41 Describe the characteristics and purpose of escape sequence characters.
- 1.42 What is a variable and what is meant by the “value” of a variable?
- 1.43 How do variables and symbolic names differ?
- 1.44 State the differences between the declaration of a variable and the definition of a symbolic name.
- 1.45 What is initialization? Why is it important?
- 1.46 What are the qualifiers that an **int** can have at a time?
- 1.47 A programmer would like to use the word DPR to declare all the double-precision floating point values in his program. How could he achieve this?
- 1.48 What are enumeration variables? How are they declared? What is the advantage of using them in a program?
- 1.49 Describe the purpose of the qualifiers **const** and **volatile**.
- 1.50 When dealing with very small or very large numbers, what steps would you take to improve the accuracy of the calculations?
- 1.51 Which of the following are invalid constants and why?
- ```
0.0001    5 ' 1.5    99999
+100      75.45 E-2  "15.75"
-45.6     -1.79 e + 4  0.00001234
```
- 1.52 Which of the following are invalid variable names and why?
- | Minimum | First.name | n1+n2 | &name |
|---------|------------|-----------|--------------|
| doubles | 3rd_row | n\$ | Row1 |
| float | Sum Total | Row Total | Column-total |
- 1.53 Find errors, if any, in the following declaration statements.
- ```
Int x;
float letter,DIGIT;
double = p,q
exponent alpha,beta;
m,n,z: INTEGER
short char c;
long int m; count;
long float temp;
```
- 1.54 What would be the value of x after execution of the following statements?
- ```
int x, y = 10;
char z = 'a';
x = y + z;
```
- 1.55 Identify syntax errors in the following program. After corrections, what output would you expect when you execute it?

1.134 Computer Programming

```
#define PI 3.14159
main()
{
    int R,C;          /* R-Radius of circle
    float perimeter; /* Circumference of circle
    */
    float area;       /* Area of circle */
    C = PI
    R = 5;
    Perimeter = 2.0 * C *R;
    Area = C*R*R;
    printf("%f", "%d",&perimeter,&area)
}
```

1.56 State whether the following statements are *true* or *false*.

- The purpose of the header file <studio.h> is to store the programs created by the users.
- The C standard function that receives a single character from the keyboard is **getchar**.
- The **getchar** cannot be used to read a line of text from the keyboard.
- The input list in a **scanf** statement can contain one or more variables.
- When an input stream contains more data items than the number of specifications in a **scanf** statement, the unused items will be used by the next **scanf** call in the program.
- Format specifiers for output convert internal representations for data to readable characters.
- Variables form a legal element of the format control string of a **printf** statement.
- The **scanf** function cannot be used to read a single character from the keyboard.
- The format specification %+ -8d prints an integer left-justified in a field width of 8 with a plus sign, if the number is positive.
- If the field width of a format specifier is larger than the actual width of the value, the value is printed right-justified in the field.
- The print list in a **printf** statement can contain function calls.
- The format specification %5s will print only the first 5 characters of a given string to be printed.

1.57 Fill in the blanks in the following statements.

- The _____ specification is used to read or write a short integer.
- The conversion specifier _____ is used to print integers in hexadecimal form.
- For using character functions, we must include the header file _____ in the program.
- For reading a double type value, we must use the specification _____.
- The specification _____ is used to read a data from input list and discard it without assigning it to many variables.
- The specification _____ may be used in **scanf** to terminate reading at the encounter of a particular character.
- The specification %[] is used for reading strings that contain _____.
- By default, the real numbers are printed with a precision of _____ decimal places.
- To print the data left-justified, we must use _____ in the field specification.
- The specifier _____ prints floating-point values in the scientific notation.

1.58 Distinguish between the following pairs:

- getchar** and **scanf** functions.
- %s and %c specifications for reading.
- %s and %[] specifications for reading.
- %g and %f specification for printing.
- %f and %e specifications for printing.

1.59 Write **scanf** statements to read the following data lists:

- | | |
|----------------|------------------|
| (a) 78 B 45 | (b) 123 1.23 45A |
| (c) 15-10-2002 | (d) 10 TRUE 20 |

1.60 State the outputs produced by the following **printf** statements.

- printf ("%d%c%f", 10, 'x', 1.23);
- printf ("%2d %c %4.2f", 1234, 'x', 1.23);
- printf ("%d\t%4.2f", 1234, 456);
- printf ("%08.2f", 123.4);
- printf ("%d%d %d", 10, 20);

For questions 5.6 to 5.10 assume that the following declarations have been made in the

program:

```
int year, count;
float amount, price;
char code, city[10];
double root;
```

- 1.61 State errors, if any, in the following input statements.

- (a) `scanf("%c%f%d", city, &price, &year);`
- (b) `scanf("%s%d", city, amount);`
- (c) `scanf("%f, %d, &amount, &year);`
- (d) `scanf("n"%f", root);`
- (e) `scanf("%c %d %ld", *code, &count, Root);`

- 1.62 What will be the values stored in the variables **year** and **code** when the data

1988, x

is keyed in as a response to the following statements:

- (a) `scanf("%d %c", &year, &code);`
- (b) `scanf("%c %d", &year, &code);`
- (c) `scanf("%d %c", &code, &year);`
- (d) `scanf("%s %c", &year, &code);`

- 1.63 The variables **count**, **price**, and **city** have the following values:

count <— 1275

price <— -235.74

city <— Cambridge

Show the exact output that the following output statements will produce:

- (a) `printf("%d %f", count, price);`
- (b) `printf("%2d\n%f", count, price);`
- (c) `printf("%d %f", price, count);`
- (d) `printf("%10dxxx%5.2f", count, price);`
- (e) `printf("%s", city);`
- (f) `printf("%-10d %-15s", count, city);`

- 1.64 State what (if anything) is wrong with each of the following output statements:

- (a) `printf("%d 7.2%f, year, amount);`
- (b) `printf("%-s, %c"\n, city, code);`
- (c) `printf("%f, %d, %s, price, count, city);`
- (d) `printf("%c%d%f\n", amount, code, year);`

- 1.65 In response to the input statement `scanf("%4d%*%d", &year, &code, &count);` the following data is keyed in:

19883745

What values does the computer assign to the variables **year**, **code**, and **count**?

- 1.66 How can we use the **getchar()** function to

read multicharacter strings?

- 1.67 How can we use the **putchar()** function to output multicharacter strings?
- 1.68 What is the purpose of **scanf()** function?
- 1.69 Describe the purpose of commonly used conversion characters in a **scanf()** function.
- 1.70 What happens when an input data item contains
 - (a) more characters than the specified field width and
 - (b) fewer characters than the specified field width?
- 1.71 What is the purpose of **print()** function?
- 1.72 Describe the purpose of commonly used conversion characters in a **printf()** function.
- 1.73 How does a control string in a **printf()** function differ from the control string in a **scanf()** function?
- 1.74 What happens if an output data item contains
 - (a) more characters than the specified field width and
 - (b) fewer characters than the specified field width?
- 1.75 How are the unrecognized characters within the control string are interpreted in
 - (a) **scanf** function; and
 - (b) **printf** function?
- 1.76 State whether the following statements are *true* or *false*.
 - (a) All arithmetic operators have the same level of precedence.
 - (b) The modulus operator % can be used only with integers.
 - (c) The operators <=, >= and != all enjoy the same level of priority.
 - (d) During modulo division, the sign of the result is positive, if both the operands are of the same sign.
 - (e) In C, if a data item is zero, it is considered false.
 - (f) The expression $!(x <= y)$ is same as the expression $x > y$.
 - (g) A unary expression consists of only one operand with no operators.
 - (h) Associativity is used to decide which of several different expressions is evaluated first.

- (i) An expression statement is terminated with a period.
- (j) During the evaluation of mixed expressions, an implicit cast is generated automatically.
- (k) An explicit cast can be used to change the expression.
- (l) Parentheses can be used to change the order of evaluation expressions.
- 1.77 Fill in the blanks with appropriate words.
- (a) The expression containing all the integer operands is called _____ expression.
- (b) The operator _____ cannot be used with real operands.
- (c) C supports as many as _____ relational operators.
- (d) An expression that combines two or more relational expressions is termed as _____ expression.
- (e) The _____ operator returns the number of bytes the operand occupies.
- (f) The order of evaluation can be changed by using _____ in an expression.
- (g) The use _____ of on a variable can change its type in the memory.
- (h) _____ is used to determine the order in which different operators in an expression are evaluated.
- 1.78 Given the statement
`int a = 10, b = 20, c;`
 determine whether each of the following statements are true or false.
- (a) The statement `a = + 10`, is valid.
- (b) The expression `a + 4/6 * 6/2` evaluates to 11.
- (c) The expression `b + 3/2 * 2/3` evaluates to 20.
- (d) The statement `a += b`; gives the values 30 to a and 20 to b.
- (e) The statement `++a++`; gives the value 12 to a
- (f) The statement `a = 1/b`; assigns the value 0.5 to a
- 1.79 Declared **a** as *int* and **b** as *float*, state whether the following statements are true or false.
- (a) The statement `a = 1/3 + 1/3 + 1/3`; assigns the value 1 to a.
- (b) The statement `b = 1.0/3.0 + 1.0/3.0 + 1.0/3.0`; assigns a value 1.0 to b.
- (c) The statement `b = 1.0/3.0 * 3.0` gives a value 1.0 to b.
- (d) The statement `b = 1.0/3.0 + 2.0/3.0` assigns a value 1.0 to b.
- (e) The statement `a = 15/10.0 + 3/2`; assigns a value 3 to a.
- 1.80 Which of the following expressions are true?
- (a) `!(5 + 5 >= 10)`
- (b) `5 + 5 == 10 || 1 + 3 == 5`
- (c) `5 > 10 || 10 < 20 && 3 < 5`
- (d) `10 != 15 && !(10 < 20) || 15 > 30`
- 1.81 Which of the following arithmetic expressions are valid ? If valid, give the value of the expression; otherwise give reason.
- (a) $25/3 \% 2$ (e) $-14 \% 3$
- (b) $+9/4 + 5$ (f) $15.25 + -5.0$
- (c) $7.5 \% 3$ (g) $(5/3) * 3 + 5 \% 3$
- (d) $14 \% 3 + 7 \% 2$ (h) $21 \% (\text{int})4.5$
- 1.82 Write C assignment statements to evaluate the following equations:
- (a) $\text{Area} = \pi r^2 + 2\pi r h$
- (b) $\text{Torque} = \frac{2m_1 m_2}{m_1 + m_2} g$
- (c) $\text{side} = \sqrt{a^2 + b^2 - 2ab \cos(x)}$
- (d) $\text{Energy} = \text{mass} \left[\text{acceleration} \times \text{height} + \frac{(\text{velocity})^2}{2} \right]$
- 1.83 Identify unnecessary parentheses in the following arithmetic expressions.
- (a) `((x-(y/5)+z)%8) + 25`
- (b) `((x-y) * p)+q`
- (c) `(m*n) + (-x/y)`
- (d) `x/(3*y)`
- 1.84 Find errors, if any, in the following assignment statements and rectify them.
- (a) `x = y = z = 0.5, 2.0, -5.75;`
- (b) `m = ++a * 5;`
- (c) `y = sqrt(100);`

- (d) $p = x/y;$
 (e) $s = /5;$
 (f) $a = b++ - c * 2$

1.85 Determine the value of each of the following logical expressions if $a = 5$, $b = 10$ and $c = -6$

- (a) $a > b \ \&\& \ a < c$
 (b) $a < b \ \&\& \ a > c$
 (c) $a == c \ || \ b > a$
 (d) $b > 15 \ \&\& \ c < 0 \ || \ a > 0$
 (e) $(a/2.0 == 0.0 \ \&\& \ b/2.0 != 0.0) \ || \ c < 0.0$

1.86 What is the output of the following program?

```
main ( )
{
    char x;
    int y;
    x = 100;
    y = 125;
    printf ("%c\n", x) ;
    printf ("%c\n", y) ;
    printf ("%d\n", x) ;
}
```

1.87 Find the output of the following program?

```
main ( )
{
    int x = 100;
    printf("%d\n", 10 + x++);
    printf("%d\n", 10 + ++x);
}
```

1.88 What is printed by the following program?

```
main
{
    int x = 5, y = 10, z = 10 ;
    x = y == z;
    printf("%d",x ) ;
}
```

1.89 What is the output of the following program?

```
main ( )
{
    int x = 100, y = 200;
```

```
    printf ("%d", (x > y)? x : y);
}
```

1.90 What is the output of the following program?

```
main ( )
{
    unsigned x = 1 ;
    signed char y = -1 ;
    if(x > y)
        printf(" x > y");
    else
        printf("x<= y") ;
}
```

Did you expect this output? Explain.

1.91 What is the output of the following program?

Explain the output.

```
main ( )
{
    int x = 10 ;
    if(x = 20) printf("TRUE") ;
    else printf("FALSE") ;
}
```

1.92 What is the error in each of the following statements?

- (a) $\text{if} (m == 1 \ \& \ n != 0)$
 $\text{printf}(\text{"OK"});$
 (b) $\text{if} (x < 5)$
 $\text{printf}(\text{"Jump"});$

1.93 What is the error, if any, in the following segment?

```
int x = 10 ;
float y = 4.25 ;
x = y*x ;
```

1.94 What is printed when the following is executed?

```
for (m = 0; m < 3; ++m)
    printf("%d\n", (m%2) ? m: m+2);
```

1.95 What is the output of the following segment when executed?

```
int m = -14, n = 3;
printf("%d\n", m/n * 10) ;
n = -n;
printf("%d\n", m/n * 10);
```

Programming Exercises

1.1 Write a program that will print your mailing address in the following form:

First line : Name
 Second line : Door No, Street
 Third line : City, Pin code

1.2 Modify the above program to provide border lines to the address.

1.3 Write a program using one print statement to print the pattern of asterisks as shown below:

1.138 Computer Programming

```

*
*  *
*  *  *
*  *  *  *

```

- 1.4 Write a program that will print the following figure using suitable characters.



- 1.5 Given the radius of a circle, write a program to compute and display its area. Use a symbolic constant to define the π value and assume a suitable value for radius.
- 1.6 Write a program to output the following multiplication table:
- ```

5 × 1 = 5
5 × 2 = 10
5 × 3 = 15
. .
. .
5 × 10 = 50

```
- 1.7 Given two integers 20 and 10, write a program that uses a function `add()` to add these two numbers and `sub()` to find the difference of these two numbers and then display the sum and difference in the following form:
- ```

20 + 10 = 30
20 - 10 = 10

```
- 1.8 Given the values of three variables a , b and c , write a program to compute and display the value of x , where

$$x = \frac{a}{b - c}$$

Execute your program for the following values:

- (a) $a = 250$, $b = 85$, $c = 25$
 (b) $a = 300$, $b = 70$, $c = 70$

Comment on the output in each case.

- 1.9 Relationship between Celsius and Fahrenheit is governed by the formula

$$F = \frac{9C}{5} + 32$$

Write a program to convert the temperature

- (a) from Celsius to Fahrenheit and
 (b) from Fahrenheit to Celsius.

- 1.10 Area of a triangle is given by the formula

$$A = \sqrt{S(S-a)(S-b)(S-c)}$$

Where a , b and c are sides of the triangle and $2S = a + b + c$. Write a program to compute the area of the triangle given the values of a , b and c .

- 1.11 Distance between two points (x_1, y_1) and (x_2, y_2) is governed by the formula

$$D^2 = (x_2 - x_1)^2 + (y_2 - y_1)^2$$

Write a program to compute D given the coordinates of the points.

- 1.12 A point on the circumference of a circle whose center is $(0, 0)$ is $(4, 5)$. Write a program to compute perimeter and area of the circle. (Hint: use the formula given in the Ex. 1.11)
- 1.13 The line joining the points $(2, 2)$ and $(5, 6)$ which lie on the circumference of a circle is the diameter of the circle. Write a program to compute the area of the circle.
- 1.14 Write a program to display the equation of a line in the form
- $$ax + by = c$$
- for $a = 5$, $b = 8$ and $c = 18$.
- 1.15 Write a program to display the following simple arithmetic calculator
- | | | | |
|-----------|----------------------|--------------|----------------------|
| $x =$ | <input type="text"/> | $y =$ | <input type="text"/> |
| sum = | <input type="text"/> | Difference = | <input type="text"/> |
| Product = | <input type="text"/> | Division = | <input type="text"/> |
- 1.16 Write a program to determine and print the sum of the following harmonic series for a given value of n :
- $$1 + \frac{1}{2} + \frac{1}{3} + \dots + \frac{1}{n}$$
- The value of n should be given interactively through the terminal.
- 1.17 Write a program to read the price of an item in decimal form (like 15.95) and print the output in paise (like 1595 paise).
- 1.18 Write a program that prints the even numbers from 1 to 100.
- 1.19 Write a program that requests two float type numbers from the user and then divides the first number by the second and display the result along with the numbers.

- 1.20 The price of one kg of rice is Rs. 16.75 and one kg of sugar is Rs. 15. Write a program to get these values from the user and display the prices as follows:

```
*** LIST OF ITEMS ***
Item      Price
Rice      Rs 16.75
Sugar     Rs 15.00
```

- 1.21 Write program to count and print the number of negative and positive numbers in a given set of numbers. Test your program with a suitable set of numbers. Use **scanf** to read the numbers. Reading should be terminated when the value 0 is encountered.
- 1.22 Write a program to do the following:
- Declare x and y as integer variables and z as a short integer variable.
 - Assign two 6 digit numbers to x and y
 - Assign the sum of x and y to z
 - Output the values of x, y and z
Comment on the output.
- 1.23 Write a program to read two floating point numbers using a **scanf** statement, assign their sum to an integer variable and then output the values of all the three variables.
- 1.24 Write a program to illustrate the use of **typedef** declaration in a program.
- 1.25 Write a program to illustrate the use of symbolic constants in a real-life application.
- 1.26 Given the string "WORDPROCESSING", write a program to read the string from the terminal and display the same in the following formats:
- WORD PROCESSING
 - WORD
PROCESSING
 - W.P.
- 1.27 Write a program to read the values of x and y and print the results of the following expressions in one line:
- $\frac{x+y}{x-y}$
 - $\frac{x+y}{2}$
 - $(x+y)(x-y)$
- 1.28 Write a program to read the following numbers, round them off to the nearest integers and print out the results in integer form:
35.7 50.21 - 23.73 - 46.45
- 1.29 Write a program that reads 4 floating point values in the range, 0.0 to 20.0, and prints a horizontal bar chart to represent these values using the character * as the fill character. For the purpose of the chart, the values may be rounded off to the nearest integer. For example, the value 4.36 should be represented as follows.
- ```

* * * *
* * * * 4.36
* * * *
```
- Note that the actual values are shown at the end of each bar.
- 1.30 Write an interactive program to demonstrate the process of multiplication. The program should ask the user to enter two two-digit integers and print the product of integers as shown below.
- ```

                                45
                                37
                                ---
7 × 45 is                       315
3 × 45 is                       135
Add them                        1665
```
- 1.31 Write a program to read three integers from the keyboard using one **scanf** statement and output them on one line using:
- three **printf** statements,
 - only one **printf** with conversion specifiers, and
 - only one **printf** without conversion specifiers.
- 1.32 Write a program that prints the value 10.45678 in exponential format with the following specifications:
- correct to two decimal places;
 - correct to four decimal places; and
 - correct to eight decimal places.
- 1.33 Write a program to print the value 345.6789 in fixed-point format with the following specifications:
- correct to two decimal places;

1.140 Computer Programming

- (b) correct to five decimal places; and
(c) correct to zero decimal places.
- 1.34 Write a program to read the name ANIL KUMAR GUPTA in three parts using the **scanf** statement and to display the same in the following format using the **printf** statement.
- (a) ANIL K. GUPTA
(b) A.K. GUPTA
(c) GUPTA A.K.
- 1.35 Write a program to read and display the following table of data.
- | Name | Code | Price |
|-------|-------|---------|
| Fan | 67831 | 1234.50 |
| Motor | 450 | 5786.70 |
- The name and code must be left-justified and price must be right-justified.
- 1.36 Given the values of the variables x, y and z, write a program to rotate their values such that x has the value of y, y has the value of z, and z has the value of x.
- 1.37 Write a program that reads a floating-point number and then displays the right-most digit of the integral part of the number.
- 1.38 Modify the above program to display the two right-most digits of the integral part of the number.
- 1.39 Write a program that will obtain the length and width of a rectangle from the user and compute its area and perimeter.
- 1.40 Given an integer number, write a program that displays the number as follows:
- First line : all digits
Second line : all except first digit
Third line : all except first two digits
.....
Last line : The last digit
For example, the number 5678 will be displayed as:
- ```
5 6 7 8
6 7 8
7 8
8
```
- 1.41 The straight-line method of computing the yearly depreciation of the value of an item is given by
- $$\text{Depreciation} = \frac{\text{Purchase Price} - \text{Salvage Value}}{\text{Years of Service}}$$

Write a program to determine the salvage value of an item when the purchase price, years of service, and the annual depreciation are given.

- 1.42 Write a program that will read a real number from the keyboard and print the following output in one line:

|                                                 |                     |                                                   |
|-------------------------------------------------|---------------------|---------------------------------------------------|
| Smallest integer<br>not less than<br>the number | The given<br>number | Largest integer<br>not greater than<br>the number |
|-------------------------------------------------|---------------------|---------------------------------------------------|

- 1.43 The total distance travelled by a vehicle in  $t$  seconds is given by

$$\text{distance} = ut + (at^2)/2$$

where  $u$  is the initial velocity (metres per second),  $a$  is the acceleration (metres per second<sup>2</sup>). Write a program to evaluate the distance travelled at regular intervals of time, given the values of  $u$  and  $a$ . The program should provide the flexibility to the user to select his own time intervals and repeat the calculations for different values of  $u$  and  $a$ .

- 1.44 In inventory management, the Economic Order Quantity for a single item is given by

$$\text{EOQ} = \sqrt{\frac{2 \times \text{demand rate} \times \text{setup costs}}{\text{holding cost per item per unit time}}}$$

and the optimal Time Between Orders

$$\text{TBO} = \sqrt{\frac{2 \times \text{setup costs}}{\text{demand rate} \times \text{holding cost per item per unit time}}}$$

Write a program to compute EOQ and TBO, given demand rate (items per unit time), setup costs (per order), and the holding cost (per item per unit time).

- 1.45 For a certain electrical circuit with an inductance  $L$  and resistance  $R$ , the damped natural frequency is given by

$$\text{Frequency} = \sqrt{\frac{1}{LC} - \frac{R^2}{4C^2}}$$

It is desired to study the variation of this frequency with  $C$  (capacitance). Write a program to calculate the frequency for different values of  $C$  starting from 0.01 to 0.1 in steps of 0.01.



- 1.46 Write a program to read a four digit integer and print the sum of its digits.  
Hint: Use / and % operators.
- 1.47 Write a program to print the size of various data types in C.
- 1.48 Given three values, write a program to read three values from keyboard and print out the largest of them without using **if** statement.
- 1.49 Write a program to read two integer values m and n and to decide and print whether m is a multiple of n.
- 1.50 Write a program to read three values using **scanf** statement and print the following results:
- Sum of the values
  - Average of the three values
  - Largest of the three
  - Smallest of the three
- 1.51 The cost of one type of mobile service is Rs. 250 plus Rs. 1.25 for each call made over and above 100 calls. Write a program to read customer codes and calls made and print the bill for each customer.

- 1.52 Write a program to print a table of **sin** and **cos** functions for the interval from 0 to 180 degrees in increments of 15 as shown below.

| <i>x (degrees)</i> | <i>sin (x)</i> | <i>cos (x)</i> |
|--------------------|----------------|----------------|
| 0                  | .....          | .....          |
| 15                 | .....          | .....          |
| ...                |                |                |
| ...                |                |                |
| 180                | .....          | .....          |

- 1.53 Write a program to compute the values of square-roots and squares of the numbers 0 to 100 in steps 10 and print the output in a tabular form as shown below.

| <i>Number</i> | <i>Square-root</i> | <i>Square</i> |
|---------------|--------------------|---------------|
| 0             | 0                  | 0             |
| 100           | 10                 | 10000         |

- 1.54 Write a program that determines whether a given integer is odd or even and displays the number and description on the same line.
- 1.55 Write a program to illustrate the use of cast operator in a real life situation.

## Key Terms

- **Computer:** It is an electronic device that takes data and instructions as input from the user, processes the data, and generates useful information as an output.
- **Vacuum tube:** It was used in the first generation computers for developing the circuitry. It comprised of glass and filaments.
- **Transistor:** It is a solid state device used in the second generation computers. It replaced vacuum tubes.
- **IC:** It is a silicon chip that embeds an electronic circuit comprising of several components, such as transistors, diodes, and resistors. It is used in third generation computers.
- **Microprocessor:** It is a processor chip used in fourth generation computers. It integrates thousands of components on a single chip.
- **LAN:** It is a network, where multiple computers in a local area, such as home, office, or small group of buildings, are connected and allowed to communicate among them.
- **WAN:** It is a network, which facilitates connection and communication of hundreds of computers located across multiple locations.
- **MAN:** It is a network that is used to connect the computers over a large geographical area, such as district or city.
- **GUI:** It is a user-friendly interface that provides icons and menus to interact with the various computer applications.
- **Microcomputer:** It is defined as a computer that has a microprocessor as its CPU.
- **Minicomputer:** It is a medium-sized computer that is designed to serve multiple users simultaneously.
- **Mainframe computer:** It is a computer, which helps in handling the information processing of various organizations like banks, insurance companies, hospitals and railways.

- **Supercomputer:** It is the most powerful and fastest computer. It is used for complex scientific applications.
- **Input devices:** Input devices accept the data from the end users on which the operations are to be performed.
- **Output devices:** Output devices are used for providing the output of a program that is obtained after performing the operations specified in a program.
- **CPU:** It is the heart of a computer that is used to process the data entered through the input device.
- **Memory:** It is used for storing the input data as well as the output of a program that is obtained after performing the operations in a program.
- **Scanner:** It is an input device that converts documents and images as the digitized images understandable by the computer system.
- **Motherboard:** It is a device used for connecting the CPU with the input and output devices.
- **RAM:** It is the primary memory of a computer that stores information and programs, until the computer is used.
- **Monitor:** It is an output device that produces visual displays generated by the computer.
- **Printer:** It is an output device that prints the computer generated information onto the paper sheets.
- **Speaker:** It is an electromechanical transducer that converts an electrical signal into sound.
- **Plotter:** It is an output device that is connected to a computer to print large documents, such as engineering and constructional drawings.
- **System software:** It refers to a computer program that manages and controls hardware components.
- **Application software:** It is a computer program that is designed and developed for performing specific utility tasks; it is also known as end-user program.
- **Operating System:** It is the system software that helps in managing the resources of a computer system. It also provides a platform for the application programs to run on the computer system.
- **Binary number system:** It is a numeral system that represents numeric values using only two digits, 0 and 1, known as bits.
- **ASCII:** It is a standard alphanumeric code that represents numbers, alphabetic characters, and symbols using a 7-bit format.
- **Logic gates:** These are the basic building blocks of a digital computer having two input signals and one output signal.
- **Assembler:** It is a computer program that translates assembly language statements into machine language codes.
- **Compiler:** It is a computer program that translates the source code written in a high-level language into the corresponding object code of the low-level language.
- **Interpreter:** It is a translation program that converts each high-level program statement into the corresponding machine code.
- **Algorithm:** It is a complete, detailed, and precise step-by-step method for solving a problem independently.
- **Flowchart:** It is a pictorial representation of an algorithm depicting the flow of various steps.
- **Function:** It is a subroutine that may include one or more statements designed to perform a specific task.
- **Global variable:** It is a variable that can be used in more than one function.
- **Function body:** It is the part of a program that contains all the statements between the two braces, i.e. { and }.
- **Newline character:** It instructs the computer to go to the next (new) line.
- **Arguments:** Arguments are the values that are passed to a function as input.
- **Program:** A program contains a sequence of instructions written to perform a specific task.
- **Identifiers:** These are the names of variables, functions and arrays.
- **Constant:** It is a fixed value that does not change during the execution of a program.

- **String constant:** It is a sequence of characters enclosed in double quotes that represents a text string.
- **Variable:** It is a data name that may be used to store a data value.
- **Information:** The processed data generated by a program is called information.
- **Formatted input:** It refers to the input data that has been arranged in a particular format.
- **Control string:** It contains field specifications, which direct the interpretation of input data. It is also known as format string.
- **Formatted output:** It refers to the generated output that has been arranged in a particular format.
- **printf:** It is a function used to print and display output of a program.
- **scanf:** It is a function used to read values entered by the user upon execution of a program.
- **Operator:** It is a symbol that tells the computer to perform certain mathematical or logical computations.
- **Expression:** It is a sequence of operands and operators that reduces to a single value.
- **Integer expression:** When both the operands in a single arithmetic expression are integers, then that expression is termed as integer expression.
- **Real arithmetic:** An arithmetic operation involving only real operands is known as real arithmetic.
- **Mixed-mode arithmetic:** When one of the operands is real and the other is an integer, then the expression is known as a mixed-mode arithmetic expression.
- **Relational operators:** These operators are used for making comparisons between two expressions.
- **Logical operators:** These operators are used for testing more than one condition and making decisions.
- **Assignment operators:** These operators are used for assigning the result of an expression to a variable.
- **Bitwise operators:** These operators are used for testing the bits, or shifting them right or left.
- **Comma operator:** It is used to link the related expressions together.
- **Sizeof operator:** It is a compile time operator and when used with an operand, it returns the number of bytes the operand occupies.
- **Arithmetic expressions:** It is a combination of variables, constants and operators arranged as per the syntax of the language.



# UNIT 2

## Selection and Decision Making

### 2.1 INTRODUCTION

We have seen that a C program is a set of statements which are normally executed sequentially in the order in which they appear. This happens when no options or no repetitions of certain calculations are necessary. However, in practice, we have a number of situations where we may have to change the order of execution of statements based on certain conditions, or repeat a group of statements until certain specified conditions are met. This involves a kind of decision making to see whether a particular condition has occurred or not and then direct the computer to execute certain statements accordingly.

C language possesses such decision-making capabilities by supporting the following statements:

1. **if** statement
2. **switch** statement
3. Conditional operator statement
4. **goto** statement

These statements are popularly known as *decision-making statements*. Since these statements ‘control’ the flow of execution, they are also known as *control statements*.

We have already used some of these statements in the earlier examples. Here, we shall discuss their features, capabilities and applications in more detail.

### 2.2 DECISION MAKING WITH IF STATEMENT

The **if** statement is a powerful decision-making statement and is used to control the flow of execution of statements. It is basically a two-way decision statement and is used in conjunction with an expression. It takes the following form:

```
if (test expression)
```

It allows the computer to evaluate the expression first and then, depending on whether the value of the expression (relation or condition) is ‘true’ (or non-zero) or ‘false’ (zero), it transfers the control to a particular statement. This point of program has two *paths* to follow, one for the *true* condition and the other for the *false* condition as shown in Fig. 2.1.

Some examples of decision making, using **if** statements are:

1. **if** (bank balance is zero)  
    borrow money

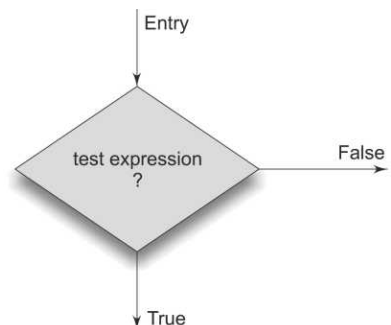


Fig. 2.1 Two-way branching

## 2.2 Computer Programming

2. **if** (room is dark)  
put on lights
3. **if** (code is 1)  
person is male
4. **if** (age is more than 55)  
person is retired

The **if** statement may be implemented in different forms depending on the complexity of conditions to be tested. The different forms are:

1. Simple **if** statement
2. **if....else** statement
3. Nested **if....else** statement
4. **else if** ladder.

We shall discuss each one of them in the next few sections.

## 2.3 SIMPLE IF STATEMENT

The general form of a simple **if** statement is


```
if (test expression)
{
 statement-block;
}
statement-x;
```

The ‘statement-block’ may be a single statement or a group of statements. If the *test expression* is true, the *statement-block* will be executed; otherwise the statement-block will be skipped and the execution will jump to the *statement-x*. Remember, when the condition is true both the statement-block and the statement-x are executed in sequence. This is illustrated in Fig. 2.2.

Consider the following segment of a program that is written for processing of marks obtained in an entrance examination.

```
.....
.....
if (category == SPORTS)
{
 marks = marks + bonus_marks;
}
printf("%f", marks);
.....
.....
```

The program tests the type of category of the student. If the student belongs to the SPORTS category, then additional bonus\_marks are added to his marks before they are printed. For others, bonus\_marks are not added.

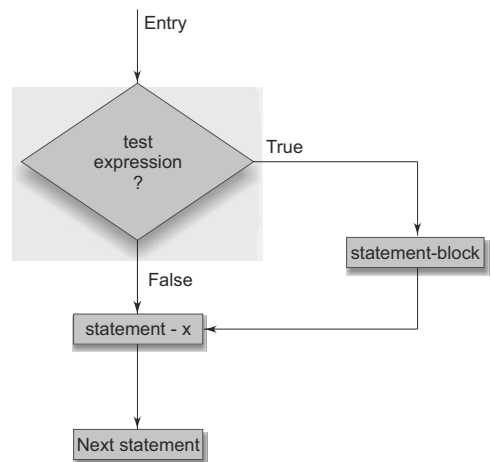

**Fig. 2.2** Flow chart of simple **if** control

**EXAMPLE 2.1** The program in Fig. 2.3 reads four values a, b, c, and d from the terminal and evaluates the ratio of (a+b) to (c-d) and prints the result, if c-d is not equal to zero.

The program given in Fig. 2.3 has been run for two sets of data to see that the paths function properly. The result of the first run is printed as,

Ratio = -3.181818

|                |                                                                                                                                                                                                                                                                                                                   |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Program</b> | <pre> main() {     int a, b, c, d;     float ratio;      printf("Enter four integer values\n");     scanf("%d %d %d %d", &amp;a, &amp;b, &amp;c, &amp;d);      if (c-d != 0) /* Execute statement block */     {         ratio = (float)(a+b)/(float)(c-d);         printf("Ratio = %f\n", ratio);     } } </pre> |
| <b>Output</b>  | <pre> Enter four integer values 12 23 34 45 Ratio = -3.181818  Enter four integer values 12 23 34 34 </pre>                                                                                                                                                                                                       |

**Fig. 2.3** Illustration of simple **if** statement

The second run has neither produced any results nor any message. During the second run, the value of (c-d) is equal to zero and therefore, the statements contained in the statement-block are skipped. Since no other statement follows the statement-block, program stops without producing any output.

Note the use of **float** conversion in the statement evaluating the **ratio**. This is necessary to avoid truncation due to integer division. Remember, the output of the first run -3.181818 is printed correct to six decimal places. The answer contains a round off error. If we wish to have higher accuracy, we must use **double** or **long double** data type.

The simple **if** is often used for counting purposes. The Example 2.2 illustrates this.

|                    |                                                                                                                      |
|--------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>EXAMPLE 2.2</b> | The program in Fig. 2.4 counts the number of boys whose weight is less than 50 kg and height is greater than 170 cm. |
|--------------------|----------------------------------------------------------------------------------------------------------------------|

The program has to test two conditions, one for weight and another for height. This is done using the compound relation

**if (weight < 50 && height > 170)**

This would have been equivalently done using two **if** statements as follows:

```

if (weight < 50)
if (height > 170)
count = count +1;

```

## 2.4 Computer Programming

If the value of **weight** is less than 50, then the following statement is executed, which in turn is another **if** statement. This **if** statement tests **height** and if the **height** is greater than 170, then the **count** is incremented by 1.

### Program

```
main()
{
 int count, i;
 float weight, height;
 count = 0;
 printf("Enter weight and height for 10 boys\n");
 for (i =1; i <= 10; i++)
 {
 scanf("%f %f", &weight, &height);
 if (weight < 50 && height > 170)
 count = count + 1;
 }
 printf("Number of boys with weight < 50 kg\n");
 printf("and height > 170 cm = %d\n", count);
}
```

### Output

```
Enter weight and height for 10 boys
45 176.5
55 174.2
47 168.0
49 170.7
54 169.0
53 170.5
49 167.0
48 175.0
47 167
51 170
Number of boys with weight < 50 kg
and height > 170 cm = 3
```

Fig. 2.4 Use of **if** for counting

### Applying De Morgan's Rule

While designing decision statements, we often come across a situation where the logical NOT operator is applied to a compound logical expression, like `!(x&&y||!z)`. However, a positive logic is always easy to read and comprehend than a negative logic. In such cases, we may apply what is known as **De Morgan's** rule to make the total expression positive. This rule is as follows:

"Remove the parentheses by applying the NOT operator to every logical expression component, while complementing the relational operators."

That is,

x becomes !x

!x becomes x

&& becomes ||

|| becomes &&

Examples:

`!(x && y || !z)` becomes `!x || !y && z`

`!(x <=0 || !condition)` becomes `x >0&& condition`



## 2.4 THE IF.....ELSE STATEMENT

The **if...else** statement is an extension of the simple **if** statement. The general form is

```

If (test expression)
{
 True-block statement(s)
}
else
{
 False-block statement(s)
}
statement-x

```

If the *test expression* is true, then the *true-block statement(s)*, immediately following the **if** statements are executed; otherwise, the *false-block statement(s)* are executed. In either case, either *true-block* or *false-block* will be executed, not both. This is illustrated in Fig. 2.5. In both the cases, the control is transferred subsequently to the *statement-x*.

Let us consider an example of counting the number of boys and girls in a class. We use code 1 for a boy and 2 for a girl. The program statement to do this may be written as follows:

```

.....
.....
if (code == 1)
 boy = boy + 1;
if (code == 2)
 girl = girl+1;
.....
.....

```

The first test determines whether or not the student is a boy. If yes, the number of boys is increased by 1 and the program continues to the second test. The second test again determines whether the student is a girl. This is unnecessary. Once a student is identified as a boy, there is no need to test again for a girl. A student can be either a boy or a girl, not both. The above program segment can be modified using the **else** clause as follows:

```

.....
.....
if (code == 1)
 boy = boy + 1;
else
 girl = girl + 1;
 xxxxxxxxx
.....

```

Here, if the code is equal to 1, the statement **boy = boy + 1**; is executed and the control is transferred to the statement **xxxxxxx**, after skipping the **else** part. If the code is not equal to 1, the statement **boy = boy + 1**; is skipped and the statement in the **else** part **girl = girl + 1**; is executed before the control reaches the statement **xxxxxxx**.

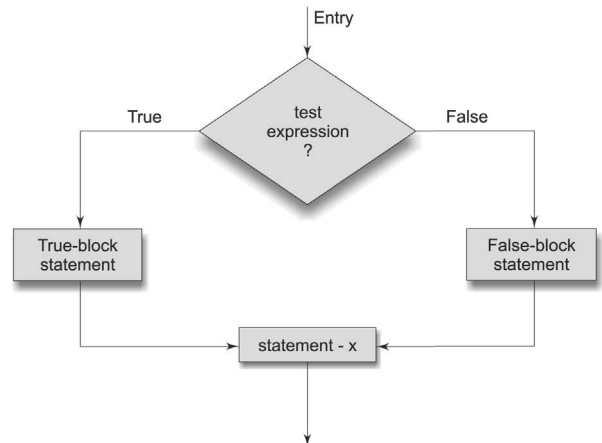


Fig. 2.5 Flow chart of **if.....else** control

## 2.6 Computer Programming

Consider the program given in Fig. 2.3. When the value (c-d) is zero, the ratio is not calculated and the program stops without any message. In such cases we may not know whether the program stopped due to a zero value or some other error. This program can be improved by adding the **else** clause as follows:

```
.....
.....
if (c-d != 0)
{
 ratio = (float)(a+b)/(float)(c-d);
 printf("Ratio = %f\n", ratio);
}
else
 printf("c-d is zero\n");
.....
.....
```

**EXAMPLE 2.3** A program to evaluate the power series:

$$e^x = 1 + x + \frac{x^2}{2!} + \frac{x^3}{3} + \dots + \frac{x^n}{n} \quad 0 < x < 1$$

The power series contains the recurrence relationship of the type

$$T_n = T_{n-1} \left( \frac{x}{n} \right) \text{ for } n > 1$$

$$T_1 = x \text{ for } n = 1$$

$$T_0 = 1$$

If  $T_{n-1}$  (usually known as *previous term*) is known, then  $T_n$  (known as *present term*) can be easily found by multiplying the previous term by  $x/n$ . Then

$$e^x = T_0 + T_1 + T_2 + \dots + T_n = \text{sum}$$

A program **which uses if...else** to test the accuracy is given in Fig. 2.6.

### Program

```
#define ACCURACY 0.0001
main()
{
 int n, count;
 float x, term, sum;
 printf("Enter value of x:");
 scanf("%f", &x);
 n = term = sum = count = 1;
 while (n <= 100)
 {
 term = term * x/n;
 sum = sum + term;
 count = count + 1;
 if (term < ACCURACY)
 n = 999;
 }
```

(Contd.)

```

 else
 n = n + 1;
 }
 printf("Terms = %d Sum = %f\n", count, sum);
}

```

**Output**

```

Enter value of x:0
Terms = 2 Sum = 1.000000
Enter value of x:0.1
Terms = 5 Sum = 1.105171
Enter value of x:0.5
Terms = 7 Sum = 1.648720
Enter value of x:0.75
Terms = 8 Sum = 2.116997
Enter value of x:0.99
Terms = 9 Sum = 2.691232
Enter value of x:1
Terms = 9 Sum = 2.718279

```

**Fig. 2.6** Illustration of **if...else** statement

The program uses **count** to count the number of terms added. The program stops when the value of the term is less than 0.0001 (**ACCURACY**). Note that when a term is less than **ACCURACY**, the value of **n** is set equal to 999 (a number higher than 100) and therefore the **while** loop terminates. The results are printed outside the **while** loop.

## 2.5 NESTING OF IF...ELSE STATEMENTS

When a series of decisions are involved, we may have to use more than one **if...else** statement in *nested* form as shown below:

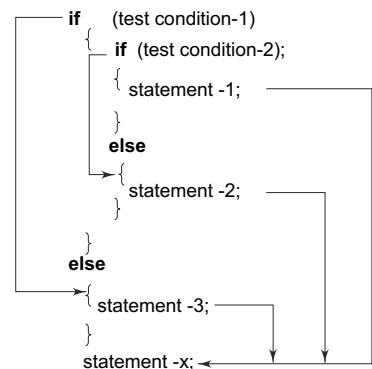
The logic of execution is illustrated in Fig. 2.7. If the *condition-1* is false, the statement-3 will be executed; otherwise it continues to perform the second test. If the *condition-2* is true, the statement-1 will be evaluated; otherwise the statement-2 will be evaluated and then the control is transferred to the statement-x.

A commercial bank has introduced an incentive policy of giving bonus to all its deposit holders. The policy is as follows: A bonus of 2 per cent of the balance held on 31st December is given to every one, irrespective of their balance, and 5 per cent is given to female account holders if their balance is more than Rs. 5000. This logic can be coded as follows:

```

.....
 if (sex is female)
 {
 if (balance > 5000)
 bonus = 0.05 * balance;
 else
 bonus = 0.02 * balance;
 }

```



## 2.8 Computer Programming

```
else
{
 bonus = 0.02 * balance;
}

balance = balance + bonus;
.....
.....
```

When nesting, care should be exercised to match every **if** with an **else**. Consider the following alternative to the above program (which looks right at the first sight):

```
if (sex is female)
 if (balance > 5000)
 bonus = 0.05 * balance;
 else
 bonus = 0.02 * balance;
 balance = balance + bonus;
```

There is an ambiguity as to over which **if** the **else** belongs to. In C, an **else** is linked to the closest non-terminated **if**. Therefore, the **else** is associated with the inner **if** and there is no **else** option for the outer **if**. This means that the computer is trying to execute the statement


**balance = balance + bonus;**

without really calculating the bonus for the male account holders.

Consider another alternative, which also looks correct:

```
if (sex is female)
{
 if (balance > 5000)
 bonus = 0.05 * balance;
 }
 else
 bonus = 0.02 * balance;
 balance = balance + bonus;
```

In this case, **else** is associated with the outer **if** and therefore bonus is calculated for the male account holders. However, bonus for the female account holders, whose balance is equal to or less than 5000 is not calculated because of the missing **else** option for the inner **if**.

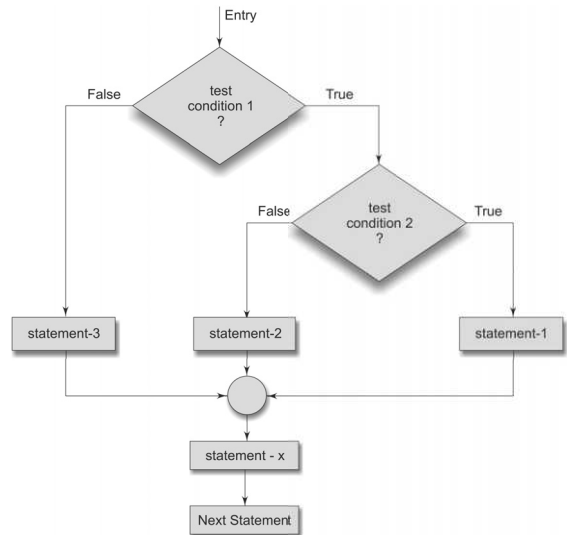

**Fig. 2.7** Flow chart of nested **if...else** statements

**EXAMPLE 2.4** The program in Fig. 2.8 selects and prints the largest of the three numbers using nested if....else statements.

### Program

```
main()
{
 float A, B, C;
 printf("Enter three values\n");
 scanf("%f %f %f", &A, &B, &C);
 printf("\nLargest value is ");
```

(Contd.)

```

if (A>B)
{
 if (A>C)
 printf("%f\n", A);
 else
 printf("%f\n", C);
}
else
{
 if (C>B)
 printf("%f\n", C);
 else
 printf("%f\n", B);
}
}

```

**Output**

```

Enter three values
23445 67379 88843
Largest value is 88843.000000

```


**Fig. 2.8** Selecting the largest of three numbers**Dangling Else Problem**

One of the classic problems encountered when we start using nested **if....else** statements is the dangling else. This occurs when a matching **else** is not available for an **if**. The answer to this problem is very simple. Always match an **else** to the most recent unmatched **if** in the current block. In some cases, it is possible that the false condition is not required. In such situations, **else** statement may be omitted

**"else is always paired with the most recent unpaired if"**

**2.6 THE ELSE IF LADDER**

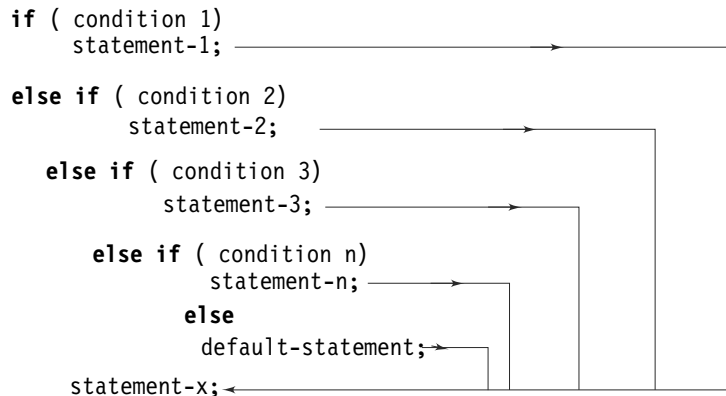There is another way of putting **ifs** together when multipath decisions are involved. A multipath decision is a chain of **ifs** in which the statement associated with each **else** is an **if**. It takes the following general form:



This construct is known as the **else if** ladder. The conditions are evaluated from the top (of the ladder), downwards. As soon as a true condition is found, the statement associated with it is executed and the control

## 2.10 Computer Programming

is transferred to the statement-x (skipping the rest of the ladder). When all the  $n$  conditions become false, then the final **else** containing the *default-statement* will be executed. Figure 2.9 shows the logic of execution of **else if** ladder statements.

Let us consider an example of grading the students in an academic institution. The grading is done according to the following rules:

| Average marks | Grade           |
|---------------|-----------------|
| 80 to 100     | Honours         |
| 60 to 79      | First Division  |
| 50 to 59      | Second Division |
| 40 to 49      | Third Division  |
| 0 to 39       | Fail            |

This grading can be done using the **else if** ladder as follows:

```
if (marks > 79)
 grade = "Honours";
else if (marks > 59)
 grade = "First Division";
else if (marks > 49)
 grade = "Second Division";
else if (marks > 39)
 grade = "Third Division";
else
 grade = "Fail";
printf ("%s\n", grade);
```

Consider another example given below:

```


if (code == 1)
 colour = "RED";
else if (code == 2)
 colour = "GREEN";
else if (code == 3)
 colour = "WHITE";
else
 colour = "YELLOW";

```

Code numbers other than 1, 2 or 3 are considered to represent YELLOW colour. The same results can be obtained by using nested **if...else** statements.

```
if (code != 1)
 if (code != 2)
 if (code != 3)
```

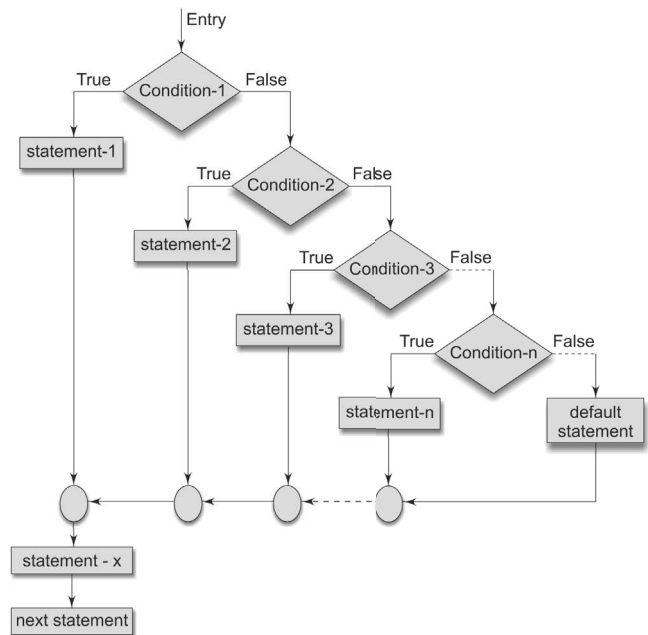


Fig. 2.9 Flow chart of **else..if** ladder

```

 colour = "YELLOW";
 else
 colour = "WHITE";
 else
 colour = "GREEN";
 else
 colour = "RED";

```

In such situations, the choice is left to the programmer. However, in order to choose an **if** structure that is both effective and efficient, it is important that the programmer is fully aware of the various forms of an **if** statement and the rules governing their nesting.

**EXAMPLE 2.5** An electric power distribution company charges its domestic consumers as follows:

| <i>Consumption Units</i> | <i>Rate of Charge</i>                        |
|--------------------------|----------------------------------------------|
| 0 – 200                  | Rs. 0.50 per unit                            |
| 201 – 400                | Rs. 100 plus Rs. 0.65 per unit excess of 200 |
| 401 – 600                | Rs. 230 plus Rs. 0.80 per unit excess of 400 |
| 601 and above            | Rs. 390 plus Rs. 1.00 per unit excess of 600 |

The program in Fig. 2.10 reads the customer number and power consumed and prints the amount to be paid by the customer.

**Program**

```

main()
{
 int units, custnum;
 float charges;
 printf("Enter CUSTOMER NO. and UNITS consumed\n");
 scanf("%d %d", &custnum, &units);
 if (units <= 200)
 charges = 0.5 * units;
 else if (units <= 400)
 charges = 100 + 0.65 * (units - 200);
 else if (units <= 600)
 charges = 230 + 0.8 * (units - 400);
 else
 charges = 390 + (units - 600);
 printf("\n\nCustomer No: %d: Charges = %.2f\n",
 custnum, charges);
}

```

**Output**

```

Enter CUSTOMER NO. and UNITS consumed 101 150
Customer No:101 Charges = 75.00

Enter CUSTOMER NO. and UNITS consumed 202 225
Customer No:202 Charges = 116.25

Enter CUSTOMER NO. and UNITS consumed 303 375
Customer No:303 Charges = 213.75

Enter CUSTOMER NO. and UNITS consumed 404 520
Customer No:404 Charges = 326.00

```

(Contd.)

## 2.12 Computer Programming

```
Enter CUSTOMER NO. and UNITS consumed 505 625
Customer No:505 Charges = 415.00
```

Fig. 2.10 Illustration of *else..if* ladder

### Rules for Indentation

When using control structures, a statement often controls many other statements that follow it. In such situations it is a good practice to use *indentation* to show that the indented statements are dependent on the preceding controlling statement. Some guidelines that could be followed while using indentation are listed below:

- Indent statements that are dependent on the previous statements; provide at least three spaces of indentation.
- Align vertically *else* clause with their matching *if* clause.
- Use braces on separate lines to identify a block of statements.
- Indent the statements in the block by at least three spaces to the right of the braces.
- Align the opening and closing braces.
- Use appropriate comments to signify the beginning and end of blocks.
- Indent the nested statements as per the above rules.
- Code only one clause or statement on each line.

## 2.7 THE SWITCH STATEMENT

We have seen that when one of the many alternatives is to be selected, we can use an **if** statement to control the selection. However, the complexity of such a program increases dramatically when the number of alternatives increases. The program becomes difficult to read and follow. At times, it may confuse even the person who designed it. Fortunately, C has a built-in multiway decision statement known as a **switch**. The **switch** statement tests the value of a given variable (or expression) against a list of **case** values and when a match is found, a block of statements associated with that **case** is executed. The general form of the **switch** statement is as shown below:

```
switch (expression)
{
 case value-1:
 block-1
 break;
 case value-2:
 block-2
 break;

 default:
 default-block
 break;
}
statement-x;
```

The *expression* is an integer expression or characters. *Value-1*, *value-2* ..... are constants or constant expressions (evaluable to an integral constant) and are known as *case labels*. Each of these values should be unique within a **switch** statement. **block-1**, **block-2** .... are statement lists and may contain zero or more statements. There is no need to put braces around these blocks. Note that **case** labels end with a colon (:).

When the **switch** is executed, the value of the expression is successfully compared against the values *value-1*, *value-2*,..... If a case is found whose value matches with the value of the expression, then the block of statements that follows the case are executed.



The **break** statement at the end of each block signals the end of a particular case and causes an exit from the **switch** statement, transferring the control to the **statement-x** following the **switch**.

The **default** is an optional case. When present, it will be executed if the value of the *expression* does not match with any of the case values. If not present, no action takes place if all matches fail and the control goes to the **statement-x**. (ANSI C permits the use of as many as 257 case labels).

The selection process of **switch** statement is illustrated in the flow chart shown in Fig. 2.11.

The **switch** statement can be used to grade the students as discussed in the last section. This is illustrated below:

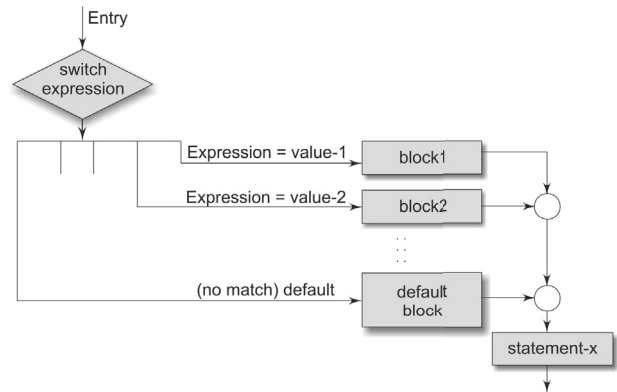


Fig. 2.11 Selection process of the **switch** statement

```


index = marks/10
switch (index)
{
 case 10:
 case 9:
 case 8:
 grade = "Honours";
 break;
 case 7:
 case 6:
 grade = "First Division";
 break;
 case 5:
 grade = "Second Division";
 break;
 case 4:
 grade = "Third Division";
 break;
 default:
 grade = "Fail";
 break;
}
printf("%s\n", grade);


```



NOTE: We have used a conversion statement

**index = marks / 10;**

where, index is defined as an integer. The variable index takes the following integer values.

| Marks   | Index |
|---------|-------|
| 100     | 10    |
| 90 – 99 | 9     |
| 80 – 89 | 8     |
| 70 – 79 | 7     |

## 2.14 Computer Programming

|         |   |
|---------|---|
| 60 – 69 | 6 |
| 50 – 59 | 5 |
| 40 – 49 | 4 |
| .       | . |
| .       | . |
| 0       | 0 |

This segment of the program illustrates two important features. First, it uses empty cases. The first three cases will execute the same statements

```
grade = "Honours";
break;
```

Same is the case with case 7 and case 6. Second, default condition is used for all other cases where marks is less than 40.

The **switch** statement is often used for menu selection. For example:

```


printf(" TRAVEL GUIDE\n\n");
printf(" A Air Timings\n");
printf(" T Train Timings\n");
printf(" B Bus Service\n");
printf(" X To skip\n");
printf("\n Enter your choice\n");
character = getchar();
switch (character)
{
 case 'A' :
 air-display();
 break;
 case 'B' :
 bus-display();
 break;
 case 'T' :
 train-display();
 break;
 default :
 printf(" No choice\n");
}


```

It is possible to nest the **switch** statements. That is, a **switch** may be part of a **case** statement. ANSI C permits 15 levels of nesting.

### Rules for Switch Statement

- The **switch** expression must be an integral type.
- Case labels must be constants or constant expressions.
- Case labels must be unique. No two labels can have the same value.
- Case labels must end with semicolon.
- The **break** statement transfers the control out of the **switch** statement.
- The **break** statement is optional. That is, two or more case labels may belong to the same statements.
- The **default** label is optional. If present, it will be executed when the expression does not find a matching case label.
- There can be at most one **default** label.
- The **default** may be placed anywhere but usually placed at the end.
- It is permitted to nest **switch** statements.

## 2.8 THE ? : OPERATOR

The C language has an unusual operator, useful for making two-way decisions. This operator is a combination of ? and :, and takes three operands. This operator is popularly known as the *conditional operator*. The general form of use of the conditional operator is as follows:

**Conditional expression ? expression1 : expression2**

The *conditional expression* is evaluated first. If the result is nonzero, *expression1* is evaluated and is returned as the value of the conditional expression. Otherwise, *expression2* is evaluated and its value is returned. For example, the segment

```
if (x < 0)
 flag = 0;
else
 flag = 1;
```

can be written as

```
flag = (x < 0) ? 0 : 1;
```

Consider the evaluation of the following function:

$y = 1.5x + 3$  for  $x \leq 2$

$y = 2x + 5$  for  $x > 2$

This can be evaluated using the conditional operator as follows:

```
y = (x > 2) ? (2 * x + 5) : (1.5 * x + 3);
```

The conditional operator may be nested for evaluating more complex assignment decisions. For example, consider the weekly salary of a salesgirl who is selling some domestic products. If  $x$  is the number of products sold in a week, her weekly salary is given by

$$\text{salary} = \begin{cases} 4x + 100 & \text{for } x < 40 \\ 300 & \text{for } x = 40 \\ 4.5x + 150 & \text{for } x > 40 \end{cases}$$

This complex equation can be written as

```
salary = (x != 40) ? ((x < 40) ? (4*x+100) : (4.5*x+150)) : 300;
```

The same can be evaluated using **if...else** statements as follows:

```
if (x <= 40)
 if (x < 40)
 salary = 4 * x+100;
 else
 salary = 300;
else
 salary = 4.5 * x+150;
```

When the conditional operator is used, the code becomes more concise and perhaps, more efficient. However, the readability is poor. It is better to use **if** statements when more than a single nesting of conditional operator is required.

**EXAMPLE 2.6** An employee can apply for a loan at the beginning of every six months, but he will be sanctioned the amount according to the following company rules:

*Rule 1* : An employee cannot enjoy more than two loans at any point of time.

*Rule 2* : Maximum permissible total loan is limited and depends upon the category of the employee.

## 2.16 Computer Programming

A program to process loan applications and to sanction loans is given in Fig. 2.12.

### Program

```
#define MAXLOAN 50000
main()
{
 long int loan1, loan2, loan3, sancloan, sum23;
 printf("Enter the values of previous two loans:\n");
 scanf(" %ld %ld", &loan1, &loan2);
 printf("\nEnter the value of new loan:\n");
 scanf(" %ld", &loan3);
 sum23 = loan2 + loan3;
 sancloan = (loan1>0)? 0 : ((sum23>MAXLOAN)?
 MAXLOAN - loan2 : loan3);
 printf("\n\n");
 printf("Previous loans pending:\n%ld %ld\n", loan1, loan2);
 printf("Loan requested = %ld\n", loan3);
 printf("Loan sanctioned = %ld\n", sancloan);
}
```

### Output

```
Enter the values of previous two loans:
0 20000
Enter the value of new loan:
45000
Previous loans pending:
0 20000
Loan requested = 45000
Loan sanctioned = 30000
Enter the values of previous two loans:
1000 15000
Enter the value of new loan:
25000
Previous loans pending:
1000 15000
Loan requested= 25000
Loan sanctioned = 0
```

**Fig. 2.12** Illustration of the conditional operator

The program uses the following variables:

- loan3** - present loan amount requested
- loan2** - previous loan amount pending
- loan1** - previous to previous loan pending
- sum23** - sum of loan2 and loan3
- sancloan** - loan sanctioned

The rules for sanctioning new loan are:

1. loan1 should be zero.
2. loan2 + loan3 should not be more than MAXLOAN.

Note the use of **long int** type to declare variables.

### Some Guidelines for Writing Multiway Selection Statements

Complex multiway selection statements require special attention. The readers should be able to understand the logic easily. Given below are guidelines that would help improve readability and facilitate maintenance.

- Avoid compound negative statements. Use positive statements wherever possible.
- Keep logical expressions simple. We can achieve this using nested if statements, if necessary (KISS - Keep It Simple and Short).
- Try to code the normal/anticipated condition first.
- Use the most probable condition first. This will eliminate unnecessary tests, thus improving the efficiency of the program.
- The choice between the nested if and switch statements is a matter of individual's preference. A good rule of thumb is to use the switch when alternative paths are three to ten.
- Use proper indentations (See Rules for Indentation).
- Have the habit of using default clause in switch statements.
- Group the case labels that have similar actions.

## 2.9 THE GOTO STATEMENT

So far we have discussed ways of controlling the flow of execution based on certain specified conditions. Like many other languages, C supports the **goto** statement to branch unconditionally from one point to another in the program. Although it may not be essential to use the **goto** statement in a highly structured language like C, there may be occasions when the use of **goto** might be desirable.

The **goto** requires a *label* in order to identify the place where the branch is to be made. A *label* is any valid variable name, and must be followed by a colon. The *label* is placed immediately before the statement where the control is to be transferred. The general forms of **goto** and *label* statements are shown below:



The *label:* can be anywhere in the program either before or after the **goto label;** statement.

During running of a program when a statement like **goto begin;**

is met, the flow of control will jump to the statement immediately following the label **begin:**. This happens unconditionally.

Note that a **goto** breaks the normal sequential execution of the program. If the *label:* is before the statement **goto label;** a loop will be formed and some statements will be executed repeatedly. Such a jump is known as a *backward jump*. On the other hand, if the *label:* is placed after the **goto label;** some statements will be skipped and the jump is known as a *forward jump*.

A **goto** is often used at the end of a program to direct the control to go to the input statement, to read further data. Consider the following example:

```
main()
{
 double x, y;
 read:
```

## 2.18 Computer Programming

```
scanf("%f", &x);
if (x < 0) goto read;
y = sqrt(x);
printf("%f %f\n", x, y);
goto read;
}
```

This program is written to evaluate the square root of a series of numbers read from the terminal. The program uses two **goto** statements, one at the end, after printing the results to transfer the control back to the input statement and the other to skip any further computation when the number is negative.

Due to the unconditional **goto** statement at the end, the control is always transferred back to the input statement. In fact, this program puts the computer in a permanent loop known as an *infinite loop*. The computer goes round and round until we take some special steps to terminate the loop. Such infinite loops should be avoided. Example 2.7 illustrates how such infinite loops can be eliminated.

**EXAMPLE 2.7** Program presented in Fig. 2.13 illustrates the use of the goto statement.

The program evaluates the square root for five numbers. The variable count keeps the count of numbers read. When count is less than or equal to 5, **goto read;** directs the control to the label **read;** otherwise, the program prints a message and stops.

### Program

```
#include <math.h>
main()
{
 double x, y;
 int count;
 count = 1;
 printf("Enter FIVE real values in a LINE \n");
read:
 scanf("%lf", &x);
 printf("\n");
 if (x < 0)
 printf("Value - %d is negative\n",count);
 else
 {
 y = sqrt(x);
 printf("%lf\t %lf\n", x, y);
 }
 count = count + 1;
 if (count <= 5)
 goto read;
 printf("\nEnd of computation");
}
```

### Output

```
Enter FIVE real values in a LINE
50.70 40 -36 75 11.25
50.750000 7.123903
```

(Contd.)

```

40.000000 6.324555
Value -3 is negative
75.000000 8.660254
11.250000 3.354102
End of computation

```

Fig. 2.13 Use of the goto statement

Another use of the **goto** statement is to transfer the control out of a loop (or nested loops) when certain peculiar conditions are encountered. Example:

```



while (----)
{
 for (----)
 {

 if (----)goto end_of_program;

 }

}
end_of_program:

```



We should try to avoid using **goto** as far as possible. But there is nothing wrong, if we use it to enhance the readability of the program or to improve the execution speed.

## Just Remember

- Be aware of dangling **else** statements.
- Be aware of any side effects in the control expression such as `if(x++)`.
- Use braces to encapsulate the statements in **if** and **else** clauses of an `if... else` statement.
- Check the use of `=` operator in place of the equal operator `==`.
- Do not give any spaces between the two symbols of relational operators `==`, `!=`, `>=` and `<=`.
- Writing `!=`, `>=` and `<=` operators like `!=`, `=>` and `=<` is an error.
- Remember to use two ampersands (`&&`) and two bars (`||`) for logical operators. Use of single operators will result in logical errors.
- Do not forget to place parentheses for the `if` expression.
- It is an error to place a semicolon after the `if` expression.
- Do not use the equal operator to compare two floating-point values. They are seldom exactly equal.
- Do not forget to use a `break` statement when the cases in a `switch` statement are exclusive.
- Although it is optional, it is a good programming practice to use the default clause in a `switch` statement.
- It is an error to use a variable as the value in a case label of a `switch` statement. (Only integral constants are allowed.)

## 2.20 Computer Programming

- Do not use the same constant in two case labels in a switch statement.
  - Avoid using operands that have side effects in a logical binary expression such as (x-- && ++y). The second operand may not be evaluated at all.
  - Try to use simple logical expressions.
  - Always use if and switch statements to add decision-making capabilities to your program.
  - If no braces are specified with an if block then by default the very next statement after the if clause is considered to be the only statement inside the if block. Same is the case with else clause.
  - An else clause has to be always preceded by an if clause.
  - Indent your program code properly so as to avoid getting confused in case of nested if-else statements.
  - It is permitted to nest switch statements.
  - Always avoid using goto statement.
- 

### Multiple Choice Questions

---

1. Which of the following is true for if statement?
  - (a) It is a looping construct
  - (b) It is a decision-making construct
  - (c) It is a logical construct
  - (d) None of the above
2. What will be the output of the following code (if a=2, b=3):  
If (a>b)  
    printf(" Inside if");  
else ;  
    printf("Inside else");
  - (a) Inside if                      (b) Inside else
  - (c) No output (Blank console)
  - (d) Compile time error
3. What happens if break statements are not included inside each case block?
  - (a) All the cases get executed
  - (b) Only the first case gets executed
  - (c) All the cases after the selected case get executed
  - (d) Only the default case gets executed
4. Which of the following statements are true for switch statement?
  - (a) It is mandatory to include a default case
  - (b) It is optional to include a default case
  - (c) It is mandatory to include at least one case in the switch block.
  - (d) There is no restriction on the number of cases that can be included in a switch statement
5. Which of the following is true for goto statement?
  - (a) It transfers the program control to the labelled position and later return to its original position.
  - (b) It transfers the program control to the labelled position and does not return to its original position.
  - (c) It is used inside a looping construct to exit the loop.
  - (d) It is used inside a looping construct to terminate the current iteration and start with the next iteration.
6. Which of the following is true for break statement?
  - (a) It is used to terminate the execution of the program
  - (b) It is used inside a looping construct to exit the loop.
  - (c) It is used inside a looping construct to terminate the current iteration and start with the next iteration.
  - (d) None of the above
7. Which of the following is true for continue statement?
  - (a) It is used to terminate the execution of the program at once and start the program all over again
  - (b) It is used inside a looping construct to terminate the current iteration and start with the next iteration.



- (c) It is used inside a looping construct to exit the loop.
- (d) None of the above
8. Which of the following is the correct syntax for goto statement?
- (a) goto label:            (b) goto label
- (c) goto label;            (d) goto (label);
9. Which of the following if-else blocks will not execute?
- (a) if (test expression)
- {
- Statement -block;
- }
- (b) if(test expression );{statement –block;}
- (c) if(test expression);
- (d) All of the above will execute

## Case Study

### 1. Range of Numbers

**Problem:** A survey of the computer market shows that personal computers are sold at varying costs by the vendors. The following is the list of costs (in hundreds) quoted by some vendors:

|        |        |        |        |        |
|--------|--------|--------|--------|--------|
| 35.00, | 40.50, | 25.00, | 31.25, | 68.15, |
| 47.00, | 26.65, | 29.00, | 53.45, | 62.50  |

Determine the average cost and the range of values.

**Problem analysis:** Range is one of the measures of dispersion used in statistical analysis of a series of values. The range of any series is the difference between the highest and the lowest values in the series. That is

$$\text{Range} = \text{highest value} - \text{lowest value}$$

It is therefore necessary to find the highest and the lowest values in the series.

**Program:** A program to determine the range of values and the average cost of a personal computer in the market is given in Fig. 2.14.

#### Program

```
main()
{
 int count;
 float value, high, low, sum, average, range;
 sum = 0;
 count = 0;
 printf("Enter numbers in a line :
 input a NEGATIVE number to end\n");

input:
 scanf("%f", &value);
 if (value < 0) goto output;
 count = count + 1;
 if (count == 1)
 high = low = value;
 else if (value > high)
 high = value;
 else if (value < low)
 low = value;
 sum = sum + value;
 goto input;
}
```

## 2.22 Computer Programming

### Output:

```
 average = sum/count;
 range = high - low;
 printf("\n\n");
 printf("Total values : %d\n", count);
 printf("Highest-value: %f\nLowest-value : %f\n",
 high, low);
 printf("Range : %f\nAverage : %f\n",
 range, average);
 }
```

### Output

```
Enter numbers in a line : input a NEGATIVE number to end
35 40.50 25 31.25 68.15 47 26.65 29 53.45 62.50 -1
Total values : 10
Highest-value : 68.150002
Lowest-value : 25.000000
Range : 43.150002
Average : 41.849998
```

Fig. 2.14 Calculation of range of values

When the value is read the first time, it is assigned to two buckets, **high** and **low**, through the statement

```
high = low = value;
```

For subsequent values, the value read is compared with high; if it is larger, the value is assigned to high. Otherwise, the value is compared with low; if it is smaller, the value is assigned to low. Note that at a given point, the buckets high and low hold the highest and the lowest values read so far.

The values are read in an input loop created by the **goto** input; statement. The control is transferred out of the loop by inputting a negative number. This is caused by the statement

```
if (value < 0) goto output;
```



**NOTE:** This program can be written without using goto statements. Try.

## 2. Pay-Bill Calculations

**Problem:** A manufacturing company has classified its executives into four levels for the benefit of certain perks. The levels and corresponding perks are shown below:

| Level | Perks                |                         |
|-------|----------------------|-------------------------|
|       | Conveyance allowance | Entertainment allowance |
| 1     | 1000                 | 500                     |
| 2     | 750                  | 200                     |
| 3     | 500                  | 100                     |
| 4     | 250                  | —                       |

An executive's gross salary includes basic pay, house rent allowance at 25% of basic pay and other perks. Income tax is withheld from the salary on a percentage basis as follows:

| <i>Gross salary</i>  | <i>Tax rate</i>  |
|----------------------|------------------|
| Gross <= 2000        | No tax deduction |
| 2000 < Gross <= 4000 | 3%               |
| 4000 < Gross <= 5000 | 5%               |
| Gross > 5000         | 8%               |

Write a program that will read an executive's job number, level number, and basic pay and then compute the net salary after withholding income tax.

**Problem analysis:**

Gross salary = basic pay + house rent allowance + perks

Net salary = Gross salary – income tax.

The computation of perks depends on the level, while the income tax depends on the gross salary. The major steps are:

1. Read data.
2. Decide level number and calculate perks.
3. Calculate gross salary.
4. Calculate income tax.
5. Compute net salary.
6. Print the results.

**Program:** A program and the results of the test data are given in Fig. 2.15. Note that the last statement should be an executable statement. That is, the label **stop**: cannot be the last line.

**Program**

```
#define CA1 1000
#define CA2 750
#define CA3 500
#define CA4 250
#define EA1 500
#define EA2 200
#define EA3 100
#define EA4 0
main()
{
 int level, jobnumber;
 float gross,
 basic,
 house_rent,
 perks,
 net,
 incometax;

 input:
 printf("\nEnter level, job number, and basic pay\n");
 printf("Enter 0 (zero) for level to END\n\n");
 scanf("%d", &level);
 if (level == 0) goto stop;
 scanf("%d %f", &jobnumber, &basic);
 switch (level)
```

(Contd.)

## 2.24 Computer Programming

```
{
 case 1:
 perks = CA1 + EA1;
 break;
 case 2:
 perks = CA2 + EA2;
 break;
 case 3:
 perks = CA3 + EA3;
 break;
 case 4:
 perks = CA4 + EA4;
 break;
 default:
 printf("Error in level code\n");
 goto stop;
}
house_rent = 0.25 * basic;
gross = basic + house_rent + perks;
if (gross <= 2000)
 incometax = 0;
else if (gross <= 4000)
 incometax = 0.03 * gross;
else if (gross <= 5000)
 incometax = 0.05 * gross;
else
 incometax = 0.08 * gross;
net = gross - incometax;
printf("%d %d %.2f\n", level, jobnumber, net);
goto input;
stop: printf("\n\nEND OF THE PROGRAM");
}
```

### Output

```
Enter level, job number, and basic pay
Enter 0 (zero) for level to END
1 1111 4000
1 1111 5980.00
Enter level, job number, and basic pay
Enter 0 (zero) for level to END
2 2222 3000
2 2222 4465.00
Enter level, job number, and basic pay
Enter 0 (zero) for level to END
3 3333 2000
3 3333 3007.00
Enter level, job number, and basic pay
Enter 0 (zero) for level to END
4 4444 1000
4 4444 1500.00
Enter level, job number, and basic pay
Enter 0 (zero) for level to END
0
END OF THE PROGRAM
```

**Fig. 2.15** Pay-bill calculations

## Review Questions

2.1 State whether the following are *true* or *false*:

- (a) When **if** statements are nested, the last **else** gets associated with the nearest **if** without an **else**.
- (b) One **if** can have more than one **else** clause.
- (c) A **switch** statement can always be replaced by a series of **if..else** statements.
- (d) A **switch** expression can be of any type.
- (e) A program stops its execution when a **break** statement is encountered.
- (f) Each expression in the **else if** must test the same variable.
- (g) Any expression can be used for the **if** expression.
- (h) Each case label can have only one statement.
- (i) The **default** case is required in the **switch** statement.
- (j) The predicate  $!(x \geq 10) \vee (y = 5)$  is equivalent to  $(x < 10) \wedge (y \neq 5)$ .

2.2 Fill in the blanks in the following statements.

- (a) The \_\_\_\_\_ operator is true only when both the operands are true.
- (b) Multiway selection can be accomplished using an else if statement or the \_\_\_\_\_ statement.
- (c) The \_\_\_\_\_ statement when executed in a **switch** statement causes immediate exit from the structure.
- (d) The ternary conditional expression using the operator **?:** could be easily coded using \_\_\_\_\_ statement.
- (e) The expression  $!(x \neq y)$  can be replaced by the expression \_\_\_\_\_.

2.3 Find errors, if any, in each of the following segments:

- (a) 

```
if (x + y = z && y > 0)
 printf(" ");
```
- (b) 

```
if (code > 1);
 a = b + c

else
 a = 0
```
- (c) 

```
if (p < 0) || (q < 0)
 printf (" sign is negative");
```

2.4 The following is a segment of a program:

```
x = 1;
y = 1;
if (n > 0)
 x = x + 1;
 y = y - 1;
printf(" %d %d", x, y);
```

What will be the values of *x* and *y* if *n* assumes a value of (a) 1 and (b) 0.

2.5 Rewrite each of the following without using compound relations:

- (a) 

```
if (grade <= 59 && grade >= 50)
 second = second + 1;
```
- (b) 

```
if (number > 100 || number < 0)
 printf(" Out of range");
else
 sum = sum + number;
```
- (c) 

```
if ((M1 > 60 && M2 > 60) || T > 200)
 printf(" Admitted\n");
else
 printf(" Not admitted\n");
```

2.6 Assuming *x* = 10, state whether the following logical expressions are true or false.

- (a)  $x = 10 \wedge x > 10 \wedge !x$
- (b)  $x = 10 \vee x > 10 \wedge !x$
- (c)  $x = 10 \wedge x > 10 \vee !x$
- (d)  $x = 10 \vee x > 10 \vee !x$

2.7 Find errors, if any, in the following switch related statements. Assume that the variables *x* and *y* are of int type and *x* = 1 and *y* = 2

- (a) 

```
switch (y);
```
- (b) 

```
case 10;
```
- (c) 

```
switch (x + y)
```
- (d) 

```
switch (x) {case 2: y = x + y; break};
```

2.8 Simplify the following compound logical expressions

- (a)  $!(x \leq 10)$
- (b)  $!(x = 10) \vee !((y = 5) \vee (z < 0))$
- (c)  $!(x + y = z) \wedge !(z > 5)$
- (d)  $!(x \leq 5) \wedge (y = 10) \wedge (z < 5)$

2.9 Assuming that *x* = 5, *y* = 0, and *z* = 1 initially, what will be their values after executing the following code segments?

## 2.26 Computer Programming

- (a) 

```
if (x && y)
 x = 10;
else
 y = 10;
```
- (b) 

```
if (x || y || z)
 y = 10;
else
 z = 0;
```
- (c) 

```
if (x)
 if (y)
 z = 10;
else
 z = 0;
```
- (d) 

```
if (x == 0 || x && y)
 if (!y)
 z = 0;
else
 y = 1;
```

2.10 Assuming that  $x = 2$ ,  $y = 1$  and  $z = 0$  initially, what will be their values after executing the following code segments?

- (a) 

```
switch (x)
{
 case 2:
 x = 1;
 y = x + 1;

 case 1:
 x = 0;
 break;

 default:
 x = 1;
 y = 0;
}
```
- (b) 

```
switch (y)
{
 case 0:
 x = 0;
 y = 0;

 case 2:
 x = 2;
 z = 2;

 default:
 x = 1;
 y = 2;
}
```

2.11 Find the error, if any, in the following statements:

- (a) 

```
if (x >= 10) then
 printf ("\n");
```
- (b) 

```
if x >= 10
 printf ("OK");
```
- (c) 

```
if (x = 10)
 printf ("Good");
```

- (d) 

```
if (x = < 10)
 printf ("Welcome");
```

2.12 What is the output of the following program?

```
main ()
{
 int m = 5 ;
 if (m < 3) printf("%d", m+1) ;
 else if(m < 5) printf("%d", m+2);
 else if(m < 7) printf("%d", m+3);
 else printf("%d", m+4);
}
```

2.13 What is the output of the following program?

```
main ()
{
 int m = 1;
 if (m==1)
 {
 printf (" Delhi ");
 if (m == 2)
 printf("Chennai");
 else
 printf("Bangalore");
 }
 else;
 printf(" END");
}
```

2.14 What is the output of the following program?

```
main()
{
 int m ;
 for (m = 1; m<5; m++)
 printf("%d\n", (m%2) ? m : m*2);
}
```

2.15 What is the output of the following program?

```
main()
{
 int m, n, p ;
 for (m = 0; m < 3; m++)
 for (n = 0; n<3; n++)
 for (p = 0; p < 3;; p++)
 if (m + n + p == 2)
 goto print;
 print :
 printf("%d, %d, %d", m, n, p);
}
```

2.16 What will be the value of  $x$  when the following segment is executed?

```
int x = 10, y = 15;
x = (x<y)? (y+x) : (y-x) ;
```

2.17 What will be the output when the following segment is executed?

```
int x = 0;
if (x >= 0)
```

```

if (x > 0)
printf("Number is positive");
else
printf("Number is negative");

```

- 2.18 What will be the output when the following segment is executed?

```

char ch = 'a' ;
switch (ch)
{
 case 'a' :
 printf("A") ;
 case 'b':
 Printf ("B") ;
 default :
 printf(" C ") ;
}

```

- 2.19 What will be the output of the following segment when executed?

```

int x = 10, y = 20;
if((x<y) || (x+5) > 10)
printf("%d", x);
else
printf("%d", y);

```

- 2.20 What will be output of the following segment when executed?

```

int a = 10, b = 5;
if (a > b)
{
 if(b > 5)
 printf("%d", b);
}
else
 printf("%d", a);

```

## Programming Exercises

- 2.1 Write a program to determine whether a given number is 'odd' or 'even' and print the message  
NUMBER IS EVEN

or

NUMBER IS ODD

- (a) without using **else** option, and  
(b) with **else** option.

- 2.2 Write a program to find the number of and sum of all integers greater than 100 and less than 200 that are divisible by 7.

- 2.3 A set of two linear equations with two unknowns  $x_1$  and  $x_2$  is given below:

$$ax_1 + bx_2 = m$$

$$cx_1 + dx_2 = n$$

The set has a unique solution

$$x_1 = \frac{md - bn}{ad - cb}$$

$$x_2 = \frac{na - mc}{ad - cb}$$

provided the denominator  $ad - cb$  is not equal to zero.

Write a program that will read the values of constants  $a, b, c, d, m$ , and  $n$  and compute the values of  $x_1$  and  $x_2$ . An appropriate message should be printed if  $ad - cb = 0$ .

- 2.4 Given a list of marks ranging from 0 to 100, write a program to compute and print the number of students:

- (a) who have obtained more than 80 marks,
- (b) who have obtained more than 60 marks,
- (c) who have obtained more than 40 marks,
- (d) who have obtained 40 or less marks,
- (e) in the range 81 to 100,
- (f) in the range 61 to 80,
- (g) in the range 41 to 60, and
- (h) in the range 0 to 40.

The program should use a minimum number of **if** statements.

- 2.5 Admission to a professional course is subject to the following conditions:

- (a) Marks in Mathematics  $\geq 60$
- (b) Marks in Physics  $\geq 50$
- (c) Marks in Chemistry  $\geq 40$
- (d) Total in all three subjects  $\geq 200$

or

Total in Mathematics and Physics  $\geq 150$

Given the marks in the three subjects, write a program to process the applications to list the eligible candidates.

## 2.28 Computer Programming

- 2.6 Write a program to print a two-dimensional Square Root Table as shown below, to provide the square root of any number from 0 to 9.9. For example, the value x will give the square root of 3.2 and y the square root of 3.9.

| Square Root Table |     |     |     |       |     |
|-------------------|-----|-----|-----|-------|-----|
| Number            | 0.0 | 0.1 | 0.2 | ..... | 0.9 |
| 0.0               |     |     |     |       |     |
| 1.0               |     |     |     |       |     |
| 2.0               |     |     |     |       |     |
| 3.0               |     |     | x   |       | y   |
| 9.0               |     |     |     |       |     |

- 2.7 Shown below is a Floyd's triangle.

```

1
2 3
4 5 6
7 8 9 10
11 15
.
.
79 91

```

- (a) Write a program to print this triangle.  
(b) Modify the program to produce the following form of Floyd's triangle.

```

1
0 1
1 0 1
0 1 0 1
1 0 1 0 1

```

- 2.8 A cloth showroom has announced the following seasonal discounts on purchase of items:

| Purchase amount | Discount | Handloom items |
|-----------------|----------|----------------|
| 0 – 100         | –        | 5%             |
| 101 – 200       | 5%       | 7.5%           |
| 201 – 300       | 7.5%     | 10.0%          |
| Above 300       | 10.0%    | 15.0%          |

Write a program using **switch** and **if** statements to compute the net amount to be paid by a customer.

- 2.9 Write a program that will read the value of x and evaluate the following function

$$y = \begin{cases} 1 & \text{for } x < 0 \\ 0 & \text{for } x = 0 \\ -1 & \text{for } x > 0 \end{cases}$$

using

- (a) nested if statements,  
(b) else if statements, and  
(c) conditional operator ? :

- 2.10 Write a program to compute the real roots of a quadratic equation

$$ax^2 + bx + c = 0$$

The roots are given by the equations

$$x_1 = -b + \frac{\sqrt{b^2 - 4ac}}{2a}$$

$$x_2 = -b - \frac{\sqrt{b^2 - 4ac}}{2a}$$

The program should request for the values of the constants a, b and c and print the values of  $x_1$  and  $x_2$ . Use the following rules:

- (a) No solution, if both a and b are zero  
(b) There is only one root, if  $a = 0$  ( $x = -c/b$ )  
(c) There are no real roots, if  $b^2 - 4ac$  is negative  
(d) Otherwise, there are two real roots  
Test your program with appropriate data so that all logical paths are working as per your design. Incorporate appropriate output messages.

- 2.11 Write a program to read three integer values from the keyboard and displays the output stating that they are the sides of right-angled triangle.

- 2.12 An electricity board charges the following rates for the use of electricity:  
For the first 200 units: 80 P per unit  
For the next 100 units: 90 P per unit  
Beyond 300 units: Rs 1.00 per unit  
All users are charged a minimum of Rs. 100 as meter charge. If the total amount is more than Rs. 400, then an additional surcharge of 15% of total amount is charged.

Write a program to read the names of users



and number of units consumed and print out the charges with names.

- 2.13 Write a program to compute and display the sum of all integers that are divisible by 6 but not divisible by 4 and lie between 0 and 100. The program should also count and display the number of such values.
- 2.14 Write an interactive program that could read a positive integer number and decide whether the number is a prime number and display the output accordingly.  
Modify the program to count all the prime numbers that lie between 100 and 200.



**NOTE:** A prime number is a positive integer that is divisible only by 1 or by itself.

- 2.15 Write a program to read a double®l-type value  $x$  that represents angle in radians and a character-type variable  $T$  that represents the type of trigonometric function and display the value of
- (a)  $\sin(x)$ , if  $s$  or  $S$  is assigned to  $T$ ,
  - (b)  $\cos(x)$ , if  $c$  or  $C$  is assigned to  $T$ , and
  - (c)  $\tan(x)$ , if  $t$  or  $T$  is assigned to  $T$
- using (i) **if.....else** statement and (ii) **switch** statement.

---

## Key Terms

---

- **Decision-making statements:** These statements control the flow of execution and make decisions to see whether a particular condition has occurred or not.
- **If statement:** It is a two-way decision statement used for controlling the flow of execution of statements.
- **Switch statement:** It is built-in multiway decision statement used for testing the value of a given variable against a list of case values.
- **Conditional operator:** It is an operator comprising of three operands that is used for making two-way decisions.
- **Goto statement:** It is a statement used to transfer the flow of execution unconditionally from one point to another in a program.
- **Break statement:** It is a statement used to transfer the control out of a construct.



# UNIT 3

## Arrays

### 3.1 INTRODUCTION

So far we have used only the fundamental data types, namely **char**, **int**, **float**, **double** and variations of **int** and **double**. Although these types are very useful, they are constrained by the fact that a variable of these types can store only one value at any given time. Therefore, they can be used only to handle limited amounts of data. In many applications, however, we need to handle a large volume of data in terms of reading, processing and printing. To process such large amounts of data, we need a powerful data type that would facilitate efficient storing, accessing and manipulation of data items. C supports a derived data type known as *array* that can be used for such applications.

An array is a *fixed-size* sequenced collection of elements of the same data type. It is simply a grouping of like-type data. In its simplest form, an array can be used to represent a list of numbers, or a list of names. Some examples where the concept of an array can be used:

- List of temperatures recorded every hour in a day, or a month, or a year.
- List of employees in an organization.
- List of products and their cost sold by a store.
- Test scores of a class of students.
- List of customers and their telephone numbers.
- Table of daily rainfall data.

and so on.

Since an array provides a convenient structure for representing data, it is classified as one of the *data structures* in C. Other data structures include structures, lists, queues and trees. A complete discussion of all data structures is beyond the scope of this text.

As we mentioned earlier, an array is a sequenced collection of related data items that share a common name. For instance, we can use an array name *salary* to represent a *set of salaries* of a group of employees in an organization. We can refer to the individual salaries by writing a number called *index* or *subscript* in brackets after the array name. For example,

**salary [10]**

represents the salary of 10<sup>th</sup> employee. While the complete set of values is referred to as an array, individual values are called *elements*.

The ability to use a single name to represent a collection of items and to refer to an item by specifying the item number enables us to develop concise and efficient programs. For example, we can use a loop construct, discussed earlier, with the subscript as the control variable to read the entire array, perform calculations, and print out the results.

## 3.2 Computer Programming

We can use arrays to represent not only simple lists of values but also tables of data in two, three or more dimensions. In this chapter, we introduce the concept of an array and discuss how to use it to create and apply the following types of arrays.

- One-dimensional arrays
- Two-dimensional arrays
- Multidimensional arrays

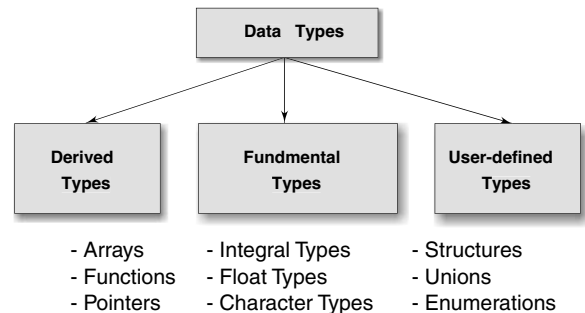
### Data Structures

C supports a rich set of derived and user-defined data types in addition to a variety of fundamental types as shown below:

Arrays and structures are referred to as *structured data types* because they can be used to represent data values that have a structure of some sort. Structured data types provide an organizational scheme that shows the relationships among the individual elements and facilitate efficient data manipulations. In programming parlance, such data types are known as *data structures*.

In addition to arrays and structures, C supports creation and manipulation of the following data structures:

- Linked Lists
- Stacks
- Queues
- Trees



## 3.2 ONE-DIMENSIONAL ARRAYS

A list of items can be given one variable name using only one subscript and such a variable is called a *single-subscripted variable* or a *one-dimensional array*. In mathematics, we often deal with variables that are single-subscripted. For instance, we use the equation

$$A = \frac{\sum_{i=1}^n x_i}{n}$$

to calculate the average of  $n$  values of  $x$ . The subscripted variable  $x_i$  refers to the  $i$ th element of  $x$ . In C, single-subscripted variable  $x_i$  can be expressed as

**$x[1], x[2], x[3], \dots, x[n]$**

The subscript can begin with number 0. That is

**$x[0]$**

is allowed. For example, if we want to represent a set of five numbers, say (35,40,20,57,19), by an array variable **number**, then we may declare the variable **number** as follows

**`int number[5];`**

and the computer reserves five storage locations as shown below:

|  |           |
|--|-----------|
|  | number[0] |
|  | number[1] |
|  | number[2] |
|  | number[3] |
|  | number[4] |

The values to the array elements can be assigned as follows:

```
number[0] = 35;
number[1] = 40;
number[2] = 20;
number[3] = 57;
number[4] = 19;
```

This would cause the array **number** to store the values as shown below:

|           |    |
|-----------|----|
| number[0] | 35 |
| number[1] | 40 |
| number[2] | 20 |
| number[3] | 57 |
| number[4] | 19 |

These elements may be used in programs just like any other C variable. For example, the following are valid statements:

```
a = number[0] + 10;
number[4] = number[0] + number [2];
number[2] = x[5] + y[10];
value[6] = number[i] * 3;
```

The subscripts of an array can be integer constants, integer variables like *i*, or expressions that yield integers. *C performs no bounds checking and, therefore, care should be exercised to ensure that the array indices are within the declared limits.*

### 3.3 DECLARATION OF ONE-DIMENSIONAL ARRAYS

Like any other variable, arrays must be declared before they are used so that the compiler can allocate space for them in memory. The general form of array declaration is

```
type variable-name[size];
```

The *type* specifies the type of element that will be contained in the array, such as **int**, **float**, or **char** and the *size* indicates the maximum number of elements that can be stored inside the array. For example,

```
float height[50];
```

declares the **height** to be an array containing 50 real elements. Any subscripts 0 to 49 are valid. Similarly,

```
int group[10];
```

declares the **group** as an array to contain a maximum of 10 integer constants. Remember:

- Any reference to the arrays outside the declared limits would not necessarily cause an error. Rather, it might result in unpredictable program results.
- The size should be either a numeric constant or a symbolic constant.

The C language treats character strings simply as arrays of characters. The *size* in a character string represents the maximum number of characters that the string can hold. For instance,

```
char name[10];
```

declares the **name** as a character array (string) variable that can hold a maximum of 10 characters. Suppose we read the following string constant into the string variable **name**.

```
"WELL DONE"
```

### 3.4 Computer Programming

Each character of the string is treated as an element of the array **name** and is stored in the memory as follows:

|      |
|------|
| 'W'  |
| 'E'  |
| 'L'  |
| 'L'  |
| ','  |
| 'D'  |
| 'O'  |
| 'N'  |
| 'E'  |
| '\0' |

When the compiler sees a character string, it terminates it with an additional null character. Thus, the element **name[10]** holds the null character **'\0'**. *When declaring character arrays, we must allow one extra element space for the null terminator.*

**EXAMPLE 3.1** Write a program using a single-subscripted variable to evaluate the following expressions:

$$\text{Total} = \sum_{i=1}^n x_i^2$$

The values of  $x_1, x_2, \dots$  are read from the terminal.

Program in Fig. 3.1 uses a one-dimensional array **x** to read the values and compute the sum of their squares.

#### Program

```
main()
{
 int i ;
 float x[10], value, total ;

 /*READING VALUES INTO ARRAY */

 printf("ENTER 10 REAL NUMBERS\n") ;

 for(i = 0 ; i < 10 ; i++)
 {
 scanf("%f", &value) ;
 x[i] = value ;
 }

 /*COMPUTATION OF TOTAL */

 total = 0.0 ;
```

(Contd.)

```

 for(i = 0 ; i < 10 ; i++)
 total = total + x[i] * x[i] ;

 /*. . . PRINTING OF x[i] VALUES AND TOTAL . . . */

 printf("\n");
 for(i = 0 ; i < 10 ; i++)
 printf("x[%2d] = %5.2f\n", i+1, x[i]) ;

 printf("\ntotal = %5.2f\n", total) ;
}

```

**Output**

ENTER 10 REAL NUMBERS

1.1 2.2 3.3 4.4 5.5 6.6 7.7 8.8 9.9 10.10

```

x[1] = 1.10
x[2] = 2.20
 x[3] = 3.30
 x[4] = 4.40
 x[5] = 5.50
 x[6] = 6.60
 x[7] = 7.70
 x[8] = 8.80
 x[9] = 9.90
 x[10] = 10.10

 Total = 446.86

```

**Fig. 3.1** Program to illustrate one-dimensional array



**NOTE:** C99 permits arrays whose size can be specified at run time. See Appendix ‘C99 Features’.

## 3.4 INITIALIZATION OF ONE-DIMENSIONAL ARRAYS

After an array is declared, its elements must be initialized. Otherwise, they will contain “garbage”. An array can be initialized at either of the following stages:

- At compile time
- At run time

### 3.4.1 Compile Time Initialization

We can initialize the elements of arrays in the same way as the ordinary variables when they are declared. The general form of initialization of arrays is:

```
type array_name[size]={ column_size };
```

### 3.6 Computer Programming

The values in the list are separated by commas. For example, the statement

```
int number[3] = { 0,0,0 };
```

will declare the variable **number** as an array of size 3 and will assign zero to each element. If the number of values in the list is less than the number of elements, then only that many elements will be initialized. The remaining elements will be set to zero automatically. For instance,

```
float total[5] = {0.0,15.75,-10};
```

will initialize the first three elements to 0.0, 15.75, and -10.0 and the remaining two elements to zero.

The *size* may be omitted. In such cases, the compiler allocates enough space for all initialized elements. For example, the statement

```
int counter[] = {1,1,1,1};
```

will declare the **counter** array to contain four elements with initial values 1. This approach works fine as long as we initialize every element in the array.

Character arrays may be initialized in a similar manner. Thus, the statement

```
char name[] = {'J','o','h','n','\0'};
```

declares the **name** to be an array of five characters, initialized with the string “John” ending with the null character. Alternatively, we can assign the string literal directly as under:

```
char name [] = "John";
```

(Character arrays and strings are discussed in detail in Chapter 10.)

Compile time initialization may be partial. That is, the number of initializers may be less than the declared size. In such cases, the remaining elements are initialized to *zero*, if the array type is numeric and *NULL* if the type is char. For example,

```
int number [5] = {10, 20};
```

will initialize the first two elements to 10 and 20 respectively, and the remaining elements to 0. Similarly, the declaration

```
char city [5] = {'B'};
```

will initialize the first element to ‘B’ and the remaining four to NULL. It is a good idea, however, to declare the size explicitly, as it allows the compiler to do some error checking.

Remember, however, if we have more initializers than the declared size, the compiler will produce an error. That is, the statement

```
int number [3] = {10, 20, 30, 40};
```

will not work. It is illegal in C.

#### 3.4.2 Run Time Initialization

An array can be explicitly initialized at run time. This approach is usually applied for initializing large arrays. For example, consider the following segment of a C program.

```


for (i = 0; i < 100; i = i+1)
{
 if i < 50
 sum[i] = 0.0; /* assignment statement */
```



```

else
 sum[i] = 1.0;
}


```

The first 50 elements of the array **sum** are initialized to zero while the remaining 50 elements are initialized to 1.0 at run time.

We can also use a read function such as **scanf** to initialize an array. For example, the statements

```

int x [3];
scanf ("%d%d%d", &x[0], &x[1], &x[2]);

```

will initialize array elements with the values entered through the keyboard.

**EXAMPLE 3.2** Given below is the list of marks obtained by a class of 50 students in an annual examination.

```

43 65 51 27 79 11 56 61 82 09 25 36 07 49 55 63 74 81 49 37
40 49 16 75 87 91 33 24 58 78 65 56 76 67 45 54 36 63 12 21
73 49 51 19 39 49 68 93 85 59

```

Write a program to count the number of students belonging to each of following groups of marks: 0–9, 10–19, 20–29,.....,100.

The program coded in Fig. 3.2 uses the array **group** containing 11 elements, one for each range of marks. Each element counts those values falling within the range of values it represents.

For any value, we can determine the correct group element by dividing the value by 10. For example, consider the value 59. The integer division of 59 by 10 yields 5. This is the element into which 59 is counted.

**Program**

```

#define MAXVAL 50
#define COUNTER 11
main()
{
 float value[MAXVAL];
 int i, low, high;
 int group[COUNTER] = {0,0,0,0,0,0,0,0,0,0,0};
 /*READING AND COUNTING */
 for(i = 0 ; i < MAXVAL ; i++)
 {
 /*.READING OF VALUES */
 scanf("%f", &value[i]) ;
 /*.COUNTING FREQUENCY OF GROUPS. */
 ++ group[(int) (value[i]) / 10] ;
 }
 /*PRINTING OF FREQUENCY TABLE */
 printf("\n");
 printf(" GROUP RANGE FREQUENCY\n\n") ;

```

(Contd.)

### 3.8 Computer Programming

```
for(i = 0 ; i < COUNTER ; i++)
{
 low = i * 10 ;
 if(i == 10)
 high = 100 ;

 else
 high = low + 9 ;
 printf(" %2d %3d to %3d %d\n",
 i+1, low, high, group[i]) ;
}
}
```

**Output**

```
43 65 51 27 79 11 56 61 82 09 25 36 07 49 55 63 74
81 49 37 40 49 16 75 87 91 33 24 58 78 65 56 76 67 (Input data)
45 54 36 63 12 21 73 49 51 19 39 49 68 93 85 59
```

| GROUP | RANGE      | FREQUENCY |
|-------|------------|-----------|
| 1     | 0 to 9     | 2         |
| 2     | 10 to 19   | 4         |
| 3     | 20 to 29   | 4         |
| 4     | 30 to 39   | 5         |
| 5     | 40 to 49   | 8         |
| 6     | 50 to 59   | 8         |
| 7     | 60 to 69   | 7         |
| 8     | 70 to 79   | 6         |
| 9     | 80 to 89   | 4         |
| 10    | 90 to 99   | 2         |
| 11    | 100 to 100 | 0         |

**Fig. 3.2** Program for frequency counting

Note that we have used an initialization statement.

```
int group [COUNTER] = {0,0,0,0,0,0,0,0,0,0};
```

which can be replaced by

```
int group [COUNTER] = {0};
```

This will initialize all the elements to zero.

#### Searching and Sorting

Searching and sorting are the two most frequent operations performed on arrays. Computer Scientists have devised several data structures and searching and sorting techniques that facilitate rapid access to data stored in lists.

*Sorting* is the process of arranging elements in the list according to their values, in ascending or descending order. A sorted list is called an *ordered list*. Sorted lists are especially important in list searching because they facilitate rapid search operations. Many sorting techniques are available. The three simple and most important among them are:

- Bubble sort
- Selection sort
- Insertion sort

Other sorting techniques include Shell sort, Merge sort and Quick sort.

*Searching* is the process of finding the location of the specified element in a list. The specified element is often called the *search key*. If the process of searching finds a match of the search key with a list element value, the search said to be successful; otherwise, it is unsuccessful. The two most commonly used search techniques are:

- Sequential search
- Binary search

A detailed discussion on these techniques is beyond the scope of this text. Consult any good book on data structures and algorithms.

**EXAMPLE 3.3** Write a program for sorting the elements of an array in descending order.

1. Set the size  $n$  of an array.
2. Store  $n$  elements in the array.
3. Read and store elements of the array in descending order.
4. Print the elements of array in descending order.

Figure 3.3 gives a program to implement this algorithm.

**Program**

```
#include <stdio.h>
#include <conio.h>
void main()
{
 int *arr,temp,i,j,n;
 clrscr();
 printf("Enter the number of elements in the array:");
 scanf("%d",&n);
 arr=(int*)malloc(sizeof(int)*n);
 for(i=0;i<n;i++)
 {
 printf("Enter a number:");
 scanf("%d",&arr[i]);
 }
 for(i=0;i<n;i++)
 {
 for(j=i+1;j<n;j++)
 {
 if(arr[i]<arr[j])
 {
 temp=arr[i];
 arr[i]=arr[j];
 arr[j]=temp;
 }
 }
 }
 printf("Elements of array in descending order are:\n");
 for(i=0;i<n;i++)
 printf("%d\n",arr[i]);
 getch();
}
```

(Contd.)

### 3.10 Computer Programming

**Output**

```
Enter the number of elements in the array:5
Enter a number:32
Enter a number:43
Enter a number:23
Enter a number:57
Enter a number:47
Elements of array in descending order are:
57
47
43
32
23
```

**Fig. 3.3** Program to sort the elements of an array in descending order

**EXAMPLE 3.4** Write a program for finding the largest number in an array.

1. Set the size of the array as  $n$ .
2. Store  $n$  elements in the array.
3. Assign the first element of the array to LARGE.
4. Compare each element in the array with LARGE.
5. If an element of the array is greater than LARGE, then set LARGE=element.
6. Else go to step 4.
7. Repeat this process until it reaches the last element of the array.
8. Print the largest element found in the array.

Figure 3.4 gives a program to implement this algorithm.

**Program**

```
#include <stdio.h>
#include <conio.h>
void main()
{
 int *arr,i,j,n,LARGE;
 clrscr();
 printf("Enter the number of elements in the array:");
 scanf("%d",&n);
 arr=(int*)malloc(sizeof(int)*n);
 for(i=0;i<n;i++)
 {
 printf("Enter a number:");
 scanf("%d",&arr[i]);
 }
 LARGE=arr[0];
```

(Contd.)

```

 for(i=1;i<n;i++)
 {
 if(arr[i]>LARGE)
 LARGE=arr[i];
 }
 printf("The largest number in the array is: %d",LARGE);
 getch();
}

```

**Output**

```

Enter the number of elements in the array:5
Enter a number:32
Enter a number:43
Enter a number:23
Enter a number:57
Enter a number:47
The largest number in the array is:57

```

**Fig. 3.4** Program to find the largest element in an array

**EXAMPLE 3.5** Write a program for removing the duplicate element in an array.

1. Set the size  $n$  of an array.
  2. Store  $n$  elements in the array.
  3. Read and store elements of the array in a sorted order.
  4. Compare the first element with the next element.
  5. If elements are identical, then replace that element by shift complete array.
  6. Else start comparing element with the current element.
  7. Repeat this process until it reaches the last element of the array.
  8. Print the new array without duplicate elements.
- A program to implement this is given in Fig. 3.5.

**Program**

```

#include <stdio.h>
#include <conio.h>
#include <stdlib.h>
int main()
{
 int *arr,i,j,n,x,temp;
 clrscr();
 printf("Enter the number of elements in the array:");
 scanf("%d",&n);
 arr=(int*)malloc(sizeof(int)*n);
 for(i=0;i<n;i++)
 {
 printf("Enter a number:");
 scanf("%d",&arr[i]);
 }
}

```

(Contd.)

### 3.12 Computer Programming

```
for(i=0;i<n;i++)
{
 for(j=i+1;j<n;j++)
 {
 if(arr[i]>arr[j])
 {
 temp=arr[i];
 arr[i]=arr[j];
 arr[j]=temp;
 }
 }
}
printf("\nElements of array after sorting:");
for(i=0;i<n;i++)
 printf("\n%d",arr[i]);

i=0;
j=1;
while(i<n)
{
 if(arr[i]==arr[j])
 {
 for(x=j;x<n-1;x++)
 arr[x]=arr[x+1];

 n--;
 }
 else
 {
 i++;
 j++;
 }
}
printf("\nElements of array after removing duplicate elements:");
for(i=0;i<=n;i++)
 printf("\n%d",arr[i]);

getch();
}
```

#### Output

```
Enter the number of elements in the array:5
Enter a number:3
Enter a number:3
Enter a number:4
Enter a number:6
Enter a number:4
Elements of array after sorting:
3
3
4
4
6
Elements of array after removing duplicate elements:
3
4
6
```

**Fig. 3.5** Program to sort the elements of an array and removing duplicate elements

**EXAMPLE 3.6** Write a program for finding the desired  $k^{\text{th}}$  smallest element in an array.

1. Set the size  $n$  of an array.
2. Store  $n$  elements in the array.
3. Read and store elements of the array in an ascending order.
4. Print the  $k^{\text{th}}$  elements of sorted array.

A program is given in Fig. 3.6.

**Program**

```
#include <stdio.h>
#include <conio.h>
void main()
{
 int *arr,i,j,n,temp,k;
 clrscr();
 printf("Enter the number of elements in the array:");
 scanf("%d",&n);
 arr=(int*)malloc(sizeof(int)*n);
 for(i=0;i<n;i++)
 {
 printf("Enter a number:");
 scanf("%d",&arr[i]);
 }
 for(i=0;i<n;i++)
 {
 for(j=i+1;j<n;j++)
 {
 if(arr[i]>arr[j])
 {
 temp=arr[i];
 arr[i]=arr[j];
 arr[j]=temp;
 }
 }
 }
 printf("\nElements of array after sorting:");
 for(i=0;i<n;i++)
 printf("\n%d",arr[i]);
 printf("\n\nWhich smallest element do you want to determine?");
 scanf("%d",&k);
 if(k<=n)
 printf("\nDesired smallest element is %d.",arr[k-1]);
 else
 printf("Please enter a valid value for finding the particular
smallest element");
 getch();
}
```

**Output**

```
Enter the number of elements in the array:5
Enter a number:33
```

(Contd.)

### 3.14 Computer Programming

```
Enter a number:32
Enter a number:46
Enter a number:68
Enter a number:47
Elements of array after sorting:
32
33
46
47
68
Which smallest element do you want to determine?3
Desired smallest element is 46.
```

Fig. 3.6 Program to determine  $K^{\text{th}}$  smallest element in an array

## 3.5 TWO-DIMENSIONAL ARRAYS

So far we have discussed the array variables that can store a list of values. There could be situations where a table of values will have to be stored. Consider the following data table, which shows the value of sales of three items by four sales girls:

|              | <i>Item1</i> | <i>Item2</i> | <i>Item3</i> |
|--------------|--------------|--------------|--------------|
| Salesgirl #1 | 310          | 275          | 365          |
| Salesgirl #2 | 210          | 190          | 325          |
| Salesgirl #3 | 405          | 235          | 240          |
| Salesgirl #4 | 260          | 300          | 380          |

The table contains a total of 12 values, three in each line. We can think of this table as a matrix consisting of four *rows* and three *columns*. Each row represents the values of sales by a particular salesgirl and each column represents the values of sales of a particular item.

In mathematics, we represent a particular value in a matrix by using two subscripts such as  $v_{ij}$ . Here  $v$  denotes the entire matrix and  $v_{ij}$  refers to the value in the  $i^{\text{th}}$  row and  $j^{\text{th}}$  column. For example, in the above table  $v_{23}$  refers to the value 325.

C allows us to define such tables of items by using two-dimensional arrays. The table discussed above can be defined in C as

`v[4][3]`

Two-dimensional arrays are declared as follows:

```
type array_name [row_size][column_size];
```

Note that unlike most other languages, which use one pair of parentheses with commas to separate array sizes, C places each size in its own set of brackets.

Two-dimensional arrays are stored in memory, as shown in Fig. 3.7. As with the single-dimensional

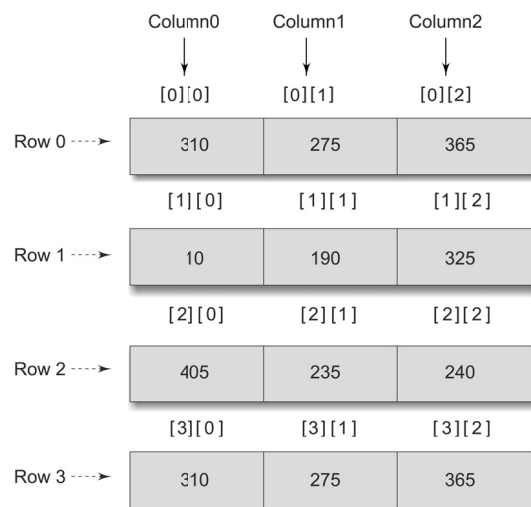


Fig. 3.7 Representation of a two-dimensional array in memory



arrays, each dimension of the array is indexed from zero to its maximum size minus one; the first index selects the row and the second index selects the column within that row.

**EXAMPLE 3.7** Write a program using a two-dimensional array to compute and print the following information from the table of data discussed above:

- (a) Total value of sales by each girl.
- (b) Total value of each item sold.
- (c) Grand total of sales of all items by all girls.

The program and its output are shown in Fig. 3.8. The program uses the variable **value** in two-dimensions with the index *i* representing girls and *j* representing items. The following equations are used in computing the results:

$$(a) \text{ Total sales by } m^{\text{th}} \text{ girl} = \sum_{j=0}^2 \text{value}[m][j] \quad (\text{girl\_total}[m])$$

$$(b) \text{ Total value of } n^{\text{th}} \text{ item} = \sum_{i=0}^3 \text{value}[i][n] \quad (\text{item\_total}[n])$$

$$\begin{aligned} (c) \text{ Grand total} &= \sum_{i=0}^3 \sum_{j=0}^2 \text{value}[i][j] \\ &= \sum_{i=0}^3 \text{girl\_total}[i] \\ &= \sum_{j=0}^2 \text{item\_total}[j] \end{aligned}$$

**Program**

```
#define MAXGIRLS 4
#define MAXITEMS 3
main()
{
 int value[MAXGIRLS][MAXITEMS];
 int girl_total[MAXGIRLS], item_total[MAXITEMS];
 int i, j, grand_total;
 /*.....READING OF VALUES AND COMPUTING girl_total ...*/

 printf("Input data\n");
 printf("Enter values, one at a time, row-wise\n\n");

 for(i = 0 ; i < MAXGIRLS ; i++)
 {
 girl_total[i] = 0;
```

(Contd.)

### 3.16 Computer Programming

```
 for(j = 0 ; j < MAXITEMS ; j++)
 {
 scanf("%d", &value[i][j]);
 girl_total[i] = girl_total[i] + value[i][j];
 }
 }
 /*.....COMPUTING item_total.....*/

 for(j = 0 ; j < MAXITEMS ; j++)
 {
 item_total[j] = 0;
 for(i =0 ; i < MAXGIRLS ; i++)
 item_total[j] = item_total[j] + value[i][j];
 }
 /*.....COMPUTING grand_total.....*/

 grand_total = 0;
 for(i =0 ; i < MAXGIRLS ; i++)
 grand_total = grand_total + girl_total[i];
 /*PRINTING OF RESULTS.....*/

 printf("\n GIRLS TOTALS\n\n");
 for(i = 0 ; i < MAXGIRLS ; i++)
 printf("Salesgirl[%d] = %d\n", i+1, girl_total[i]);
 printf("\n ITEM TOTALS\n\n");
 for(j = 0 ; j < MAXITEMS ; j++)
 printf("Item[%d] = %d\n", j+1 , item_total[j]);
 printf("\nGrand Total = %d\n", grand_total);
}
```

#### Output

Input data  
Enter values, one at a time, row\_wise

310 257 365  
210 190 325  
405 235 240  
260 300 380

GIRLS TOTALS

Salesgirl[1] = 950  
Salesgirl[2] = 725  
Salesgirl[3] = 880  
Salesgirl[4] = 940

ITEM TOTALS

Item[1] = 1185  
Item[2] = 1000  
Item[3] = 1310  
Grand Total = 3495

**Fig. 3.8** Illustration of two-dimensional arrays

**EXAMPLE 3.8** Write a program to compute and print a multiplication table for numbers 1 to 5 as shown below:

|   | 1 | 2  | 3 | 4 | 5  |
|---|---|----|---|---|----|
| 1 | 1 | 2  | 3 | 4 | 5  |
| 2 | 2 | 4  | 6 | 8 | 10 |
| 3 | 3 | 6  | . | . | .  |
| 4 | 4 | 8  | . | . | .  |
| 5 | 5 | 10 | . | . | 25 |

The program shown in Fig. 3.9 uses a two-dimensional array to store the table values. Each value is calculated using the control variables of the nested for loops as follows:

$$\text{product}[i][j] = \text{row} * \text{column}$$

where  $i$  denotes rows and  $j$  denotes columns of the product table. Since the indices  $i$  and  $j$  range from 0 to 4, we have introduced the following transformation:

$$\begin{aligned} \text{row} &= i+1 \\ \text{column} &= j+1 \end{aligned}$$

**Program**

```
#define ROWS 5
#define COLUMNS 5
main()
{
 int row, column, product[ROWS][COLUMNS] ;
 int i, j ;
 printf(" MULTIPLICATION TABLE\n\n") ;
 printf(" ") ;
 for(j = 1 ; j <= COLUMNS ; j++)
 printf("%4d" , j) ;
 printf("\n") ;
 printf("-----\n");
 for(i = 0 ; i < ROWS ; i++)
 {
 row = i + 1 ;
 printf("%2d |", row) ;
 for(j = 1 ; j <= COLUMNS ; j++)
 {
 column = j ;
 product[i][j] = row * column ;
 printf("%4d", product[i][j]) ;
 }
 printf("\n") ;
 }
}
```

(Contd.)

**Output**

| MULTIPLICATION TABLE |   |    |    |    |    |
|----------------------|---|----|----|----|----|
|                      | 1 | 2  | 3  | 4  | 5  |
| 1                    | 1 | 2  | 3  | 4  | 5  |
| 2                    | 2 | 4  | 6  | 8  | 10 |
| 3                    | 3 | 6  | 9  | 12 | 15 |
| 4                    | 4 | 8  | 12 | 16 | 20 |
| 5                    | 5 | 10 | 15 | 20 | 25 |

**Fig. 3.9** Program to print multiplication table using two-dimensional array**3.6 INITIALIZING TWO-DIMENSIONAL ARRAYS**

Like the one-dimensional arrays, two-dimensional arrays may be initialized by following their declaration with a list of initial values enclosed in braces. For example,

```
int table[2][3] = { 0,0,0,1,1,1};
```

initializes the elements of the first row to zero and the second row to one. The initialization is done row by row. The above statement can be equivalently written as

```
int table[2][3] = {{0,0,0}, {1,1,1}};
```

by surrounding the elements of the each row by braces.

We can also initialize a two-dimensional array in the form of a matrix as shown below:

```
int table[2][3] = {
 {0,0,0},
 {1,1,1}
};
```

Note the syntax of the above statements. Commas are required after each brace that closes off a row, except in the case of the last row.

When the array is completely initialized with all values, explicitly, we need not specify the size of the first dimension. That is, the statement

```
int table [] [3] = {
 { 0, 0, 0},
 { 1, 1, 1}
};
```

is permitted.

If the values are missing in an initializer, they are automatically set to zero. For instance, the statement

```
int table[2][3] = {
 {1,1},
 {2}
};
```

will initialize the first two elements of the first row to one, the first element of the second row to two, and all other elements to zero.

When all the elements are to be initialized to zero, the following short-cut method may be used.

```
int m[3][5] = { {0}, {0}, {0}};
```

The first element of each row is explicitly initialized to zero while other elements are automatically initialized to zero. The following statement will also achieve the same result:

```
int m [3] [5] = { 0, 0};
```

**EXAMPLE 3.9** A survey to know the popularity of four cars (Ambassador, Fiat, Dolphin and Maruti) was conducted in four cities (Bombay, Calcutta, Delhi and Madras). Each person surveyed was asked to give his city and the type of car he was using. The results, in coded form, are tabulated as follows:

|   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|
| M | 1 | C | 2 | B | 1 | D | 3 | M | 2 | B | 4 |
| C | 1 | D | 3 | M | 4 | B | 2 | D | 1 | C | 3 |
| D | 4 | D | 4 | M | 1 | M | 1 | B | 3 | B | 3 |
| C | 1 | C | 1 | C | 2 | M | 4 | M | 4 | C | 2 |
| D | 1 | C | 2 | B | 3 | M | 1 | B | 1 | C | 2 |
| D | 3 | M | 4 | C | 1 | D | 2 | M | 3 | B | 4 |

Codes represent the following information:

|              |                |
|--------------|----------------|
| M – Madras   | 1 – Ambassador |
| D – Delhi    | 2 – Fiat       |
| C – Calcutta | 3 – Dolphin    |
| B – Bombay   | 4 – Maruti     |

Write a program to produce a table showing popularity of various cars in four cities.

A two-dimensional array **frequency** is used as an accumulator to store the number of cars used, under various categories in each city. For example, the element **frequency** [i][j] denotes the number of cars of type j used in city i. The **frequency** is declared as an array of size  $5 \times 5$  and all the elements are initialized to zero.

The program shown in Fig. 3.10 reads the city code and the car code, one set after another, from the terminal. Tabulation ends when the letter X is read in place of a city code.

#### Program

```
main()
{
 int i, j, car;
 int frequency[5][5] = { {0},{0},{0},{0},{0} };
 char city;
 printf("For each person, enter the city code \n");
 printf("followed by the car code.\n");
 printf("Enter the letter X to indicate end.\n");
 /* TABULATION BEGINS */
 for(i = 1 ; i < 100 ; i++)
 {
 scanf("%c", &city);
 if(city == 'X')
 break;
 scanf("%d", &car);
 switch(city)
 {
 case 'B' : frequency[1][car]++;
 break;
 case 'C' : frequency[2][car]++;
 break;
```

(Contd.)

### 3.20 Computer Programming

```
 case 'D' : frequency[3][car]++;
 break;
 case 'M' : frequency[4][car]++;

 break;
 }
}
/* TABULATION COMPLETED AND PRINTING BEGINS. . . . */
printf("\n\n");
printf(" POPULARITY TABLE\n\n");
printf("_____\n");
printf("City Ambassador Fiat Dolphin Maruti \n");

printf("_____\n");
for(i = 1 ; i <= 4 ; i++)
{
 switch(i)
 {
 case 1 : printf("Bombay ") ;
 break ;
 case 2 : printf("Calcutta ") ;
 break ;
 case 3 : printf("Delhi ") ;
 break ;
 case 4 : printf("Madras ") ;
 break ;
 }
 for(j = 1 ; j <= 4 ; j++)
 printf("%7d", frequency[i][j]) ;
 printf("\n") ;
}
printf("_____\n");
/* PRINTING ENDS. */
}
```

**Output**

For each person, enter the city code  
followed by the car code.

Enter the letter X to indicate end.

M 1 C 2 B 1 D 3 M 2 B 4

C 1 D 3 M 4 B 2 D 1 C 3

D 4 D 4 M 1 M 1 B 3 B 3

C 1 C 1 C 2 M 4 M 4 C 2

D 1 C 2 B 3 M 1 B 1 C 2

D 3 M 4 C 1 D 2 M 3 B 4 X

| POPULARITY TABLE |            |      |         |        |   |
|------------------|------------|------|---------|--------|---|
| City             | Ambassador | Fiat | Dolphin | Maruti |   |
| Bombay           | 2          | 1    | 3       |        | 2 |
| Calcutta         | 4          | 5    | 1       |        | 0 |
| Delhi            | 2          | 1    | 3       |        | 2 |
| Madras           | 4          | 1    | 1       |        | 4 |

**Fig. 3.10** Program to tabulate a survey data

### Memory Layout

The subscripts in the definition of a two-dimensional array represent rows and columns. This format maps the way that data elements are laid out in the memory. The elements of all arrays are stored contiguously in increasing memory locations, essentially in a single list. If we consider the memory as a row of bytes, with the lowest address on the left and the highest address on the right, a simple array will be stored in memory with the first element at the left end and the last element at the right end. Similarly, a two-dimensional array is stored “row-wise, starting from the first row and ending with the last row, treating each row like a simple array. This is illustrated below.

|     |   | Column |    |    | 3 × 3 array |
|-----|---|--------|----|----|-------------|
|     |   | 0      | 1  | 2  |             |
| row | 0 | 10     | 20 | 30 |             |
|     | 1 | 40     | 50 | 60 |             |
|     | 2 | 70     | 80 | 90 |             |

| row 0  |        |        | row 1  |        |        | row 2  |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 10     | 20     | 30     | 40     | 50     | 60     | 70     | 80     | 90     |
| [0][0] | [0][1] | [0][2] | [1][0] | [1][1] | [1][2] | [2][0] | [2][1] | [2][2] |
| 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |

### Memory Layout

For a multi-dimensional array, the order of storage is that the first element stored has 0 in all its subscripts, the second has all of its subscripts 0 except the far right which has a value of 1 and so on.

The elements of a 2 x 3 x 3 array will be stored as under

| 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| 000 | 001 | 002 | 010 | 011 | 012 | 020 | 021 | 022 | .. |

| 10  | 11  | 12  | 13  | 14  | 15  | 16  | 17  | 18  |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| 100 | 101 | 102 | 110 | 111 | 112 | 120 | 121 | 122 | .. |

The far right subscript increments first and the other subscripts increment in order from right to left. The sequence numbers 1, 2, ....., 18 represents the location of that element in the list

## 3.7 MULTI-DIMENSIONAL ARRAYS

C allows arrays of three or more dimensions. The exact limit is determined by the compiler. The general form of a multi-dimensional array is

```
type array_name[s1][s2][s3]....[sm];
```

where  $s_i$  is the size of the  $i$ th dimension. Some examples are:

```
int survey[3][5][12];
float table[5][4][5][3];
```

**survey** is a three-dimensional array declared to contain 180 integer type elements. Similarly **table** is a four-dimensional array containing 300 elements of floating-point type.

The array **survey** may represent a survey data of rainfall during the last three years from January to December in five cities.

If the first index denotes year, the second city and the third month, then the element **survey[2][3][10]** denotes the rainfall in the month of October during the second year in city-3.

### 3.22 Computer Programming

Remember that a three-dimensional array can be represented as a series of two-dimensional arrays as shown below:

|        | <i>month city</i> | <i>1</i> | <i>2</i> | <i>.....</i> | <i>12</i> |
|--------|-------------------|----------|----------|--------------|-----------|
| Year 1 | 1                 |          |          |              |           |
|        | .                 |          |          |              |           |
|        | .                 |          |          |              |           |
|        | .                 |          |          |              |           |
|        | 5                 |          |          |              |           |
|        |                   |          |          |              |           |
|        | <i>month city</i> | <i>1</i> | <i>2</i> | <i>.....</i> | <i>12</i> |
| Year 2 | 1                 |          |          |              |           |
|        | .                 |          |          |              |           |
|        | .                 |          |          |              |           |
|        | .                 |          |          |              |           |
|        | 5                 |          |          |              |           |
|        |                   |          |          |              |           |

ANSI C does not specify any limit for array dimension. However, most compilers permit seven to ten dimensions. Some allow even more.

## 3.8 DYNAMIC ARRAYS

So far, we created arrays at compile time. An array created at compile time by specifying size in the source code has a fixed size and cannot be modified at run time. The process of allocating memory at compile time is known as *static memory allocation* and the arrays that receive static memory allocation are called *static arrays*. This approach works fine as long as we know exactly what our data requirements are.

Consider a situation where we want to use an array that can vary greatly in size. We must guess what will be the largest size ever needed and create the array accordingly. A difficult task in fact! Modern languages like C do not have this limitation. In C it is possible to allocate memory to arrays at run time. This feature is known as *dynamic memory allocation* and the arrays created at run time are called *dynamic arrays*. This effectively postpones the array definition to run time.

Dynamic arrays are created using what are known as *pointer variables* and *memory management functions* **malloc**, **calloc** and **realloc**. These functions are included in the header file **<stdlib.h>**. The concept of dynamic arrays is used in creating and manipulating data structures such as linked lists, stacks and queues.

## 3.9 MORE ABOUT ARRAYS

What we have discussed in this chapter are the basic concepts of arrays and their applications to a limited extent. There are some more important aspects of application of arrays. They include:

- using pointers for accessing arrays;
- passing arrays as function parameters;
- arrays as members of structures;
- using structure type data as array elements;
- arrays as dynamic data structures; and



- manipulating character arrays and strings.

These aspects of arrays are covered later in the following chapters:

|           |   |            |
|-----------|---|------------|
| Chapter 3 | : | Strings    |
| Chapter 5 | : | Functions  |
| Chapter 7 | : | Structures |
| Chapter 6 | : | Pointers   |

## Just Remember

---

- We need to specify three things, namely, name, type and size, when we declare an array.
- Always remember that subscripts begin at 0 (not 1) and end at size -1.
- Defining the size of an array as a symbolic constant makes a program more scalable.
- Be aware of the difference between the “kth element” and the “element k”. The kth element has a subscript k-1, whereas the element k has a subscript of k itself.
- Do not forget to initialize the elements; otherwise they will contain “garbage”.
- Supplying more initializers in the initializer list is a compile time error.
- Use of invalid subscript is one of the common errors. An incorrect or invalid index may cause unexpected results.
- When using expressions for subscripts, make sure that their results do not go outside the permissible range of 0 to size -1. Referring to an element outside the array bounds is an error.
- When using control structures for looping through an array, use proper relational expressions to eliminate “off-by-one” errors. For example, for an array of size 5, the following **for** statements are wrong:
 

```
for (i = 1; i < =5; i+ +)
for (i = 0; i < =5; i+ +)
```
- Referring a two-dimensional array element like x[i, j] instead of x[i][j] is a compile time error.
- When initializing character arrays, provide enough space for the terminating null character.
- Make sure that the subscript variables have been properly initialized before they are used.
- Leaving out the subscript reference operator [ ] in an assignment operation is a compile time error.
- During initialization of multi-dimensional arrays, it is an error to omit the array size for any dimension other than the first.
- An array is just like any other variable with the key exception that it stores multiple values of the same type.
- A loop construct is most commonly used for initializing an array when the input is to be provided by the end user.
- Use multiple arrays for realizing a matrix in a program.

---

## Multiple Choice Questions

---

1. Array is an example of which of the following?
  - (a) Derived types
  - (b) Fundamental types
  - (c) User-defined types
  - (d) None of the above
2. Which of the following is not a data structure?
  - (a) Linked list
  - (b) Stack
  - (c) Tree
  - (d) Pointer
3. `int a[n]` will reserve how many locations in the memory?

### 3.24 Computer Programming

- (a) n                                      (b) n-1
  - (c) n+1                                    (d) None of the above
4. Which of the following is the correct syntax for initialisation of one-dimensional arrays?
- (a) num[3]= {0 0 0 };
  - (b) num[3]= {0, 0, 0 };
  - (c) num[3]= {0; 0 ;0 };
  - (d) num[3]= 0
5. Which of the following is the correct syntax for initialisation of two-dimensional arrays?
- (a) table[2][3]={0,0,0,1,1,1}
  - (b) table[2][3]={  
                          {0,0,0}  
                          {1,1,1}  
                          }  
(c) table[2][3]={0,1}, {0,1},{0,1}
  - (d) None of the above
6. Which of the following multi-dimensional array declaration is correct for realising a  $2 \times 3$  matrix?
- (a) int m[2][3];                      (b) int m[3][2];
  - (c) int m[3], m[2];                  (d) None of the above
7. Which of the following is not the name of a sorting technique?
- (a) Bubble                              (b) Selection
  - (c) Binary                                (d) Insertion
8. Which of the following is not the name of a searching technique?
- (a) Selection
  - (b) Sequential
  - (c) Binary
  - (d) All of the above are searching techniques
9. In a character string, the last element stores which of the following values?
- (a) Last element of the string
  - (b) Blank space
  - (c) Null character
  - (d) Newline character
10. Which of the following is the correct expression for retrieving the last-row-last-column value of a  $5 \times 4$  array matrix A?
- (a) A[4,5]                              (b) A[5,4]
  - (c) A[5]-> A[4]                      (d) A[4]-> A[5]

---

## Case Study

---

### 1. Median of a List of Numbers

When all the items in a list are arranged in an order, the middle value which divides the items into two parts with equal number of items on either side is called the *median*. Odd number of items have just one middle value while even number of items have two middle values. The median for even number of items is therefore designated as the average of the two middle values.

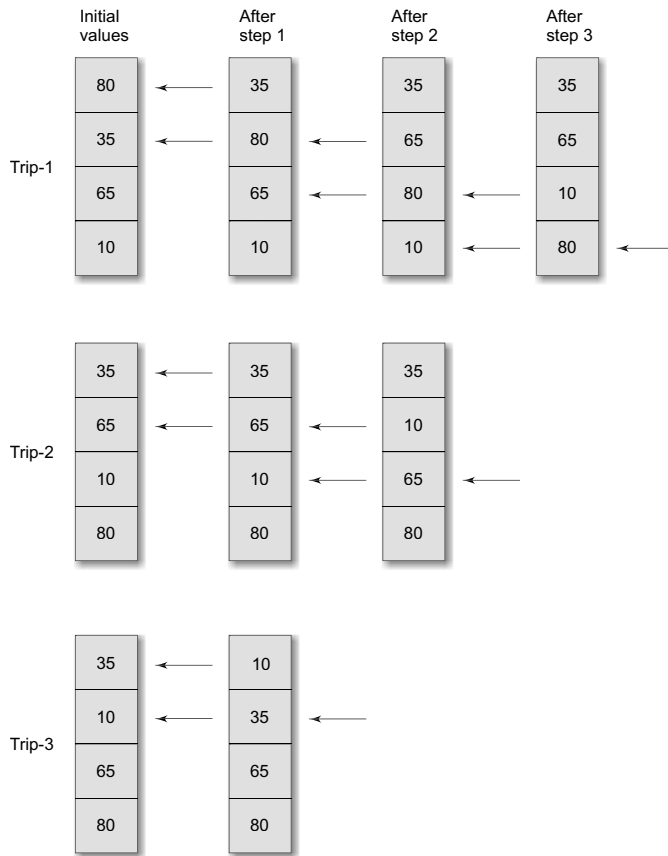
The major steps for finding the median are as follows:

1. Read the items into an array while keeping a count of the items.
2. Sort the items in increasing order.
3. Compute median.

The program and sample output are shown in Fig. 3.11. The sorting algorithm used is as follows:

1. Compare the first two elements in the list, say a[1], and a[2]. If a[2] is smaller than a[1], then interchange their values.
2. Compare a[2] and a[3]; interchange them if a[3] is smaller than a[2].
3. Continue this process till the last two elements are compared and interchanged.
4. Repeat the above steps n-1 times.

In repeated trips through the array, the smallest elements 'bubble up' to the top. Because of this bubbling up effect, this algorithm is called *bubble sorting*. The bubbling effect is illustrated below for four items.



During the first trip, three pairs of items are compared and interchanged whenever needed. It should be noted that the number 80, the largest among the items, has been moved to the bottom at the end of the first trip. This means that the element 80 (the last item in the new list) need not be considered any further. Therefore, trip-2 requires only two pairs to be compared. This time, the number 65 (the second largest value) has been moved down the list. Notice that each trip brings the smallest value 10 up by one level.

The number of steps required in a trip is reduced by one for each trip made. The entire process will be over when a trip contains only one step. If the list contains  $n$  elements, then the number of comparisons involved would be  $n(n-1)/2$ .

#### Program

```
#define N 10
main()
{
 int i,j,n;
 float median,a[N],t;
 printf("Enter the number of items\n");
```

(Contd.)

### 3.26 Computer Programming

```
scanf("%d", &n);
/* Reading items into array a */
printf("Input %d values \n",n);
for (i = 1; i <= n ; i++)
 scanf("%f", &a[i]);
/* Sorting begins */
for (i = 1 ; i <= n-1 ; i++)
{
 /* Trip-i begins */
 for (j = 1 ; j <= n-i ; j++)
 {
 if (a[j] > a[j+1])
 { /* Interchanging values */
 t = a[j];
 a[j] = a[j+1];
 a[j+1] = t;
 }
 else
 continue ;
 }
} /* sorting ends */
/* calculation of median */
if (n % 2 == 0)
 median = (a[n/2] + a[n/2+1])/2.0 ;
else
 median = a[n/2 + 1];
/* Printing */
for (i = 1 ; i <= n ; i++)
 printf("%f ", a[i]);
printf("\n\nMedian is %f\n", median);
}
```

#### Output

```
Enter the number of items
5
Input 5 values
1.111 2.222 3.333 4.444 5.555
5.555000 4.444000 3.333000 2.222000 1.111000

Median is 3.333000

Enter the number of items
6
Input 6 values
3 5 8 9 4 6
9.000000 8.000000 6.000000 5.000000 4.000000 3.000000

Median is 5.500000
```

**Fig. 3.11** Program to sort a list of numbers and to determine median

## 2. Calculation of Standard Deviation

In statistics, standard deviation is used to measure deviation of data from its mean. The formula for calculating standard deviation of **n** items is

$$s = \sqrt{\text{variance}}$$

where

$$\text{variance} = \frac{1}{n} \sum_{i=1}^n (x_i - m)^2$$

and

$$m = \text{mean} = \frac{1}{n} \sum_{i=1}^n x_i$$

The algorithm for calculating the standard deviation is as follows:

1. Read **n** items.
2. Calculate sum and mean of the items.
3. Calculate variance.
4. Calculate standard deviation.

Complete program with sample output is shown in Fig. 3.12.

### Program

```
#include <math.h>
#define MAXSIZE 100
main()
{
 int i,n;
 float value [MAXSIZE], deviation,
 sum,sumsq,mean,variance,stddeviation;
 sum = sumsq = n = 0 ;
 printf("Input values: input -1 to end \n");
 for (i=1; i< MAXSIZE ; i++)
 {
 scanf("%f", &value[i]);
 if (value[i] == -1)
 break;
 sum += value[i];
 n += 1;
 }
 mean = sum/(float)n;
 for (i = 1 ; i<= n; i++)
 {
 deviation = value[i] - mean;
 sumsq += deviation * deviation;
 }
 variance = sumsq/(float)n ;
 stddeviation = sqrt(variance) ;
 printf("\nNumber of items : %d\n",n);
 printf("Mean : %f\n", mean);
 printf("Standard deviation : %f\n", stddeviation);
}
```

(Contd.)

### 3.28 Computer Programming

#### Output

```
Input values: input -1 to end
65 9 27 78 12 20 33 49 -1

Number of items : 8

Mean : 36.625000
Standard deviation : 23.510303
```

Fig. 3.12 Program to calculate standard deviation

### 3. Evaluating a Test

A test consisting of 25 multiple-choice items is administered to a batch of 3 students. Correct answers and student responses are tabulated as shown below:

|                 | Items |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Correct answers | 1     | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 |
| Student 1       |       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| Student 2       |       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| Student 3       |       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

The algorithm for evaluating the answers of students is as follows:

1. Read correct answers into an array.
2. Read the responses of a student and count the correct ones.
3. Repeat step-2 for each student.
4. Print the results.

A program to implement this algorithm is given in Fig. 3.13. The program uses the following arrays:

key[i]        - To store correct answers of items  
response[i]   - To store responses of students  
correct[i]    - To identify items that are answered correctly.

#### Program

```
#define STUDENTS 3
#define ITEMS 25
main()
{
 char key[ITEMS+1], response[ITEMS+1];
 int count, i, student, n,
 correct[ITEMS+1];
 /* Reading of Correct answers */
 printf("Input key to the items\n");
 for(i=0; i < ITEMS; i++)
 scanf("%c", &key[i]);
```

(Contd.)

```

scanf("%c",&key[i]);
key[i] = '\0';
/* Evaluation begins */
for(student = 1; student <= STUDENTS ; student++)
{
/*Reading student responses and counting correct ones*/
count = 0;
printf("\n");
printf("Input responses of student-%d\n",student);
for(i=0; i < ITEMS ; i++)
 scanf("%c",&response[i]);
scanf("%c",&response[i]);
response[i] = '\0';
for(i=0; i < ITEMS; i++)
 correct[i] = 0;
for(i=0; i < ITEMS ; i++)
 if(response[i] == key[i])
 {
 count = count + 1 ;
 correct[i] = 1 ;
 }
/* printing of results */
printf("\n");
printf("Student-%d\n", student);
printf("Score is %d out of %d\n",count, ITEMS);
printf("Response to the items below are wrong\n");
n = 0;
for(i=0; i < ITEMS ; i++)
 if(correct[i] == 0)
 {
 printf("%d ",i+1);
 n = n+1;
 }
 if(n == 0)
 printf("NIL\n");
 printf("\n");
} /* Go to next student */
/* Evaluation and printing ends */
}

```

### Output

```

Input key to the items
abcdabcdabcdabcdabcdabcd

Input responses of student-1
abcdabcdabcdabcdabcdabcd

Student-1
Score is 25 out of 25

```

(Contd.)

### 3.30 Computer Programming

```
Response to the following items are wrong
NIL

Input responses of student-2
abccddcbaabcbcdabcccccccccc

Student-2
Score is 14 out of 25
Response to the following items are wrong
5 6 7 8 17 18 19 21 22 23 25

Input responses of student-3
aaaaaaaaaaaaaaaaaaaaaaaaaaaa

Student-3
Score is 7 out of 25
Response to the following items are wrong
2 3 4 6 7 8 10 11 12 14 15 16 18 19 20 22 23 24
```

**Fig. 3.13** Program to evaluate responses to a multiple-choice test

## 4. Production and Sales Analysis

A company manufactures five categories of products and the number of items manufactured and sold are recorded product-wise every week in a month. The company reviews its production schedule at every month-end. The review may require one or more of the following information:

- (a) Value of weekly production and sales.
- (b) Total value of all the products manufactured.
- (c) Total value of all the products sold.
- (d) Total value of each product, manufactured and sold.

Let us represent the products manufactured and sold by two two-dimensional arrays M and S respectively. Then,

|     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|
| M = | M11 | M12 | M13 | M14 | M15 |
|     | M21 | M22 | M23 | M24 | M25 |
|     | M31 | M32 | M33 | M34 | M35 |
|     | M41 | M42 | M43 | M44 | M45 |
| S = | S11 | S12 | S13 | S14 | S15 |
|     | S21 | S22 | S23 | S24 | S25 |
|     | S31 | S32 | S33 | S34 | S35 |
|     | S41 | S42 | S43 | S44 | S45 |

where  $M_{ij}$  represents the number of  $j$ th type product manufactured in  $i$ th week and  $S_{ij}$  the number of  $j$ th product sold in  $i$ th week. We may also represent the cost of each product by a single dimensional array C as follows:

C = 

|    |    |    |    |    |
|----|----|----|----|----|
| C1 | C2 | C3 | C4 | C5 |
|----|----|----|----|----|



where  $C_j$  is the cost of  $j$ th type product.

We shall represent the value of products manufactured and sold by two value arrays, namely, **Mvalue** and **Svalue**. Then,

$$Mvalue[i][j] = M_{ij} \times C_j$$

$$Svalue[i][j] = S_{ij} \times C_j$$

A program to generate the required outputs for the review meeting is shown in Fig. 3.14. The following additional variables are used:

**Mweek[i]** = Value of all the products manufactured in week  $i$

$$= \sum_{j=1}^5 Mvalue[i][j]$$

**Sweek[i]** = Value of all the products in week  $i$

$$= \sum_{j=1}^5 Svalue[i][j]$$

**Mproduct[j]** = Value of  $j$ th type product manufactured during the month

$$= \sum_{i=1}^4 Mvalue[i][j]$$

**Sproduct[j]** = Value of  $j$ th type product sold during the month

$$= \sum_{i=1}^4 Svalue[i][j]$$

**Mtotal** = Total value of all the products manufactured during the month

$$= \sum_{i=1}^4 Mweek[i] = \sum_{j=1}^5 Mproduct[j]$$

**Stotal** = Total value of all the products sold during the month

$$= \sum_{i=1}^4 Sweek[i] = \sum_{j=1}^5 Sproduct[j]$$

#### Program

```
main()
{
 int M[5][6], S[5][6], C[6],
 Mvalue[5][6], Svalue[5][6],
 Mweek[5], Sweek[5],
 Mproduct[6], Sproduct[6],
 Mtotal, Stotal, i, j, number;
 /* Input data */
 printf (" Enter products manufactured week_wise \n");
 printf (" M11,M12,—, M21,M22,— etc\n");
```

(Contd.)

### 3.32 Computer Programming

```
 for(i=1; i<=4; i++)
 for(j=1;j<=5; j++)
 scanf("%d",&M[i][j]);
 printf (" Enter products sold week_wise\n");
 printf (" S11,S12,—, S21,S22,— etc\n");
 for(i=1; i<=4; i++)
 for(j=1; j<=5; j++)
 scanf("%d", &S[i][j]);
 printf(" Enter cost of each product\n");
 for(j=1; j <=5; j++)
 scanf("%d",&C[j]);
/* Value matrices of production and sales */
 for(i=1; i<=4; i++)
 for(j=1; j<=5; j++)
 {
 Mvalue[i][j] = M[i][j] * C[j];
 Svalue[i][j] = S[i][j] * C[j];
 }
/* Total value of weekly production and sales */
 for(i=1; i<=4; i++)
 {
 Mweek[i] = 0 ;
 Sweek[i] = 0 ;
 for(j=1; j<=5; j++)
 {
 Mweek[i] += Mvalue[i][j];
 Sweek[i] += Svalue[i][j];
 }
 }
/* Monthly value of product_wise production and sales */
 for(j=1; j<=5; j++)
 {
 Mproduct[j] = 0 ;
 Sprduct[j] = 0 ;
 for(i=1; i<=4; i++)
 {
 Mproduct[j] += Mvalue[i][j];
 Sprduct[j] += Svalue[i][j];
 }
 }
/* Grand total of production and sales values */
 Mttotal = Stotal = 0;
 for(i=1; i<=4; i++)
 {
 Mttotal += Mweek[i];
 Stotal += Sweek[i];
 }
```

(Contd.)

```

/*****
 Selection and printing of information required
 *****/
printf("\n\n");
printf(" Following is the list of things you can\n");
printf(" request for. Enter appropriate item number\n");
printf(" and press RETURN Key\n\n");
printf(" 1.Value matrices of production & sales\n");
printf(" 2.Total value of weekly production & sales\n");
printf(" 3.Product wise monthly value of production &");
printf(" sales\n");
printf(" 4.Grand total value of production & sales\n");
printf(" 5.Exit\n");
number = 0;
while(1)
{
 /* Beginning of while loop */
 printf("\n\n ENTER YOUR CHOICE:");
 scanf("%d",&number);
 printf("\n");
 if(number == 5)
 {
 printf(" G O O D B Y E\n\n");
 break;
 }
 switch(number)
 { /* Beginning of switch */
/* VALUE MATRICES */
 case 1:
 printf(" VALUE MATRIX OF PRODUCTION\n\n");
 for(i=1; i<=4; i++)
 {
 printf(" Week(%d)\t",i);
 for(j=1; j <=5; j++)
 printf("%7d", Mvalue[i][j]);
 printf("\n");
 }
 printf("\n VALUE MATRIX OF SALES\n\n");
 for(i=1; i <=4; i++)
 {
 printf(" Week(%d)\t",i);
 for(j=1; j <=5; j++)
 printf("%7d", Svalue[i][j]);
 printf("\n");
 }
 break;
/* WEEKLY ANALYSIS */
 case 2:
 printf(" TOTAL WEEKLY PRODUCTION & SALES\n\n");
 printf("
 PRODUCTION SALES\n");

```

(Contd.)

### 3.34 Computer Programming

```
 printf(" _____ \n");
 for(i=1; i <=4; i++)
 {
 printf(" Week(%d)\t", i);
 printf("%7d\t%7d\n", Mweek[i], Sweek[i]);
 }
 break;
/* PRODUCT WISE ANALYSIS */
case 3:
 printf(" PRODUCT_WISE TOTAL PRODUCTION &");
 printf(" SALES\n\n");
 printf(" PRODUCTION SALES\n");
 printf(" _____ \n");
 for(j=1; j <=5; j++)
 {
 printf(" Product(%d)\t", j);
 printf("%7d\t%7d\n", Mproduct[j], Sproduct[j]);
 }
 break;
/* GRAND TOTALS */
case 4:
 printf(" GRAND TOTAL OF PRODUCTION & SALES\n");
 printf("\n Total production = %d\n", Mtotal);
 printf(" Total sales = %d\n", Stotal);
 break;
/* D E F A U L T */
default :
 printf(" Wrong choice, select again\n\n");
 break;
} /* End of switch */
} /* End of while loop */
printf(" Exit from the program\n\n");
} /* End of main */
```

#### Output

```
Enter products manufactured week_wise
M11, M12, _____, M21, M22, _____ etc
11 15 12 14 13
13 13 14 15 12
12 16 10 15 14
14 11 15 13 12

Enter products sold week_wise
S11,S12,_____, S21,S22,_____ etc
10 13 9 12 11
12 10 12 14 10
11 14 10 14 12
12 10 13 11 10
```

(Contd.)

```

Enter cost of each product
10 20 30 15 25

Following is the list of things you can
request for. Enter appropriate item number
and press RETURN key
1.Value matrices of production & sales
2.Total value of weekly production & sales
3.Product_wise monthly value of production & sales
4.Grand total value of production & sales
5.Exit
ENTER YOUR CHOICE:1
VALUE MATRIX OF PRODUCTION
 Week(1) 110 300 360 210 325
 Week(2) 130 260 420 225 300
 Week(3) 120 320 300 225 350
 Week(4) 140 220 450 185 300
VALUE MATRIX OF SALES
 Week(1) 100 260 270 180 275
 Week(2) 120 200 360 210 250
 Week(3) 110 280 300 210 300
 Week(4) 120 200 390 165 250
ENTER YOUR CHOICE:2
TOTAL WEEKLY PRODUCTION & SALES
 PRODUCTION SALES

 Week(1) 1305 1085
 Week(2) 1335 1140
 Week(3) 1315 1200
 Week(4) 1305 1125
ENTER YOUR CHOICE:3
PRODUCT_WISE TOTAL PRODUCTION & SALES
 PRODUCTION SALES

 Product(1) 500 450
 Product(2) 1100 940
 Product(3) 1530 1320
 Product(4) 855 765
 Product(5) 1275 1075
ENTER YOUR CHOICE:4

GRAND TOTAL OF PRODUCTION & SALES
Total production = 5260
Total sales = 4550
ENTER YOUR CHOICE:5
GOOD BYE
Exit from the program

```

Fig. 3.14 Program for production and sales analysis

## Review Questions

- 3.1 State whether the following statements are *true* or *false*.
- The type of all elements in an array must be the same.
  - When an array is declared, C automatically initializes its elements to zero.
  - An expression that evaluates to an integral value may be used as a subscript.
  - Accessing an array outside its range is a compile time error.
  - A **char** type variable cannot be used as a subscript in an array.
  - An unsigned long int type can be used as a subscript in an array.
  - In C, by default, the first subscript is zero.
  - When initializing a multidimensional array, not specifying all its dimensions is an error.
  - When we use expressions as a subscript, its result should be always greater than zero.
  - In C, we can use a maximum of 4 dimensions for an array.
  - In declaring an array, the array size can be a constant or variable or an expression.
  - The declaration `int x[2] = {1,2,3};` is illegal.
- 3.2 Fill in the blanks in the following statements.
- The variable used as a subscript in an array is popularly known as \_\_\_\_\_ variable.
  - An array can be initialized either at compile time or at \_\_\_\_\_.
  - An array created using **malloc** function at run time is referred to as \_\_\_\_\_ array.
  - An array that uses more than two subscript is referred to as \_\_\_\_\_ array.
  - \_\_\_\_\_ is the process of arranging the elements of an array in order.
- 3.3 Identify errors, if any, in each of the following array declaration statements, assuming that ROW and COLUMN are declared as symbolic constants:
- `int score (100);`
  - `float values [10,15];`
  - `float average[ROW],[COLUMN];`
  - `char name[15];`
  - `int sum[ ];`
  - `double salary [i + ROW]`
  - `long int number [ROW]`
  - `int array x[COLUMN];`
- 3.4 Identify errors, if any, in each of the following initialization statements.
- `int number[ ] = {0,0,0,0};`
  - `float item[3][2] = {0,1,2,3,4,5};`
  - `char word[ ] = {'A', 'R', 'R', 'A', 'Y'};`
  - `int m[2,4] = {(0,0,0,0)(1,1,1,1)};`
  - `float result[10] = 0;`
- 3.5 Assume that the arrays A and B are declared as follows:
- ```
int A[5][4];
float B[4];
```
- Find the errors (if any) in the following program segments.
- ```
for (i=1; i<=5; i++)
 for(j=1; j<=4; j++)
 A[i][j] = 0;
```
  - ```
for (i=1; i<4; i++)
    scanf("%f", B[i]);
```
 - ```
for (i=0; i<=4; i++)
 B[i] = B[i]+i;
```
  - ```
for (i=4; i>=0; i--)
    for (j=0; j<4; j++)
        A[i][j] = B[j] + 1.0;
```
- 3.6 Write a **for** loop statement that initializes all the diagonal elements of an array to one and others to zero as shown below. Assume 5 rows and 5 columns.
- | | | | | | | |
|---|---|---|---|---|-------|---|
| 1 | 0 | 0 | 0 | 0 | | 0 |
| 0 | 1 | 0 | 0 | 0 | | 0 |
| 0 | 0 | 1 | 0 | 0 | | 0 |
| . | . | . | . | . | | . |
| . | . | . | . | . | | . |
| . | . | . | . | . | | . |
| . | . | . | . | . | | . |
| . | . | . | . | . | | . |
| 0 | 0 | 0 | 0 | 0 | | 1 |

- 3.7 We want to declare a two-dimensional integer type array called **matrix** for 3 rows and 5 columns. Which of the following declarations are correct?
- int maxtrix [3],[5];
 - int matrix [5] [3];
 - int matrix [1+2] [2+3];
 - int matrix [3,5];
 - int matrix [3] [5];
- 3.8 Which of the following initialization statements are correct?
- char str1[4] = "GOOD";
 - char str2[] = "C";
 - char str3[5] = "Moon";
 - char str4[] = {'S', 'U', 'N'};
 - char str5[10] = "Sun";
- 3.9 What is a data structure? Why is an array called a data structure?
- 3.10 What is a dynamic array? How is it created? Give a typical example of use of a dynamic array.
- 3.11 What is the error in the following program?
- ```
main ()
{
 int x ;
 float y [] ;

}
```
- 3.12 What happens when an array with a specified size is assigned
- with values fewer than the specified size; and
  - with values more than the specified size.
- 3.13 Discuss how initial values can be assigned to a multidimensional array.
- 3.14 What is the output of the following program?
- ```
main ( )
{
    int m [ ] = { 1,2,3,4,5 }
    int x, y = 0;
    for (x = 0; x < 5; x++ )
        y = y + m [ x ];
    printf("%d", y) ;
}
```
- 3.15 What is the output of the following program?
- ```
main ()
{
 char string [] = "HELLO WORLD" ;
 int m;
 for (m = 0; string [m] != '\0'; m++)
 if ((m%2) == 0)
 printf("%c", string [m]);
}
```

## Programming Exercises

- 3.1 Write a program for fitting a straight line through a set of points  $(x_i, y_i)$ ,  $i = 1, \dots, n$ . The straight line equation is
- $$y = mx + c$$
- and the values of  $m$  and  $c$  are given by
- $$m = \frac{n \sum (x_i y_i) - (\sum x_i)(\sum y_i)}{n(\sum x_i^2) - (\sum x_i)^2}$$
- $$c = \frac{1}{n}(\sum y_i - m \cdot \sum x_i)$$
- All summations are from 1 to  $n$ .
- 3.2 The daily maximum temperatures recorded in 10 cities during the month of January (for all 31 days) have been tabulated as follows:

| City | 1 | 2 | 3     | ----- | 10 |
|------|---|---|-------|-------|----|
| day  |   |   |       |       |    |
| 1    |   |   | ----- |       |    |
| 2    |   |   |       |       |    |
| 3    |   |   |       |       |    |
| -    |   |   |       |       |    |
| -    |   |   |       |       |    |
| -    |   |   |       |       |    |
| -    |   |   |       |       |    |
| 31   |   |   |       |       |    |

### 3.38 Computer Programming

Write a program to read the table elements into a two-dimensional array **temperature**, and to find the city and day corresponding to  
(a) the highest temperature and  
(b) the lowest temperature.

- 3.3 An election is contested by 5 candidates. The candidates are numbered 1 to 5 and the voting is done by marking the candidate number on the ballot paper. Write a program to read the ballots and count the votes cast for each candidate using an array variable **count**. In case, a number read is outside the range 1 to 5, the ballot should be considered as a 'spoilt ballot' and the program should also count the number of spoilt ballots.

- 3.4 The following set of numbers is popularly known as Pascal's triangle.

```

1
1 1
1 2 1
1 3 3 1
1 4 6 4 1
1 5 10 10 5 1
- - - - - -
- - - - - -

```

If we denote rows by  $i$  and columns by  $j$ , then any element (except the boundary elements) in the triangle is given by

$$p_{ij} = p_{i-1, j-1} + p_{i-1, j}$$

Write a program to calculate the elements of the Pascal triangle for 10 rows and print the results.

- 3.5 The annual examination results of 100 students are tabulated as follows:

| Roll No. | Subject 1 | Subject 2 | Subject 3 |
|----------|-----------|-----------|-----------|
| .        |           |           |           |
| .        |           |           |           |
| .        |           |           |           |

Write a program to read the data and determine the following:

- Total marks obtained by each student.
- The highest marks in each subject and the Roll No. of the student who secured it.
- The student who obtained the highest total marks.

- 3.6 Given are two one-dimensional arrays **A** and **B** which are sorted in ascending order. Write a program to **merge** them into a single sorted array **C** that contains every item from arrays **A** and **B**, in ascending order.
- 3.7 Two matrices that have the same number of rows and columns can be multiplied to produce a third matrix. Consider the following two matrices.

$$A = \begin{bmatrix} a_{11} & a_{12} & \cdots & a_{1n} \\ a_{21} & a_{22} & \cdots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1} & \cdots & \cdots & a_{nn} \end{bmatrix}$$

$$B = \begin{bmatrix} b_{11} & b_{12} & \cdots & b_{1n} \\ b_{21} & b_{22} & \cdots & b_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ b_{n1} & \cdots & \cdots & b_{nn} \end{bmatrix}$$

The product of **A** and **B** is a third matrix **C** of size  $n \times n$  where each element of **C** is given by the following equation.

$$C_{ij} = a_{ik} \cdot b_{kj}$$

Write a program that will read the values of elements of **A** and **B** and produce the product matrix **C**.

- 3.8 Write a program that fills a five-by-five matrix as follows:
- Upper left triangle with +1s
  - Lower right triangle with -1s
  - Right to left diagonal with zeros

Display the contents of the matrix using not more than two **printf** statements

- 3.9 Selection sort is based on the following idea: Selecting the largest array element and swapping it with the last array element leaves an unsorted list whose size is 1 less than the size of the original list. If we repeat this step again on the unsorted list we will have an ordered list of size 2 and an unordered list



size  $n-2$ . When we repeat this until the size of the unsorted list becomes one, the result will be a sorted list.

Write a program to implement this algorithm.

- 3.10 Develop a program to implement the binary search algorithm. This technique compares the search key value with the value of the element that is midway in a “sorted” list. Then;
- If they match, the search is over.
  - If the search key value is less than the middle value, then the first half of the list contains the key value.
  - If the search key value is greater than the middle value, then the second half contains the key value.
- Repeat this “divide-and-conquer” strategy until we have a match. If the list is reduced to one non-matching element, then the list does not contain the key value.
- Use the sorted list created in Exercise 3.9 or use any other sorted list.
- 3.11 Write a program that will compute the length of a given character string.

- 3.12 Write a program that will count the number occurrences of a specified character in a given line of text. Test your program.
- 3.13 Write a program to read a matrix of size  $m \times n$  and print its transpose.
- 3.14 Every book published by international publishers should carry an International Standard Book Number (ISBN). It is a 10 character 4 part number as shown below.

0-07-041183-2

The first part denotes the region, the second represents publisher, the third identifies the book and the fourth is the check digit. The check digit is computed as follows:

Sum =  $(1 \times \text{first digit}) + (2 \times \text{second digit}) + (3 \times \text{third digit}) + \dots + (9 \times \text{ninth digit})$ .

Check digit is the remainder when sum is divided by 11. Write a program that reads a given ISBN number and checks whether it represents a valid ISBN.

- 3.15 Write a program to read two matrices A and B and print the following:
- $A + B$ ; and
  - $A - B$ .

---

## Key Terms

---

- **Array:** It is a fixed-size sequenced collection of elements of the same data type.
  - **Structured data types:** These data types provide an organizational scheme that shows the relationships among the individual elements and facilitate efficient data manipulations.
  - **One-dimensional array:** In this array, a list of items is given one variable name using only one subscript.
  - **Sorting:** It is the process of arranging elements in the list according to their values, in ascending or descending order.
  - **Searching:** It is the process of finding the location of the specified element in a list.
  - **Two-dimensional array:** It is used to store a table of values with two dimensions.
  - **Multi-dimensional array:** It is used to store data with three or more dimensions.
  - **Static memory allocation:** It is the process of allocating memory at compile time.
  - **Static arrays:** These are the arrays, which receive static memory allocation.
  - **Dynamic memory allocation:** It is the process of allocating memory at run time.
  - **Dynamic arrays:** These are the arrays created at run time.
-



# UNIT 4

## Strings and Iteration

### 4.1 INTRODUCTION

A string is a sequence of characters that is treated as a single data item. We have used strings in a number of examples in the past. Any group of characters (except double quote sign) defined between double quotation marks is a string constant. Example:

“Man is obviously made to think.”

If we want to include a double quote in the string to be printed, then we may use it with a back slash as shown below.

“\” Man is obviously made to think,\” said Pascal.”

For example,

```
printf ("\ Well Done !\");
```

will output the string

“ Well Done !”

while the statement

```
printf(" Well Done !");
```

will output the string

Well Done !

Character strings are often used to build meaningful and readable programs. The common operations performed on character strings include:

- Reading and writing strings.
- Combining strings together.
- Copying one string to another.
- Comparing strings for equality.
- Extracting a portion of a string.

In this chapter, we shall discuss these operations in detail and examine library functions that implement them.

### 4.2 DECLARING AND INITIALIZING STRING VARIABLES

C does not support strings as a data type. However, it allows us to represent strings as character arrays. In C, therefore, a string variable is any valid C variable name and is always declared as an array of characters. The general form of declaration of a string variable is:

```
char string_name[size];
```

## 4.2 Computer Programming

The *size* determines the number of characters in the string *name*. Some examples are:

```
char city[10];
char name[30];
```

When the compiler assigns a character string to a character array, it automatically supplies a *null* character (`'\0'`) at the end of the string. Therefore, the *size* should be equal to the maximum number of characters in the string *plus* one.

Like numeric arrays, character arrays may be initialized when they are declared. C permits a character array to be initialized in either of the following two forms:

```
char city [9] = " NEW YORK ";
char city [9]={ 'N','E','W',' ','Y','O','R','K','\0'};
```

The reason that **city** had to be 9 elements long is that the string NEW YORK contains 8 characters and one element space is provided for the null terminator. Note that when we initialize a character array by listing its elements, we must supply explicitly the null terminator.

C also permits us to initialize a character array without specifying the number of elements. In such cases, the size of the array will be determined automatically, based on the number of elements initialized. For example, the statement

```
char string [] = {'G','O','O','D','\0'};
```

defines the array **string** as a five element array.

We can also declare the size much larger than the string size in the initializer. That is, the statement.

```
char str[10] = "GOOD";
```

is permitted. In this case, the computer creates a character array of size 10, places the value “GOOD” in it, terminates with the null character, and initializes all other elements to NULL. The storage will look like:

|   |   |   |   |    |    |    |    |    |    |
|---|---|---|---|----|----|----|----|----|----|
| G | O | O | D | \0 | \0 | \0 | \0 | \0 | \0 |
|---|---|---|---|----|----|----|----|----|----|

However, the following declaration is illegal.

```
char str2[3] = "GOOD";
```

This will result in a compile time error. Also note that we cannot separate the initialization from declaration. That is,

```
char str3[5];
str3 = "GOOD";
```

is not allowed. Similarly,

```
char s1[4] = "abc";
char s2[4];
s2 = s1; /* Error */
```

is not allowed. An array name cannot be used as the left operand of an assignment operator.

### Terminating Null Character

You must be wondering, “why do we need a terminating null character?” As we know, a string is not a data type in C, but it is considered a data structure stored in an array. The string is a variable-length structure and is stored in a fixed-length array. The array size is not always the size of the string and most often it is much larger than the string stored in it. Therefore, the last element of the array need not represent the end of the string. We need some way to determine the end of the string data and the null character serves as the “end-of-string” marker.

## 4.3 READING STRINGS FROM TERMINAL

### 4.3.1 Using `scanf` Function

The familiar input function **`scanf`** can be used with `%s` format specification to read in a string of characters. Example:

```
char address[10]
scanf("%s", address);
```

The problem with the **`scanf`** function is that it terminates its input on the first white space it finds. A white space includes blanks, tabs, carriage returns, form feeds, and new lines. Therefore, if the following line of text is typed in at the terminal,

NEW YORK

then only the string “NEW” will be read into the array **`address`**, since the blank space after the word ‘NEW’ will terminate the reading of string.

The **`scanf`** function automatically terminates the string that is read with a null character and therefore the character array should be large enough to hold the input string plus the null character. Note that unlike previous **`scanf`** calls, in the case of character arrays, the ampersand (&) is not required before the variable name.

The **`address`** array is created in the memory as shown below:

|   |   |   |    |   |   |   |   |   |   |
|---|---|---|----|---|---|---|---|---|---|
| N | E | W | \0 | ? | ? | ? | ? | ? | ? |
| 0 | 1 | 2 | 3  | 4 | 5 | 6 | 7 | 8 | 9 |

Note that the unused locations are filled with garbage.

If we want to read the entire line “NEW YORK”, then we may use two character arrays of appropriate sizes. That is,

```
char adr1[5], adr2[5];
scanf("%s %s", adr1, adr2);
```

with the line of text

NEW YORK

will assign the string “NEW” to **`adr1`** and “YORK” to **`adr2`**.

**EXAMPLE 4.1** Write a program to read a series of words from a terminal using `scanf` function.

The program shown in Fig. 4.1 reads four words and displays them on the screen. Note that the string ‘Oxford Road’ is treated as *two words* while the string ‘Oxford-Road’ as *one word*.

**Program**

```
main()
{
 char word1[40], word2[40], word3[40], word4[40];
 printf("Enter text : \n");
 scanf("%s %s", word1, word2);
 scanf("%s", word3);
 scanf("%s", word4);
```

(Contd.)

## 4.4 Computer Programming

```
 printf("\n");
 printf("word1 = %s\nword2 = %s\n", word1, word2);
 printf("word3 = %s\nword4 = %s\n", word3, word4);
 }
```

### Output

```
Enter text :
Oxford Road, London M17ED
word1 = Oxford
word2 = Road,
word3 = London
word4 = M17ED

Enter text :
Oxford-Road, London-M17ED United Kingdom
word1 = Oxford-Road
word2 = London-M17ED
word3 = United
word4 = Kingdom
```

Fig. 4.1 Reading a series of words using **scanf** function

We can also specify the field width using the form **%ws** in the **scanf** statement for reading a specified number of characters from the input string. Example:

```
scanf("%ws", name);
```

Here, two things may happen.

1. The width **w** is equal to or greater than the number of characters typed in. The entire string will be stored in the string variable.
2. The width **w** is less than the number of characters in the string. The excess characters will be truncated and left unread.

Consider the following statements:

```
char name[10];
scanf("%5s", name);
```

The input string RAM will be stored as:

|   |   |   |    |   |   |   |   |   |   |
|---|---|---|----|---|---|---|---|---|---|
| R | A | M | \0 | ? | ? | ? | ? | ? | ? |
| 0 | 1 | 2 | 3  | 4 | 5 | 6 | 7 | 8 | 9 |

The input string KRISHNA will be stored as:

|   |   |   |   |   |    |   |   |   |   |
|---|---|---|---|---|----|---|---|---|---|
| K | R | I | S | H | \0 | ? | ? | ? | ? |
| 0 | 1 | 2 | 3 | 4 | 5  | 6 | 7 | 8 | 9 |

### 4.3.2 Reading a Line of Text

We have seen just now that **scanf** with **%s** or **%ws** can read only strings without whitespaces. That is, they cannot be used for reading a text containing more than one word. However, C supports a format specification known as the *edit set conversion code* **%[. .]** that can be used to read a line containing a variety of characters,

including whitespaces. Recall that we have used this conversion code in Chapter 5. For example, the program segment

```
char line [80];
scanf("%[^\n]", line);
printf("%s", line);
```

will read a line of input from the keyboard and display the same on the screen. We would very rarely use this method, as C supports an intrinsic string function to do this job. This is discussed in the next section.

### 4.3.3 Using *getchar* and *gets* Functions

We have discussed in Chapter 5 as to how to read a single character from the terminal, using the function **getchar**. We can use this function repeatedly to read successive single characters from the input and place them into a character array. Thus, an entire line of text can be read and stored in an array. The reading is terminated when the newline character ('`\n`') is entered and the null character is then inserted at the end of the string. The **getchar** function call takes the form:

```
char ch;
ch = getchar();
```

Note that the **getchar** function has no parameters.

**EXAMPLE 4.2** Write a program to read a line of text containing a series of words from the terminal.

The program shown in Fig. 4.2 can read a line of text (up to a maximum of 80 characters) into the string `line` using `getchar` function. Every time a character is read, it is assigned to its location in the string `line` and then tested for *newline* character. When the *newline* character is read (signalling the end of line), the reading loop is terminated and the *newline* character is replaced by the null character to indicate the end of character string.

When the loop is exited, the value of the index `c` is one number higher than the last character position in the string (since it has been incremented after assigning the new character to the string). Therefore the index value `c-1` gives the position where the *null* character is to be stored.

#### Program

```
#include <stdio.h>
main()
{
 char line[81], character;
 int c;
 c = 0;
 printf("Enter text. Press <Return> at end\n");
 do
 {
 character = getchar();
 line[c] = character;
 c++;
 }
 while(character != '\n');
 c = c - 1;
```

(Contd.)

## 4.6 Computer Programming

```
 line[c] = '\0';
 printf("\n%s\n", line);
 }
}
```

### Output

```
Enter text. Press <Return> at end
Programming in C is interesting.
Programming in C is interesting.
Enter text. Press <Return> at end
National Centre for Expert Systems, Hyderabad.
National Centre for Expert Systems, Hyderabad.
```

**Fig. 4.2** Program to **read a line of text** from terminal

Another and more convenient method of reading a string of text containing whitespaces is to use the library function **gets** available in the `<stdio.h>` header file. This is a simple function with one string parameter and called as under:

```
gets (str);
```

**str** is a string variable declared properly. It reads characters into **str** from the keyboard until a new-line character is encountered and then appends a null character to the string. Unlike **scanf**, it does not skip whitespaces. For example the code segment

```
char line [80];
gets (line);
printf ("%s", line);
```

reads a line of text from the keyboard and displays it on the screen. The last two statements may be combined as follows:

```
printf("%s", gets(line));
```

*(Be careful not to input more character that can be stored in the string variable used. Since C does not check array-bounds, it may cause problems.)*

C does not provide operators that work on strings directly. For instance we cannot assign one string to another directly. For example, the assignment statements.

```
string = "ABC";
string1 = string2;
```

are not valid. If we really want to copy the characters in **string2** into **string1**, we may do so on a character-by-character basis.

**EXAMPLE 4.3** Write a program to copy one string into another and count the number of characters copied.

The program is shown in Fig. 4.3. We use a **for** loop to copy the characters contained inside **string2** into the **string1**. The loop is terminated when the *null* character is reached. Note that we are again assigning a null character to the **string1**.

### Program

```
main()
{
 char string1[80], string2[80];
 int i;
```

(Contd.)



```

 printf("Enter a string \n");
 printf("?");
 scanf("%s", string2);
 for(i=0 ; string2[i] != '\0'; i++)
 string1[i] = string2[i];
 string1[i] = '\0';
 printf("\n");
 printf("%s\n", string1);
 printf("Number of characters = %d\n", i);
}

```

**Output**

```

Enter a string
?Manchester
Manchester
Number of characters = 10

Enter a string
?Westminster
Westminster
Number of characters = 11

```

**Fig. 4.3** Copying one string into another

## 4.4 WRITING STRINGS TO SCREEN

### 4.4.1 Using *printf* Function

We have used extensively the **printf** function with %s format to print strings to the screen. The format %s can be used to display an array of characters that is terminated by the null character. For example, the statement

```
printf("%s", name);
```

can be used to display the entire contents of the array **name**.

We can also specify the precision with which the array is displayed. For instance, the specification

```
%10.4
```

indicates that the *first four* characters are to be printed in a field width of 10 columns.

However, if we include the minus sign in the specification (e.g., %-10.4s), the string will be printed left-justified. The Example 4.4 illustrates the effect of various %s specifications.

|                    |                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>EXAMPLE 4.4</b> | Write a program to store the string “United Kingdom” in the array country and display the string under various format specifications. |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------|

The program and its output are shown in Fig. 4.4. The output illustrates the following features of the %s specifications.

1. When the field width is less than the length of the string, the entire string is printed.
2. The integer value on the right side of the decimal point specifies the number of characters to be printed.
3. When the number of characters to be printed is specified as zero, nothing is printed.
4. The minus sign in the specification causes the string to be printed left-justified.
5. The specification %.ns prints the first n characters of the string.

## 4.8 Computer Programming

### Program

```
main()
{
 char country[15] = "United Kingdom";
 printf("\n\n");
 printf("*123456789012345*\n");
 printf("----- \n");
 printf("%15s\n", country);
 printf("%5s\n", country);
 printf("%15.6s\n", country);
 printf("%-15.6s\n", country);
 printf("%15.0s\n", country);
 printf("%.3s\n", country);
 printf("%s\n", country);
 printf("----- \n");
}
```

### Output

```
123456789012345

United Kingdom
United Kingdom
 United
United
Uni
United Kingdom

```

Fig. 4.4 Writing strings using %s format

The **printf** on UNIX supports another nice feature that allows for variable field width or precision. For instance

```
printf("%*.*s\n", w, d, string);
```

prints the first **d** characters of the string in the field width of **w**.

This feature comes in handy for printing a sequence of characters. Example 4.5 illustrates this.

### EXAMPLE 4.5

Write a program using for loop to print the following output:

```
C
CP
CPr
CPro
....
....
CProgramming
CProgramming
....
....
CPro
CPr
CP
C
```

The outputs of the program in Fig. 4.5, for variable specifications `%12.*s`, `%.*s`, and `%*.1s` are shown in Fig. 4.6, which further illustrates the variable field width and the precision specifications.

```

Program
 main()
 {
 int c, d;
 char string[] = "CProgramming";
 printf("\n\n");
 printf("-----\n");
 for(c = 0 ; c <= 11 ; c++)
 {
 d = c + 1;
 printf("|%-12.*s|\n", d, string);
 }
 printf("|-----|\n");
 for(c = 11 ; c >= 0 ; c--)
 {
 d = c + 1;
 printf("|%-12.*s|\n", d, string);
 }
 printf("-----\n");
 }

```

Output

```

C
CP
CPr
CPro
CProg
CProgr
CProgra
CProgram
CProgramm
CProgrammi
CProgrammin
CProgramming
CProgramming
CProgrammin
CProgrammi
CProgramm
CProgram
CProgra
CProgr
CProg
CPro
CPr
CP
C

```

**Fig. 4.5** Illustration of variable field specifications by printing sequences of characters

#### 4.10 Computer Programming

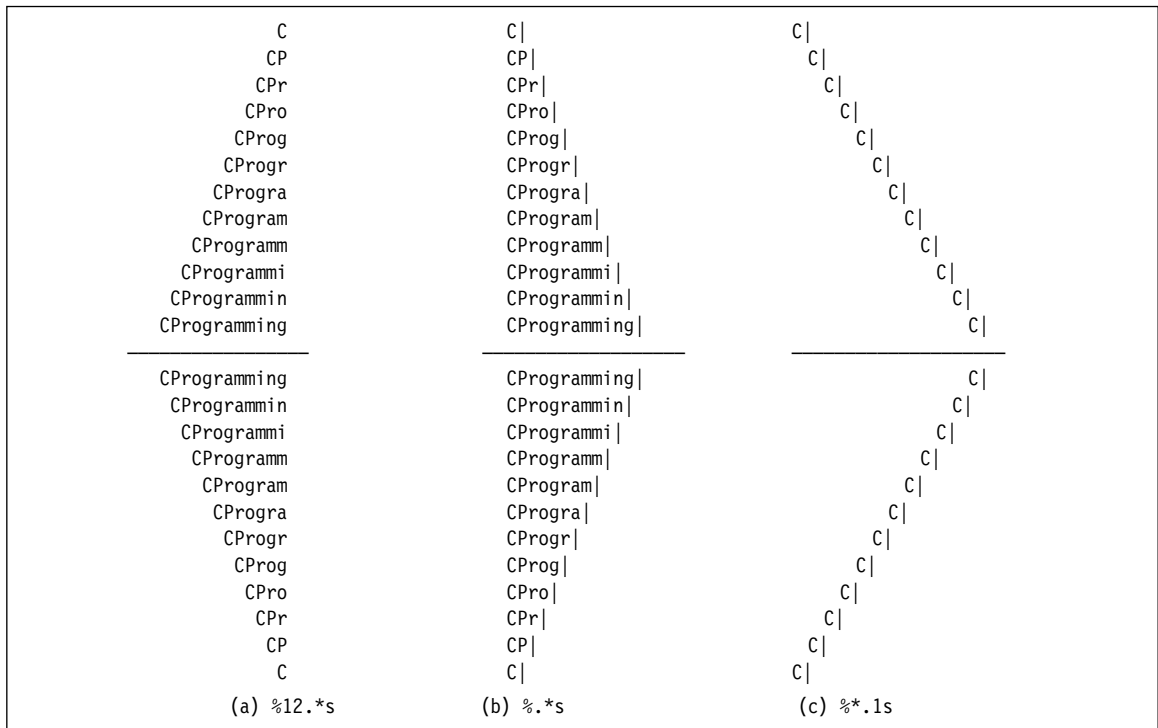


Fig. 4.6 Further illustrations of variable specifications

#### 4.4.2 Using putchar and puts Functions

Like **getchar**, C supports another character handling function **putchar** to output the values of character variables. It takes the following form:

```
char ch = 'A';
putchar (ch);
```

The function **putchar** requires one parameter. This statement is equivalent to:

```
printf("%c", ch);
```

We have used **putchar** function in Chapter 5 to write characters to the screen. We can use this function repeatedly to output a string of characters stored in an array using a loop. Example:

```
char name[6] = "PARIS"
for (i=0, i<5; i++)
 putchar(name[i];
putchar('\n');
```

Another and more convenient way of printing string values is to use the function **puts** declared in the header file `<stdio.h>`. This is a one parameter function and invoked as under:

```
puts (str);
```

where **str** is a string variable containing a string value. This prints the value of the string variable **str** and then moves the cursor to the beginning of the next line on the screen. For example, the program segment

```
char line [80];
gets (line);
puts (line);
```

reads a line of text from the keyboard and displays it on the screen. Note that the syntax is very simple compared to using the **scanf** and **printf** statements.

## 4.5 ARITHMETIC OPERATIONS ON CHARACTERS

C allows us to manipulate characters the same way we do with numbers. Whenever a character constant or character variable is used in an expression, it is automatically converted into an integer value by the system. The integer value depends on the local character set of the system.

To write a character in its integer representation, we may write it as an integer. For example, if the machine uses the ASCII representation, then,

```
x = 'a';
printf("%d\n",x);
```

will display the number 97 on the screen.

It is also possible to perform arithmetic operations on the character constants and variables. For example,

```
x = 'z'-1;
```

is a valid statement. In ASCII, the value of 'z' is 122 and therefore, the statement will assign the value 121 to the variable **x**.

We may also use character constants in relational expressions. For example, the expression

```
ch >= 'A' && ch <= 'Z'
```

would test whether the character contained in the variable **ch** is an upper-case letter.

We can convert a character digit to its equivalent integer value using the following relationship:

```
x = character - '0';
```

where **x** is defined as an integer variable and **character** contains the character digit. For example, let us assume that the **character** contains the digit '7',

Then,

$$\begin{aligned}x &= \text{ASCII value of '7'} - \text{ASCII value of '0'} \\ &= 55 - 48 \\ &= 7\end{aligned}$$

The C library supports a function that converts a string of digits into their integer values. The function takes the form

```
x = atoi(string);
```

**x** is an integer variable and **string** is a character array containing a string of digits. Consider the following segment of a program:

```
number = "1988";
year = atoi(number);
```

**number** is a string variable which is assigned the string constant "1988". The function **atoi** converts the string "1988" (contained in **number**) to its numeric equivalent 1988 and assigns it to the integer variable **year**. String conversion functions are stored in the header file `<std.lib.h>`.

**EXAMPLE 4.6** Write a program which would print the alphabet set a to z and A to Z in decimal and character form.

The program is shown in Fig. 4.7. In ASCII character set, the decimal numbers 65 to 90 represent upper case alphabets and 97 to 122 represent lower case alphabets. The values from 91 to 96 are excluded using an **if** statement in the **for** loop.

## 4.12 Computer Programming

### Program

```
main()
{
 char c;
 printf("\n\n");
 for(c = 65 ; c <= 122 ; c = c + 1)
 {
 if(c > 90 && c < 97)
 continue;
 printf("|%4d - %c ", c, c);
 }
 printf("\n\n");
}
```

### Output

```
| 65 - A | 66 - B | 67 - C | 68 - D | 69 - E | 70 - F
| 71 - G | 72 - H | 73 - I | 74 - J | 75 - K | 76 - L
| 77 - M | 78 - N | 79 - O | 80 - P | 81 - Q | 82 - R
| 83 - S | 84 - T | 85 - U | 86 - V | 87 - W | 88 - X
| 89 - Y | 90 - Z | 97 - a | 98 - b | 99 - c | 100 - d
| 101 - e | 102 - f | 103 - g | 104 - h | 105 - i | 106 - j
| 107 - k | 108 - l | 109 - m | 110 - n | 111 - o | 112 - p
| 113 - q | 114 - r | 115 - s | 116 - t | 117 - u | 118 - v
| 119 - w | 120 - x | 121 - y | 122 - z |
```

Fig. 4.7 Printing of the alphabet set in decimal and character form

## 4.6 PUTTING STRINGS TOGETHER

Just as we cannot assign one string to another directly, we cannot join two strings together by the simple arithmetic addition. That is, the statements such as

```
string3 = string1 + string2;
string2 = string1 + "hello";
```

are not valid. The characters from **string1** and **string2** should be copied into the **string3** one after the other. The size of the array **string3** should be large enough to hold the total characters.

The process of combining two strings together is called *concatenation*. Example 4.7 illustrates the concatenation of three strings.

**EXAMPLE 4.7** The names of employees of an organization are stored in three arrays, namely `first_name`, `second_name`, and `last_name`. Write a program to concatenate the three parts into one string to be called `name`.

The program is given in Fig. 4.8. Three **for** loops are used to copy the three strings. In the first loop, the characters contained in the **first\_name** are copied into the variable **name** until the *null* character is reached. The *null* character is not copied; instead it is replaced by a *space* by the assignment statement

```
name[i] = ' ';
```

Similarly, the **second\_name** is copied into **name**, starting from the column just after the space created by the above statement. This is achieved by the assignment statement

```
name[i+j+1] = second_name[j];
```

If **first\_name** contains 4 characters, then the value of **i** at this point will be 4 and therefore the first character from **second\_name** will be placed in the *fifth cell* of **name**. Note that we have stored a space in the *fourth cell*.

In the same way, the statement

```
name[i+j+k+2] = last_name[k];
```

is used to copy the characters from **last\_name** into the proper locations of **name**.

At the end, we place a null character to terminate the concatenated string **name**. In this example, it is important to note the use of the expressions **i+j+1** and **i+j+k+2**.

#### Program

```
main()
{
 int i, j, k ;
 char first_name[10] = {"VISWANATH"} ;
 char second_name[10] = {"PRATAP"} ;
 char last_name[10] = {"SINGH"} ;
 char name[30] ;
 /* Copy first_name into name */
 for(i = 0 ; first_name[i] != '\0' ; i++)
 name[i] = first_name[i] ;
 /* End first_name with a space */
 name[i] = ' ' ;
 /* Copy second_name into name */
 for(j = 0 ; second_name[j] != '\0' ; j++)
 name[i+j+1] = second_name[j] ;
 /* End second_name with a space */
 name[i+j+1] = ' ' ;
 /* Copy last_name into name */
 for(k = 0 ; last_name[k] != '\0' ; k++)
 name[i+j+k+2] = last_name[k] ;
 /* End name with a null character */
 name[i+j+k+2] = '\0' ;
 printf("\n\n") ;
 printf("%s\n", name) ;
}
```

#### Output

```
VISWANATH PRATAP SINGH
```

Fig. 4.8 Concatenation of strings

## 4.7 COMPARISON OF TWO STRINGS

Once again, C does not permit the comparison of two strings directly. That is, the statements such as

```
if(name1 == name2)
if(name == "ABC")
```

are not permitted. It is therefore necessary to compare the two strings to be tested, character by character. The comparison is done until there is a mismatch or one of the strings terminates into a null character, whichever occurs first. The following segment of a program illustrates this.

## 4.14 Computer Programming

```
i=0;
while(str1[i] == str2[i] && str1[i] != '\0'
 && str2[i] != '\0')
 i = i+1;
if (str1[i] == '\0' && str2[i] == '\0')
 printf("strings are equal\n");
else
 printf("strings are not equal\n");
```

## 4.8 STRING-HANDLING FUNCTIONS

Fortunately, the C library supports a large number of string-handling functions that can be used to carry out many of the string manipulations discussed so far. Following are the most commonly used string-handling functions.

| <i>Function</i> | <i>Action</i>                  |
|-----------------|--------------------------------|
| strcat()        | concatenates two strings       |
| strcmp()        | compares two strings           |
| strcpy()        | copies one string over another |
| strlen()        | finds the length of a string   |

We shall discuss briefly how each of these functions can be used in the processing of strings.

### 4.8.1 strcat() Function

The **strcat** function joins two strings together. It takes the following form:

**strcat(string1, string2);**

**string1** and **string2** are character arrays. When the function **strcat** is executed, **string2** is appended to **string1**. It does so by removing the null character at the end of **string1** and placing **string2** from there. The string at **string2** remains unchanged. For example, consider the following three strings:

will result in:

|         |   |   |   |   |   |   |   |   |   |    |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|----|---|---|---|
|         | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9  | 0 | 1 | 2 |
| Part1 = | V | E | R | Y |   | G | O | O | D | \0 |   |   |   |

|         |   |   |   |   |    |   |   |
|---------|---|---|---|---|----|---|---|
|         | 0 | 1 | 2 | 3 | 4  | 5 | 6 |
| Part2 = | G | O | O | D | \0 |   |   |

Execution of the statement

**strcat(part1, part2);**

will result in:

|         |   |   |   |   |   |   |   |   |   |    |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|----|---|---|---|
|         | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9  | 0 | 1 | 2 |
| Part1 = | V | E | R | Y |   | G | O | O | D | \0 |   |   |   |



|         | 0 | 1 | 2 | 3 | 4  | 5 | 6 |
|---------|---|---|---|---|----|---|---|
| Part2 = | G | O | O | D | \0 |   |   |

while the statement  
will result in:

|         | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8  | 9 | 0 | 1 | 2 |
|---------|---|---|---|---|---|---|---|---|----|---|---|---|---|
| Part1 = | V | E | R | Y |   | B | A | D | \0 |   |   |   |   |

|         | 0 | 1 | 2 | 3  | 4 | 5 | 6 |
|---------|---|---|---|----|---|---|---|
| Part3 = | B | A | D | \0 |   |   |   |

We must make sure that the size of **string1** (to which **string2** is appended) is large enough to accommodate the final string.

**strcat** function may also append a string constant to a string variable. The following is valid:

```
strcat(part1, "GOOD");
```

C permits nesting of **strcat** functions. For example, the statement

```
strcat(strcat(string1, string2), string3);
```

is allowed and concatenates all the three strings together. The resultant string is stored in **string1**.

### 4.8.2 strcmp() Function

The **strcmp** function compares two strings identified by the arguments and has a value 0 if they are equal. If they are not, it has the numeric difference between the first nonmatching characters in the strings. It takes the form:

```
strcmp(string1, string2);
```

**string1** and **string2** may be string variables or string constants. Examples are:

```
strcmp(name1, name2);
strcmp(name1, "John");
strcmp("Rom", "Ram");
```

Our major concern is to determine whether the strings are equal; if not, which is alphabetically above. The value of the mismatch is rarely important. For example, the statement

```
strcmp("their", "there");
```

will return a value of  $-9$  which is the numeric difference between ASCII “i” and ASCII “r”. That is, “i” minus “r” in ASCII code is  $-9$ . If the value is negative, **string1** is alphabetically above **string2**.

### 4.8.3 strcpy() Function

The **strcpy** function works almost like a string-assignment operator. It takes the form:

```
strcpy(string1, string2);
```

and assigns the contents of **string2** to **string1**. **string2** may be a character array variable or a string constant. For example, the statement

```
strcpy(city, "DELHI");
```

will assign the string “DELHI” to the string variable **city**. Similarly, the statement

## 4.16 Computer Programming

```
strcpy(city1, city2);
```

will assign the contents of the string variable **city2** to the string variable **city1**. The size of the array **city1** should be large enough to receive the contents of **city2**.

### 4.8.4 strlen() Function

This function counts and returns the number of characters in a string. It takes the form

```
n = strlen(string);
```

Where **n** is an integer variable, which receives the value of the length of the **string**. The argument may be a string constant. The counting ends at the first null character.

**EXAMPLE 4.8** s1, s2, and s3 are three string variables. Write a program to read two string constants into s1 and s2 and compare whether they are equal or not. If they are not, join them together. Then copy the contents of s1 to the variable s3. At the end, the program should print the contents of all the three variables and their lengths.

The program is shown in Fig. 4.9. During the first run, the input strings are “New” and “York”. These strings are compared by the statement

```
x = strcmp(s1, s2);
```

Since they are not equal, they are joined together and copied into **s3** using the statement

```
strcpy(s3, s1);
```

The program outputs all the three strings with their lengths.

During the second run, the two strings **s1** and **s2** are equal, and therefore, they are not joined together. In this case all the three strings contain the same string constant “London”.

#### Program

```
#include <string.h>
main()
{
 char s1[20], s2[20], s3[20];
 int x, l1, l2, l3;
 printf("\n\nEnter two string constants \n");
 printf("?");
 scanf("%s %s", s1, s2);
 /* comparing s1 and s2 */
 x = strcmp(s1, s2);
 if(x != 0)
 {
 printf("\n\nStrings are not equal \n");
 strcat(s1, s2); /* joining s1 and s2 */
 }
 else
 printf("\n\nStrings are equal \n");
 /* copying s1 to s3 */
 strcpy(s3, s1);
 /* Finding length of strings */
 l1 = strlen(s1);
 l2 = strlen(s2);
 l3 = strlen(s3);
```

(Contd.)

```

/* output */
printf("\ns1 = %s\t length = %d characters\n", s1, l1);
printf("s2 = %s\t length = %d characters\n", s2, l2);
printf("s3 = %s\t length = %d characters\n", s3, l3);
}

```

**Output**

```

Enter two string constants
? New York

Strings are not equal
s1 = NewYork length = 7 characters
s2 = York length = 4 characters
s3 = NewYork length = 7 characters

Enter two string constants
? London London

Strings are equal
s1 = London length = 6 characters
s2 = London length = 6 characters
s3 = London length = 6 characters

```

**Fig. 4.9** Illustration of string handling functions**Other String Functions**

The header file `<string.h>` contains many more string manipulation functions. They might be useful in certain situations.

**4.8.5 strncpy() Function**

In addition to the function **strcpy** that copies one string to another, we have another function **strncpy** that copies only the left-most *n* characters of the source string to the target string variable. This is a three-parameter function and is invoked as follows:

```
strncpy(s1, s2, 5);
```

This statement copies the first 5 characters of the source string **s2** into the target string **s1**. Since the first 5 characters may not include the terminating null character, we have to place it explicitly in the 6th position of **s2** as shown below:

```
s1[6] = '\0';
```

Now, the string **s1** contains a proper string.

**4.8.6 strncmp() Function**

A variation of the function **strcmp** is the function **strncmp**. This function has three parameters as illustrated in the function call below:

```
strncmp (s1, s2, n);
```

this compares the left-most *n* characters of **s1** to **s2** and returns.

- (a) 0 if they are equal;
- (b) negative number, if **s1** sub-string is less than **s2**; and
- (c) positive number, otherwise.

## 4.18 Computer Programming

### 4.8.7 strncat() Function

This is another concatenation function that takes three parameters as shown below:

```
strncat (s1, s2, n);
```

This call will concatenate the left-most n characters of **s2** to the end of **s1**. Example:

S1 : 

|   |   |   |   |    |  |  |  |  |  |  |  |
|---|---|---|---|----|--|--|--|--|--|--|--|
| B | A | L | A | \0 |  |  |  |  |  |  |  |
|---|---|---|---|----|--|--|--|--|--|--|--|

S2 : 

|   |   |   |   |   |   |   |   |    |
|---|---|---|---|---|---|---|---|----|
| G | U | R | U | S | A | M | Y | \0 |
|---|---|---|---|---|---|---|---|----|

After **strncat** (s1, s2, 4); execution:

S1 : 

|   |   |   |   |   |   |   |   |    |
|---|---|---|---|---|---|---|---|----|
| B | A | L | A | G | U | R | U | \0 |
|---|---|---|---|---|---|---|---|----|

### 4.8.8 strstr() Function

It is a two-parameter function that can be used to locate a sub-string in a string. This takes the forms:

```
strstr (s1, s2);
strstr (s1, "ABC");
```

The function **strstr** searches the string **s1** to see whether the string **s2** is contained in **s1**. If yes, the function returns the position of the first occurrence of the sub-string. Otherwise, it returns a NULL pointer. Example.

```
if (strstr (s1, s2) == NULL)
 printf("substring is not found");
else
 printf("s2 is a substring of s1");
```

We also have functions to determine the existence of a character in a string. The function call

```
strchr(s1, 'm');
```

will locate the first occurrence of the character 'm' and the call

```
strrchr(s1, 'm');
```

will locate the last occurrence of the character 'm' in the string **s1**.

#### Warnings

- When allocating space for a string during declaration, remember to count the terminating null character.
- When creating an array to hold a copy of a string variable of unknown size, we can compute the size required using the expression **strlen** (stringname) +1.
- When copying or concatenating one string to another, we must ensure that the target (destination) string has enough space to hold the incoming characters. Remember that no error message will be available even if this condition is not satisfied. The copying may overwrite the memory and the program may fail in an unpredictable way.
- When we use **strncpy** to copy a specific number of characters from a source string, we must ensure to append the null character to the target string, in case the number of characters is less than or equal to the source string.

## 4.9 TABLE OF STRINGS

We often use lists of character strings, such as a list of the names of students in a class, list of the names of employees in an organization, list of places, etc. A list of names can be treated as a table of strings and a two-dimensional character array can be used to store the entire list. For example, a character array **student[30][15]** may be used to store a list of 30 names, each of length not more than 15 characters. Shown below is a table of five cities:

|   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|
| C | h | a | n | d | i | g | a | r | h |
| M | a | d | r | a | s |   |   |   |   |
| A | h | m | e | d | a | b | a | d |   |
| H | y | d | e | r | a | b | a | d |   |
| B | o | m | b | a | y |   |   |   |   |

This table can be conveniently stored in a character array **city** by using the following declaration:

```
char city[] []
{
 "Chandigarh",
 "Madras",
 "Ahmedabad",
 "Hyderabad",
 "Bombay"
} ;
```

To access the name of the *i*th city in the list, we write

**city[i-1]**

and therefore **city[0]** denotes “Chandigarh”, **city[1]** denotes “Madras” and so on. This shows that once an array is declared as two-dimensional, it can be used like a one-dimensional array in further manipulations. That is, the table can be treated as a column of strings.

**EXAMPLE 4.9** Write a program that would sort a list of names in alphabetical order.

A program to sort the list of strings in alphabetical order is given in Fig. 4.10. It employs the method of bubble sorting described in Case Study 1 in the previous chapter.

### Program

```
#define ITEMS 5
#define MAXCHAR 20
main()
{
 char string[ITEMS][MAXCHAR], dummy[MAXCHAR];
 int i = 0, j = 0;
 /* Reading the list */
 printf ("Enter names of %d items \n ",ITEMS);
```

(Contd.)

```

 while (i < ITEMS)
 scanf ("%s", string[i++]);
 /* Sorting begins */
 for (i=1; i < ITEMS; i++) /* Outer loop begins */
 {
 for (j=1; j <= ITEMS-i ; j++) /*Inner loop begins*/
 {
 if (strcmp (string[j-1], string[j]) > 0)
 { /* Exchange of contents */
 strcpy (dummy, string[j-1]);
 strcpy (string[j-1], string[j]);
 strcpy (string[j], dummy);
 }
 } /* Inner loop ends */
 } /* Outer loop ends */
 /* Sorting completed */
 printf ("\nAlphabetical list \n\n");
 for (i=0; i < ITEMS ; i++)
 printf ("%s", string[i]);
}

```

**Output**

```

Enter names of 5 items
London Manchester Delhi Paris Moscow
Alphabetical list
Delhi
London
Manchester
Moscow
Paris

```

**Fig. 4.10** *Sorting of strings in alphabetical order*

Note that a two-dimensional array is used to store the list of strings. Each string is read using a **scanf** function with **%s** format. Remember, if any string contains a white space, then the part of the string after the white space will be treated as another item in the list by the **scanf**. In such cases, we should read the entire line as a string using a suitable algorithm. For example, we can use **gets** function to read a line of text containing a series of words. We may also use **puts** function in place of **scanf** for output.

## 4.10 OTHER FEATURES OF STRINGS

Other aspects of strings we have not discussed in this chapter include:

- Manipulating strings using pointers.
- Using string as function parameters.
- Declaring and defining strings as members of structures.

These topics will be dealt with later when we discuss functions, structures and pointers.

## 4.11 DECISION MAKING AND LOOPING

We have seen in the previous chapter that it is possible to execute a segment of a program repeatedly by introducing a counter and later testing it using the **if** statement. While this method is quite satisfactory for all

practical purposes, we need to initialize and increment a counter and test its value at an appropriate place in the program for the completion of the loop. For example, suppose we want to calculate the sum of squares of all integers between 1 and 10, we can write a program using the **if** statement as follows:

```


sum = 0;
n = 1;
loop:
sum = sum + n*n;
if (n == 10)
 goto print;
else
{
 n = n + 1;
 goto loop;
}
print:


```

L  
o  
o  
p

n = 10,  
end of loop

This program does the following things:


1. Initializes the variable **n**.
2. Computes the square of **n** and adds it to **sum**.
3. Tests the value of **n** to see whether it is equal to 10 or not. If it is equal to 10, then the program prints the results.
4. If **n** is less than 10, then it is incremented by one and the control goes back to compute the **sum** again.

The program evaluates the statement

**sum = sum + n\*n;**

10 times. That is, the loop is executed 10 times. This number can be increased or decreased easily by modifying the relational expression appropriately in the statement **if** (**n** == 10). On such occasions where the exact number of repetitions are known, there are more convenient methods of looping in C. These looping capabilities enable us to develop concise programs containing repetitive processes without the use of **goto** statements.

In looping, a sequence of statements are executed until some conditions for termination of the loop are satisfied. A *program loop* therefore consists of two segments, one known as the *body of the loop* and the other known as the *control statement*. The control statement tests certain conditions and then directs the repeated execution of the statements contained in the body of the loop.

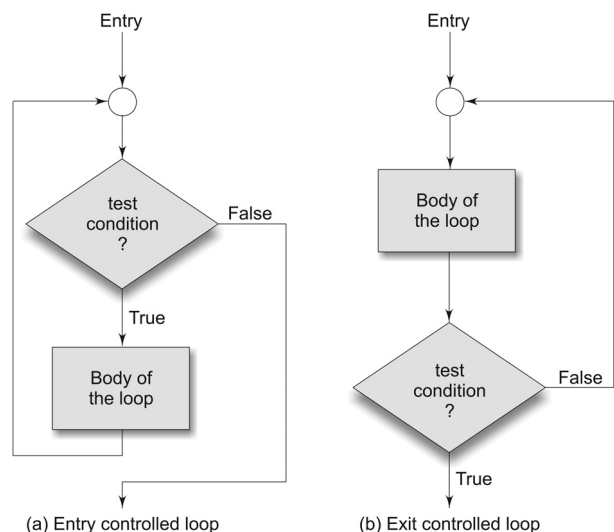

**Fig. 4.11** Loop control structures

## 4.22 Computer Programming

Depending on the position of the control statement in the loop, a control structure may be classified either as the *entry-controlled loop* or as the *exit-controlled loop*. The flow charts in Fig. 4.11 illustrate these structures. In the entry-controlled loop, the control conditions are tested before the start of the loop execution. If the conditions are not satisfied, then the body of the loop will not be executed. In the case of an exit-controlled loop, the test is performed at the end of the body of the loop and therefore the body is executed unconditionally for the first time. The entry-controlled and exit-controlled loops are also known as *pre-test* and *post-test* loops respectively.

The test conditions should be carefully stated in order to perform the desired number of loop executions. It is assumed that the test condition will eventually transfer the control out of the loop. In case, due to some reason it does not do so, the control sets up an *infinite loop* and the body is executed over and over again.

A looping process, in general, would include the following four steps:

1. Setting and initialization of a condition variable.
2. Execution of the statements in the loop.
3. Test for a specified value of the condition variable for execution of the loop.
4. Incrementing or updating the condition variable.

The test may be either to determine whether the loop has been repeated the specified number of times or to determine whether a particular condition has been met.

The C language provides for three *constructs* for performing *loop* operations. They are:

1. The **while** statement.
2. The **do** statement.
3. The **for** statement.

We shall discuss the features and applications of each of these statements in this chapter.

### Sentinel Loops

Based on the nature of control variable and the kind of value assigned to it for testing the control expression, the loops may be classified into two general categories:

1. Counter-controlled loops
2. Sentinel-controlled loops

When we know in advance exactly how many times the loop will be executed, we use a *counter-controlled loop*. We use a control variable known as *counter*. The counter must be initialized, tested and updated properly for the desired loop operations. The number of times we want to execute the loop may be a constant or a variable that is assigned a value. A counter-controlled loop is sometimes called *definite repetition loop*.

In a *sentinel-controlled loop*, a special value called a *sentinel* value is used to change the loop control expression from true to false. For example, when reading data we may indicate the "end of data" by a special value, like -1 and 999. The control variable is called **sentinel** variable. A sentinel-controlled loop is often called *indefinite repetition loop* because the number of repetitions is not known before the loop begins executing.

## 4.12 THE WHILE STATEMENT

The simplest of all the looping structures in C is the **while** statement. We have used **while** in many of our earlier programs. The basic format of the **while** statement is

```
while (test condition)
{
 body of the loop
}
```

The **while** is an *entry-controlled* loop statement. The *test-condition* is evaluated and if the condition is *true*, then the body of the loop is executed. After execution of the body, the test-condition is once again



evaluated and if it is true, the body is executed once again. This process of repeated execution of the body continues until the test-condition finally becomes *false* and the control is transferred out of the loop. On exit, the program continues with the statement immediately after the body of the loop.

The body of the loop may have one or more statements. The braces are needed only if the body contains two or more statements. However, it is a good practice to use braces even if the body has only one statement.

We can rewrite the program loop discussed in Section 9.1 as follows:

```

=====
sum = 0;
n = 1; /* Initialization */
loop → while(n <= 10) /* Testing */
 {
 sum = sum + n * n;
 n = n+1; /* Incrementing */
 }
printf("sum = %d\n", sum);
=====

```

The body of the loop is executed 10 times for  $n = 1, 2, \dots, 10$ , each time adding the square of the value of  $n$ , which is incremented inside the loop. The test condition may also be written as  $n < 11$ ; the result would be the same. This is a typical example of counter-controlled loops. The variable  $n$  is called **counter** or **control variable**.

Another example of **while** statement, which uses the keyboard input is shown below:

```

=====
character = ' ' ;
while (character != 'Y')
 character = getchar();
xxxxxxx;
=====

```

First the **character** is initialized to ' '. The **while** statement then begins by testing whether **character** is not equal to Y. Since the **character** was initialized to ' ', the test is true and the loop statement

**character = getchar();**

is executed. Each time a letter is keyed in, the test is carried out and the loop statement is executed until the letter Y is pressed. When Y is pressed, the condition becomes false because **character** equals Y, and the loop terminates, thus transferring the control to the statement `xxxxxxx;`. This is a typical example of sentinel-controlled loops. The character constant 'y' is called *sentinel* value and the variable **character** is the condition variable, which often referred to as the *sentinel variable*.

**EXAMPLE 4.10** A program to evaluate the equation  
 $y = x^n$   
 when  $n$  is a non-negative integer, is given in Fig. 4.12.

The variable  $y$  is initialized to 1 and then multiplied by  $x$ ,  $n$  times using the **while** loop. The loop control variable **count** is initialized outside the loop and incremented inside the loop. When the value of **count** becomes greater than  $n$ , the control exits the loop.

## 4.24 Computer Programming

### Program

```
main()
{
 int count, n;
 float x, y;
 printf("Enter the values of x and n : ");
 scanf("%f %d", &x, &n);
 y = 1.0;
 count = 1; /* Initialisation */
 /* LOOP BEGINS */
 while (count <= n) /* Testing */
 {
 y = y*x;
 count++; /* Incrementing */
 }
 /* END OF LOOP */
 printf("\nx = %f; n = %d; x to power n = %f\n",x,n,y);
}
```

### Output

```
Enter the values of x and n : 2.5 4
x = 2.500000; n = 4; x to power n = 39.062500
Enter the values of x and n : 0.5 4
x = 0.500000; n = 4; x to power n = 0.062500
```

Fig. 4.12 Program to compute  $x$  to the power  $n$  using **while** loop

## 4.13 THE DO STATEMENT

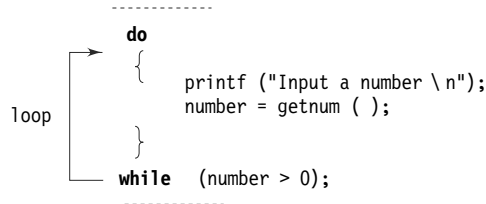
The **while** loop construct that we have discussed in the previous section, makes a test of condition *before* the loop is executed. Therefore, the body of the loop may not be executed at all if the condition is not satisfied at the very first attempt. On some occasions it might be necessary to execute the body of the loop before the test is performed. Such situations can be handled with the help of the **do** statement. This takes the form:

```
do
{
 body of the loop
}
while (test-condition);
```

On reaching the **do** statement, the program proceeds to evaluate the body of the loop first. At the end of the loop, the *test-condition* in the **while** statement is evaluated. If the condition is true, the program continues to evaluate the body of the *loop* once again. This process continues as long as the *condition* is true. When the condition becomes false, the loop will be terminated and the control goes to the statement that appears immediately after the **while** statement.

Since the *test-condition* is evaluated at the bottom of the loop, the **do...while** construct provides an *exit-controlled* loop and therefore the body of the loop is *always executed at least once*.

A simple example of a **do...while**



This segment of a program reads a number from the keyboard until a zero or a negative number is keyed in, and assigned to the *sentinel* variable **number**.

The test conditions may have compound relations as well. For instance, the statement

```
while (number > 0 && number < 100);
```

in the above example would cause the loop to be executed as long as the number keyed in lies between 0 and 100.

Consider another example:

```

I = 1; /* Initializing */
sum = 0;
do
{
 sum = sum + I;
loop I = I+2; /* Incrementing */
}
while(sum < 40 || I < 10); /* Testing */
printf("%d %d\n", I, sum);

```

The loop will be executed as long as one of the two relations is true.

**EXAMPLE 4.11** A program to print the multiplication table from 1 x 1 to 12 x 10 is given in Fig. 4.13.

This program contains two **do.... while** loops in nested form. The outer loop is controlled by the variable **row** and executed 12 times. The inner loop is controlled by the variable **column** and is executed 10 times, each time the outer loop is executed. That is, the inner loop is executed a total of 120 times, each time printing a value in the table.

**Program:**

```

#define COLMAX 10
#define ROWMAX 12
main()
{
 int row,column, y;
 row = 1;
 printf(" MULTIPLICATION TABLE \n");
 printf("-----\n");
 do /*.....OUTER LOOP BEGINS.....*/
 {
 column = 1;

```

(Contd.)

```

do /*.....INNER LOOP BEGINS.....*/
{
 y = row * column;
 printf("%4d", y);
 column = column + 1;
}
while (column <= COLMAX); /*... INNER LOOP ENDS ...*/
printf("\n");
row = row + 1;
}
while (row <= ROWMAX); /*..... OUTER LOOP ENDS*/
printf("-----\n");
}

```

Output

| MULTIPLICATION TABLE |    |    |    |    |    |    |    |     |     |
|----------------------|----|----|----|----|----|----|----|-----|-----|
| 1                    | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9   | 10  |
| 2                    | 4  | 6  | 8  | 10 | 12 | 14 | 16 | 18  | 20  |
| 3                    | 6  | 9  | 12 | 15 | 18 | 21 | 24 | 27  | 30  |
| 4                    | 8  | 12 | 16 | 20 | 24 | 28 | 32 | 36  | 40  |
| 5                    | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45  | 50  |
| 6                    | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54  | 60  |
| 7                    | 14 | 21 | 28 | 35 | 42 | 49 | 56 | 63  | 70  |
| 8                    | 16 | 24 | 32 | 40 | 48 | 56 | 64 | 72  | 80  |
| 9                    | 18 | 27 | 36 | 45 | 54 | 63 | 72 | 81  | 90  |
| 10                   | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90  | 100 |
| 11                   | 22 | 33 | 44 | 55 | 66 | 77 | 88 | 99  | 110 |
| 12                   | 24 | 36 | 48 | 60 | 72 | 84 | 96 | 108 | 120 |

Fig. 4.13 Printing of a multiplication table using **do...while** loop

Notice that the **printf** of the inner loop does not contain any new line character (**\n**). This allows the printing of all row values in one line. The empty **printf** in the outer loop initiates a new line to print the next row.

## 4.14 THE FOR STATEMENT

### 4.14.1 Simple 'for' Loops

The **for** loop is another *entry-controlled* loop that provides a more concise loop control structure. The general form of the **for** loop is

```

for (initialization ; test-condition ; increment)
{
 body of the loop
}

```

The execution of the **for** statement is as follows:

1. *Initialization* of the *control variables* is done first, using assignment statements such as  $i = 1$  and  $\text{count} = 0$ . The variables **i** and **count** are known as loop-control variables.
2. The value of the control variable is tested using the test-condition. The *test-condition* is a relational expression, such as  $i < 10$  that determines when the loop will exit. If the condition is *true*, the body of

the loop is executed; otherwise the loop is terminated and the execution continues with the statement that immediately follows the loop.

3. When the body of the loop is executed, the control is transferred back to the **for** statement after evaluating the last statement in the loop. Now, the control variable is *incremented* using an assignment statement such as `i = i+1` and the new value of the control variable is again tested to see whether it satisfies the loop condition. If the condition is satisfied, the body of the loop is again executed. This process continues till the value of the control variable fails to satisfy the test-condition.



**NOTE:** C99 enhances the **for** loop by allowing declaration of variables in the initialization portion. See the Appendix “C99 Features”.

Consider the following segment of a program:

```

loop for (x = 0 ; x <= 9 ; x = x+1)
 {
 printf("d", x);
 }
 printf("\n");

```

This **for** loop is executed 10 times and prints the digits 0 to 9 in one line. The three sections enclosed within parentheses must be separated by semicolons. Note that there is no semicolon at the end of the *increment* section, `x = x+1`.

The **for** statement allows for *negative increments*. For example, the loop discussed above can be written as follows:

```

for (x = 9 ; x >= 0 ; x = x-1)
 printf("d", x);
printf("\n");

```

This loop is also executed 10 times, but the output would be from 9 to 0 instead of 0 to 9. Note that braces are optional when the body of the loop contains only one statement.

Since the conditional test is always performed at the beginning of the loop, the body of the loop may not be executed at all, if the condition fails at the start. For example,

```

for (x = 9; x < 9; x = x-1)
 printf("d", x);

```

will never be executed because the test condition fails at the very beginning itself.

Let us again consider the problem of sum of squares of integers discussed in Section 4.1. This problem can be coded using the **for** statement as follows:

```

sum = 0;
for (n = 1; n <= 10; n = n+1)
{
 sum = sum+ n*n;
}
printf("sum = %d\n", sum);

```

The body of the loop

```
sum = sum + n*n;
```

is executed 10 times for `n = 1, 2, .....`, 10 each time incrementing the **sum** by the square of the value of `n`.

## 4.28 Computer Programming

One of the important points about the **for** loop is that all the three actions, namely *initialization*, *testing*, and *incrementing*, are placed in the **for** statement itself, thus making them visible to the programmers and users, in one place. The **for** statement and its equivalent of **while** and **do** statements are shown in Table 4.1.

**Table 4.1** Comparison of the Three Loops

| <i>for</i>                   | <i>while</i>         | <i>do</i>             |
|------------------------------|----------------------|-----------------------|
| <b>for</b> (n=1; n<=10; ++n) | n = 1;               | n = 1;                |
| {                            | <b>while</b> (n<=10) | <b>do</b>             |
| _____                        | {                    | {                     |
| _____                        | _____                | _____                 |
| }                            | _____                | _____                 |
|                              | n = n+1;             | n = n+1;              |
|                              | }                    | }                     |
|                              |                      | <b>while</b> (n<=10); |

**EXAMPLE 4.12** The program in Fig. 4.14 uses a for loop to print the “Powers of 2” table for the power

The program evaluates the value

$$p = 2^n$$

successively by multiplying 2 by itself n times.

$$q = 2^{-n} = \frac{1}{p}$$

Note that we have declared **p** as a **long int** and **q** as a **double**.

### 4.14.2 Additional Features of for Loop

The for loop in C has several capabilities that are not found in other loop constructs. For example, more than one variable can be initialized at a time in the **for** statement. The statements

```
p = 1;
for (n=0; n<17; ++n)
```

can be rewritten as

```
for (p=1, n=0; n<17; ++n)
```

#### Program

```
main()
{
 long int p;
 int n;
 double q;
 printf("-----\n");
 printf(" 2 to power n n 2 to power -n\n");
 printf("-----\n");
```

(Contd.)

```

p = 1;
for (n = 0; n < 21 ; ++n) /* LOOP BEGINS */
{
 if (n == 0)
 p = 1;
 else
 p = p * 2;
 q = 1.0/(double)p ;
 printf("%10ld %10d %20.12lf\n", p, n, q);
} /* LOOP ENDS */
printf("-----\n");
}

```

**Output**

| 2 to power n | n  | 2 to power -n  |
|--------------|----|----------------|
| 1            | 0  | 1.000000000000 |
| 2            | 1  | 0.500000000000 |
| 4            | 2  | 0.250000000000 |
| 8            | 3  | 0.125000000000 |
| 16           | 4  | 0.062500000000 |
| 32           | 5  | 0.031250000000 |
| 64           | 6  | 0.015625000000 |
| 128          | 7  | 0.007812500000 |
| 256          | 8  | 0.003906250000 |
| 512          | 9  | 0.001953125000 |
| 1024         | 10 | 0.000976562500 |
| 2048         | 11 | 0.000488281250 |
| 4096         | 12 | 0.000244140625 |
| 8192         | 13 | 0.000122070313 |
| 16384        | 14 | 0.000061035156 |
| 32768        | 15 | 0.000030517578 |
| 65536        | 16 | 0.000015258789 |
| 131072       | 17 | 0.000007629395 |
| 262144       | 18 | 0.000003814697 |
| 524288       | 19 | 0.000001907349 |
| 1048576      | 20 | 0.000000953674 |

**Fig. 4.14** Program to print 'Power of 2' table using for loop

Note that the initialization section has two parts **p = 1** and **n = 1** separated by a *comma*.

Like the initialization section, the increment section may also have more than one part. For example, the loop

```

for (n=1, m=50; n<=m; n=n+1, m=m-1)
{
 p = m/n;
 printf("d d d\n", n, m, p);
}

```

is perfectly valid. The multiple arguments in the increment section are separated by *commas*.

#### 4.30 Computer Programming

The third feature is that the test-condition may have any compound relation and the testing need not be limited only to the loop control variable. Consider the example below:

```
sum = 0;
for (i = 1; i < 20 && sum < 100; ++i)
{
 sum = sum+i;
 printf("d d\n", i, sum);
}
```

The loop uses a compound test condition with the counter variable **i** and sentinel variable **sum**. The loop is executed as long as both the conditions **i < 20** and **sum < 100** are true. The **sum** is evaluated inside the loop.

It is also permissible to use expressions in the assignment statements of initialization and increment sections. For example, a statement of the type

```
for (x = (m+n)/2; x > 0; x = x/2)
```

is perfectly valid.

Another unique aspect of **for** loop is that one or more sections can be omitted, if necessary. Consider the following statements:

```

m = 5;
for (; m != 100 ;)
{
 printf("d\n", m);
 m = m+5;
}

```

Both the initialization and increment sections are omitted in the **for** statement. The initialization has been done before the **for** statement and the control variable is incremented inside the loop. In such cases, the sections are left 'blank'. However, the semicolons separating the sections must remain. If the test-condition is not present, the **for** statement sets up an '*infinite*' loop. Such loops can be broken using **break** or **goto** statements in the loop.

We can set up *time delay loops* using the null statement as follows:

```
for (j = 1000; j > 0; j = j-1)
;
```

This loop is executed 1000 times without producing any output; it simply causes a time delay. Notice that the body of the loop contains only a semicolon, known as a *null statement*. This can also be written as

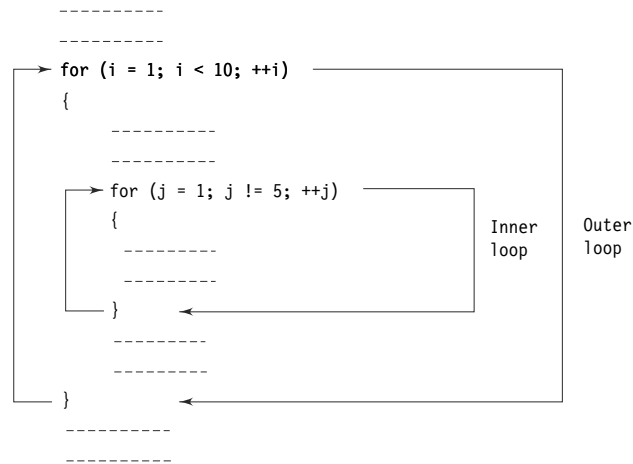
```
for (j=1000; j > 0; j = j-1)
```

This implies that the C compiler will not give an error message if we place a semicolon by mistake at the end of a **for** statement. The semicolon will be considered as a *null statement* and the program may produce some nonsense.

#### 4.14.3 Nesting of for Loops

Nesting of loops, that is, one **for** statement within another **for** statement, is allowed in C. For example, two loops can be nested as follows:





The nesting may continue up to any desired level. The loops should be properly indented so as to enable the reader to easily determine which statements are contained within each **for** statement. (ANSI C allows up to 15 levels of nesting. However, some compilers permit more.)

The program to print the multiplication table discussed in Example 4.2 can be written more concisely using nested **for** statements as follows:

```

for (row = 1; row <= ROWMAX ; ++row)
{
 for (column = 1; column <= COLMAX ; ++column)
 {
 y = row * column;
 printf("4d", y);
 }
 printf("\n");
}

```

The outer loop controls the rows while the inner loop controls the columns.

**EXAMPLE 4.13** A class of  $n$  students take an annual examination in  $m$  subjects. A program to read the marks obtained by each student in various subjects and to compute and print the total marks obtained by each of them is given in Fig. 4.15.

The program uses two **for** loops, one for controlling the number of students and the other for controlling the number of subjects. Since both the number of students and the number of subjects are requested by the program, the program may be used for a class of any size and any number of subjects.

The outer loop includes three parts:

- (1) reading of roll-numbers of students, one after another;
- (2) inner loop, where the marks are read and totalled for each student; and
- (3) printing of total marks and declaration of grades.

#### 4.32 Computer Programming

##### Program

```
#define FIRST 360
#define SECOND 240
main()
{
 int n, m, i, j,
 roll_number, marks, total;
 printf("Enter number of students and subjects\n");
 scanf("%d %d", &n, &m);
 printf("\n");
 for (i = 1; i <= n ; ++i)
 {
 printf("Enter roll_number : ");
 scanf("%d", &roll_number);
 total = 0 ;
 printf("\nEnter marks of %d subjects for ROLL NO %d\n",
 m, roll_number);
 for (j = 1; j <= m; j++)
 {
 scanf("%d", &marks);
 total = total + marks;
 }
 printf("TOTAL MARKS = %d ", total);
 if (total >= FIRST)
 printf("(First Division)\n\n");
 else if (total >= SECOND)
 printf("(Second Division)\n\n");
 else
 printf("(*** F A I L ***)\n\n");
 }
}
```

##### Output

```
Enter number of students and subjects
3 6
Enter roll_number : 8701
Enter marks of 6 subjects for ROLL NO 8701
81 75 83 45 61 59
TOTAL MARKS = 404 (First Division)
Enter roll_number : 8702
Enter marks of 6 subjects for ROLL NO 8702
51 49 55 47 65 41
TOTAL MARKS = 308 (Second Division)
Enter roll_number : 8704
Enter marks of 6 subjects for ROLL NO 8704
40 19 31 47 39 25
TOTAL MARKS = 201 (*** F A I L ***)
```

**Fig. 4.15** Illustration of *nested for loops*

### Selecting a Loop

Given a problem, the programmer's first concern is to decide the type of loop structure to be used. To choose one of the three loop supported by C, we may use the following strategy:

- Analyse the problem and see whether it required a pre-test or post-test loop.
- If it requires a post-test loop, then we can use only one loop, **do while**.
- If it requires a pre-test loop, then we have two choices: **for** and **while**.
- Decide whether the loop termination requires counter-based control or sentinel-based control.
- Use **for** loop if the counter-based control is necessary.
- Use **while** loop if the sentinel-based control is required.
- Note that both the counter-controlled and sentinel-controlled loops can be implemented by all the three control structures.

## 4.15 JUMPS IN LOOPS

Loops perform a set of operations repeatedly until the control variable fails to satisfy the test-condition. The number of times a loop is repeated is decided in advance and the test condition is written to achieve this. Sometimes, when executing a loop it becomes desirable to skip a part of the loop or to leave the loop as soon as a certain condition occurs. For example, consider the case of searching for a particular name in a list containing, say, 100 names. A program loop written for reading and testing the names 100 times must be terminated as soon as the desired name is found. C permits a *jump* from one statement to another within a loop as well as a *jump* out of a loop.

### 4.15.1 Jumping Out of a Loop

An early exit from a loop can be accomplished by using the **break** statement or the **goto** statement. We have already seen the use of the **break** in the **switch** statement and the **goto** in the **if...else** construct. These statements can also be used within **while**, **do**, or **for** loops. They are illustrated in Fig. 4.16 and Fig. 4.17.


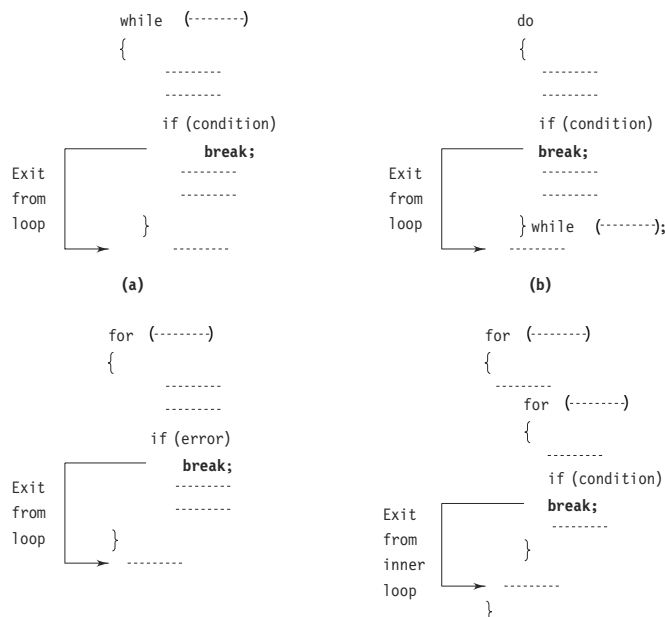


Fig. 4.16 Exiting a loop with **break** statement

#### 4.34 Computer Programming

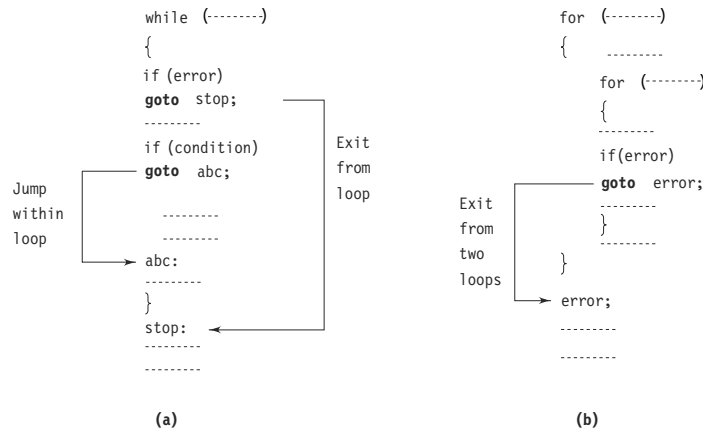

**Fig. 4.17** Jumping within and exiting from the loops with `goto` statement

When a **break** statement is encountered inside a loop, the loop is immediately exited and the program continues with the statement immediately following the loop. When the loops are nested, the **break** would only exit from the loop containing it. That is, the **break** will exit only a single loop.

Since a **goto** statement can transfer the control to any place in a program, it is useful to provide branching within a loop. Another important use of **goto** is to exit from deeply nested loops when an error occurs. A simple **break** statement would not work here.

**EXAMPLE 4.14** The program in Fig. 4.18 illustrates the use of the `break` statement in a C program.

The program reads a list of positive values and calculates their average. The **for** loop is written to read 1000 values. However, if we want the program to calculate the average of any set of values less than 1000, then we must enter a 'negative' number after the last value in the list, to mark the end of input.

##### Program

```

main()
{
 int m;
 float x, sum, average;
 printf("This program computes the average of a
 set of numbers\n");
 printf("Enter values one after another\n");
 printf("Enter a NEGATIVE number at the end.\n\n");
 sum = 0;
 for (m = 1 ; m <= 1000 ; ++m)
 {
 scanf("%f", &x);
 if (x < 0)
 break;
 sum += x ;
 }
}

```

(Contd.)

```

 average = sum/(float)(m-1);
 printf("\n");
 printf("Number of values = %d\n", m-1);
 printf("Sum = %f\n", sum);
 printf("Average = %f\n", average);
 }

```

**Output**

```

This program computes the average of a set of numbers
Enter values one after another
Enter a NEGATIVE number at the end.
21 23 24 22 26 22 -1
Number of values = 6
Sum = 138.000000
Average = 23.000000

```

**Fig. 4.18** Use of **break** in a program

Each value, when it is read, is tested to see whether it is a positive number or not. If it is positive, the value is added to the **sum**; otherwise, the loop terminates. On exit, the average of the values read is calculated and the results are printed out.

**EXAMPLE 4.15** A program to evaluate the series

$$\frac{1}{1+x} = 1 + x + x^2 + x^3 + \dots + x^n$$

for  $-1 < x < 1$  with 0.01 per cent accuracy is given in Fig. 4.19. The **goto** statement is used to exit the loop on achieving the desired accuracy.

We have used the **for** statement to perform the repeated addition of each of the terms in the series. Since it is an infinite series, the evaluation of the function is terminated when the term  $x^n$  reaches the desired accuracy. The value of  $n$  that decides the number of loop operations is not known and therefore we have decided arbitrarily a value of 100, which may or may not result in the desired level of accuracy.

**Program**

```

#define LOOP 100
#define ACCURACY 0.0001
main()
{
 int n;
 float x, term, sum;
 printf("Input value of x : ");
 scanf("%f", &x);
 sum = 0 ;
 for (term = 1, n = 1 ; n <= LOOP ; ++n)
 {
 sum += term ;
 if (term <= ACCURACY)
 goto output; /* EXIT FROM THE LOOP */
 term *= x ;
 }
}

```

(Contd.)

```

 printf("\nFINAL VALUE OF N IS NOT SUFFICIENT\n");
 printf("TO ACHIEVE DESIRED ACCURACY\n");
 goto end;
 output:
 printf("\nEXIT FROM LOOP\n");
 printf("Sum = %f; No.of terms = %d\n", sum, n);
 end:
 ; /* Null Statement */
}

```

**Output**

```

Input value of x : .21
EXIT FROM LOOP
Sum = 1.265800; No.of terms = 7
Input value of x : .75
EXIT FROM LOOP
Sum = 3.999774; No.of terms = 34
Input value of x : .99
FINAL VALUE OF N IS NOT SUFFICIENT
TO ACHIEVE DESIRED ACCURACY

```

**Fig. 4.19** Use of **goto** to exit from a loop

The test of accuracy is made using an **if** statement and the **goto** statement exits the loop as soon as the accuracy condition is satisfied. If the number of loop repetitions is not large enough to produce the desired accuracy, the program prints an appropriate message.

Note that the **break** statement is not very convenient to use here. Both the normal exit and the **break** exit will transfer the control to the same statement that appears next to the loop. But, in the present problem, the normal exit prints the message

“FINAL VALUE OF N IS NOT SUFFICIENT  
TO ACHIEVE DESIRED ACCURACY”

and the *forced exit* prints the results of evaluation. Notice the use of a *null* statement at the end. This is necessary because a program should not end with a label.

**Structured Programming**

Structured programming is an approach to the design and development of programs. It is a discipline of making a program's logic easy to understand by using only the basic three control structures:

- Sequence (straight line) structure
- Selection (branching) structure
- Repetition (looping) structure

While sequence and loop structures are sufficient to meet all the requirements of programming, the selection structure proves to be more convenient in some situations.

The use of structured programming techniques helps ensure well-designed programs that are easier to write, read, debug and maintain compared to those that are unstructured.

Structured programming discourages the implementation of unconditional branching using jump statements such as **goto**, **break** and **continue**. In its purest form, structured programming is synonymous with “*goto less programming*”.

Do not go to **goto** statement!

**4.15.2 Skipping a Part of a Loop**

During the loop operations, it may be necessary to skip a part of the body of the loop under certain conditions. For example, in processing of applications for some job, we might like to exclude the processing of data of

applicants belonging to a certain category. On reading the category code of an applicant, a test is made to see whether his application should be considered or not. If it is not to be considered, the part of the program loop that processes the application details is skipped and the execution continues with the next loop operation.

Like the **break** statement, C supports another similar statement called the **continue** statement. However, unlike the **break** which causes the loop to be terminated, the **continue**, as the name implies, causes the loop to be continued with the next iteration after skipping any statements in between. The **continue** statement tells the compiler, “SKIP THE FOLLOWING STATEMENTS AND CONTINUE WITH THE NEXT ITERATION”. The format of the **continue** statement is simply

```
continue;
```

The use of the **continue** statement in loops is illustrated in Fig. 4.20. In **while** and **do** loops, **continue** causes the control to go directly to the test-condition and then to continue the iteration process. In the case of **for** loop, the increment section of the loop is executed before the test-condition is evaluated.

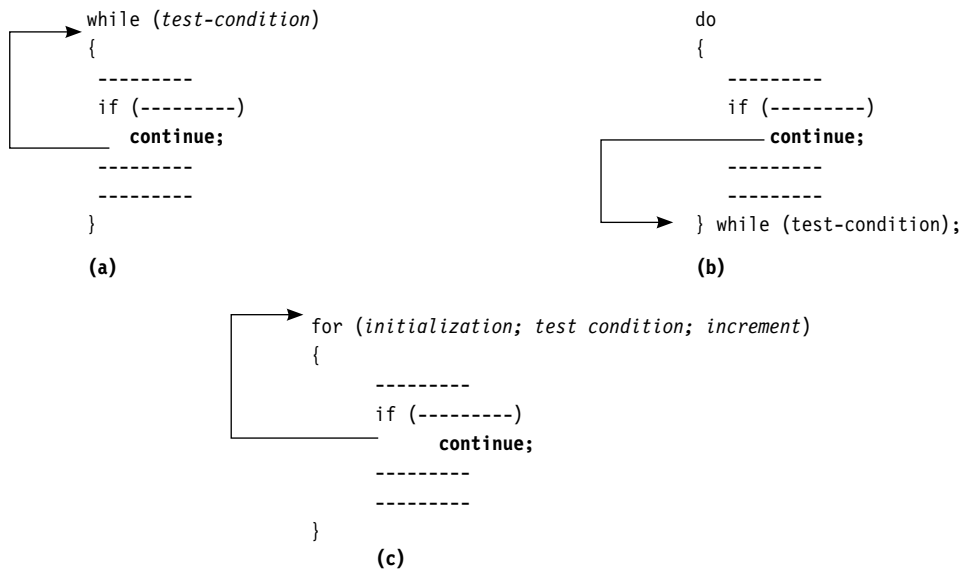


Fig. 4.20 Bypassing and continuing in loops

**EXAMPLE 4.16** The program in Fig. 4.21 illustrates the use of `continue` statement.

The program evaluates the square root of a series of numbers and prints the results. The process stops when the number 9999 is typed in.

In case, the series contains any negative numbers, the process of evaluation of square root should be bypassed for such numbers because the square root of a negative number is not defined. The **continue** statement is used to achieve this. The program also prints a message saying that the number is negative and keeps an account of negative numbers.

The final output includes the number of positive values evaluated and the number of negative items encountered.

#### 4.38 Computer Programming

**Program:**

```
#include <math.h>
main()
{
 int count, negative;
 double number, sqroot;
 printf("Enter 9999 to STOP\n");
 count = 0 ;
 negative = 0 ;
 while (count <= 100)
 {
 printf("Enter a number : ");
 scanf("%lf", &number);
 if (number == 9999)
 break; /* EXIT FROM THE LOOP */
 if (number < 0)
 {
 printf("Number is negative\n\n");
 negative++ ;
 continue; /* SKIP REST OF THE LOOP */
 }
 sqroot = sqrt(number);
 printf("Number = %lf\n Square root = %lf\n\n",
 number, sqroot);
 count++ ;
 }
 printf("Number of items done = %d\n", count);
 printf("\n\nNegative items = %d\n", negative);
 printf("END OF DATA\n");
}
```

**Output**

```
Enter 9999 to STOP
Enter a number : 25.0
Number = 25.000000
Square root = 5.000000
Enter a number : 40.5
Number = 40.500000
Square root = 6.363961
Enter a number : -9
Number is negative
Enter a number : 16
Number = 16.000000
Square root = 4.000000
Enter a number : -14.75
Number is negative
Enter a number : 80
Number = 80.000000
Square root = 8.944272
Enter a number : 9999
Number of items done = 4
Negative items = 2
END OF DATA
```

**Fig. 4.21** Use of *continue* statement



### 4.15.3 Avoiding goto

As mentioned earlier, it is a good practice to avoid using **goto**. There are many reasons for this. When **goto** is used, many compilers generate a less efficient code. In addition, using many of them makes a program logic complicated and renders the program unreadable. It is possible to avoid using **goto** by careful program design. In case any **goto** is absolutely necessary, it should be documented. The **goto** jumps shown in Fig. 4.22 would cause problems and therefore must be avoided.

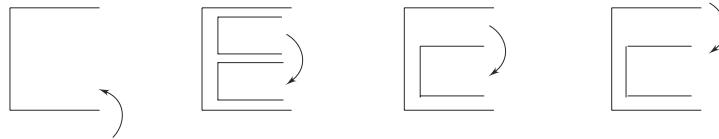


Fig. 4.22 goto jumps to be avoided

### 4.15.4 Jumping out of the Program

We have just seen that we can jump out of a loop using either the **break** statement or **goto** statement. In a similar way, we can jump out of a program by using the library function **exit()**. In case, due to some reason, we wish to break out of a program and return to the operating system, we can use the **exit()** function, as shown below:

```
.....
.....
if (test-condition) exit(0) ;
.....
.....
```

The **exit()** function takes an integer value as its argument. Normally *zero* is used to indicate normal termination and a *nonzero* value to indicate termination due to some error or abnormal condition. The use of **exit()** function requires the inclusion of the header file **<stdlib.h>**.

### Just Remember

- Character constants are enclosed in single quotes and string constants are enclosed in double quotes.
- Allocate sufficient space in a character array to hold the null character at the end.
- Avoid processing single characters as strings.
- Using the address operator **&** with a **string** variable in the **scanf** function call is an error.
- It is a compile time error to assign a string to a character variable.
- Using a string variable name on the left of the assignment operator is illegal.
- When accessing individual characters in a string variable, it is logical error to access outside the array bounds.
- Strings cannot be manipulated with operators. Use string functions.
- Do not use string functions on an array **char** type that is not terminated with the null character.
- Do not forget to append the null character to the target string when the number of characters copied is less than or equal to the source string.
- Be aware the return values when using the functions **strcmp** and **strncmp** for comparing strings.
- When using string functions for copying and concatenating strings, make sure that the target string has enough space to store the

resulting string. Otherwise memory overwriting may occur.

- The header file `<stdio.h>` is required when using standard I/O functions.
- The header file `<ctype.h>` is required when using character handling functions.
- The header file `<stdlib.h>` is required when using general utility functions.
- The header file `<string.h>` is required when using string manipulation functions.
- A string is nothing but a character array terminated with a null character.
- `gets` and `puts` are quite handy string i/o functions.
- arithmetic operations are actually performed on the ASCII values of the operand characters.
- Use `strlen` function to determine the length of a string.
- Do not forget to place the semicolon at the end of **do ....while** statement.
- Placing a semicolon after the control expression in a **while** or **for** statement is not a syntax error but it is most likely a logic error.
- Using commas rather than semicolon in the header of a **for** statement is an error.
- Do not forget to place the *increment* statement in the body of a **while** or **do...while** loop.
- It is a common error to use wrong relational operator in test expressions. Ensure that the loop is evaluated exactly the required number of times.
- Avoid a common error using `=` in place of `==` operator.
- Do not change the control variable in both the **for** statement and the body of the loop. It is a logic error.
- Do not compare floating-point values for equality.
- Avoid using **while** and **for** statements for implementing exit-controlled (post-test) loops. Use **do...while** statement. Similarly, do not use **do...while** for pre-test loops.

- When performing an operation on a variable repeatedly in the body of a loop, make sure that the variable is initialized properly before entering the loop.
  - Although it is legally allowed to place the initialization, testing and increment sections outside the header of a **for** statement, avoid them as far as possible.
  - Although it is permissible to use arithmetic expressions in initialization and increment section, be aware of round off and truncation errors during their evaluation.
  - Although statements preceding a **for** and statements in the body can be placed in the **for** header, avoid doing so as it makes the program more difficult to read.
  - The use of **break** and **continue** statements in any of the loops is considered unstructured programming. Try to eliminate the use of these jump statements, as far as possible.
  - Avoid the use of **goto** anywhere in the program.
  - Indent the statements in the body of loops properly to enhance readability and understandability.
  - Use of blank spaces before and after the loops and terminating remarks are highly recommended.
  - Use the function **exit()** only when breaking out of a program is necessary.
  - While writing a program never forget to visualise and implement a loop-exit situation for any looping construct.
  - Choose the while and do-while loops carefully as in the later case, the loop body is always executed at least once.
  - Use the jump statements very carefully as they alter the flow of program control.
  - Use the **continue** statement for skipping the remaining part of the current iteration of a loop.
-

## Multiple Choice Questions

1. Which of the following is used to represent the end of a string?
  - (a) Blank space
  - (b) Null character
  - (c) Newline character
  - (d) Last element of the string
2. Which of the following is used to display a string on the I/O console?
  - (a) %s
  - (b) %c
  - (c) %d
  - (d) %f
3. Which of the following is true for getchar?
  - (a) Read a string of characters
  - (b) Read a character
  - (c) Read the characters until \n is encountered
  - (d) None of the above
4. What will be the result of the following character arithmetic expression?  
X= 'A'-2;
  - (a) 63
  - (b) 64
  - (c) 65
  - (d) 66
5. Which of the following is used to determine the length of a string?
  - (a) strlen
  - (b) strcmp
  - (c) strcpy
  - (d) strcat
6. Which of the following header files are required to be included for performing string operations?
  - (a) string.h
  - (b) conio.h
  - (c) stdio.h
  - (d) ctype.h
7. What value will strlen function return for the string {'R','a','m','\0'}
  - (a) 3
  - (b) 4
8. During concatenation, which of the following situation will occur if the target string is of lesser space then the two source strings?
  - (a) Overflow
  - (b) Underflow
  - (c) Memory leakage
  - (d) None of the above
9. Which of the following is the correct syntax for copying a string S1 into S2?
  - (a) strcpy(S2,S1);
  - (b) strcpy(S1,S2);
  - (c) strcmp(S1,S2);
  - (d) strcmp(S2,S1);
10. Which of the following should be used for printing a " inside the printf statement?
  - (a) ""
  - (b) "\
  - (c) \"
  - (d) /"
11. A typical loop comprises of which of the following?
  - (a) Body of the loop
  - (b) Control statement
  - (c) Break statement
  - (d) Continue statement
12. do-while loop is an example of which of the following?
  - (a) Exit controlled loop
  - (b) Entry controlled loop
  - (c) Pre-test loop
  - (d) Post-test loop
13. Which of the following loop constructs execute body of the loop at least once?
  - (a) while
  - (b) do-while
  - (c) for
  - (d) All of the above
14. If it is known in advance the number of times a loop is going to execute, then that loop is termed as:
  - (a) Counter-controlled loop
  - (b) Sentinel-controlled loop
  - (c) Definite repetitive loop
  - (d) Indefinite repetitive loop
15. Which of the following is the correct syntax for while loop?
  - (a) while (test condition)
 

```
{
Statement block
}
```
  - (b) while (test condition)
 

```
{
Statement block
};
```
  - (c) while
 

```
{
statement block
}(test condition)
```

#### 4.42 Computer Programming

- (d) while  
    {  
        statement block  
    }
16. Which of the following is the correct syntax for dowhile loop?  
(a) do-while (test condition)  
    {  
        Statement block  
    }(test condition)  
(b) do  
    {  
        Statement block  
    }while(test condition);  
(c) {  
    statement block  
}do-while(test condition);  
(d) do  
    {  
        Statement block  
    }while(test condition)
17. Which of the following is the correct syntax of for loop?  
(a) for (a=0: a<b: a++)  
(b) for (a=0, a<b, a++)  
(c) for (a=0; a<b; a++)  
(d) for (a=0; a++; a<b)
18. Which of the following is typically used to jump out of loop?  
(a) jump;                      (b) goto;  
(c) break;                    (d) None of the above
19. The structured programming approach suggests avoiding the use of which of the following statements?  
(a) goto                      (b) exit  
(c) continue                (d) sizeof
20. Which of the following doesn't alter the flow of program control?  
(a) break  
(b) continue  
(c) exit  
(d) All of the above will alter the flow of program control

---

## Case Study

---

### 1. Counting Words in a Text

One of the practical applications of string manipulations is counting the words in a text. We assume that a word is a sequence of any characters, except escape characters and blanks, and that two words are separated by one blank character. The algorithm for counting words is as follows:

1. Read a line of text.
2. Beginning from the first character in the line, look for a blank. If a blank is found, increment words by 1.
3. Continue steps 1 and 2 until the last line is completed.

The implementation of this algorithm is shown in Fig. 4.23. The first **while** loop will be executed once for each line of text. The end of text is indicated by pressing the 'Return' key an extra time after the entire text has been entered. The extra 'Return' key causes a newline character as input to the last line and as a result, the last line contains only the null character.

The program checks for this special line using the test

if ( line[0] == '\0')

and if the first (and only the first) character in the line is a null character, then counting is terminated. Note the difference between a null character and a blank character.

**Program**

```

#include <stdio.h>
main()
{
 char line[81], ctr;
 int i,c,
 end = 0,
 characters = 0,
 words = 0,
 lines = 0;
 printf("KEY IN THE TEXT.\n");
 printf("GIVE ONE SPACE AFTER EACH WORD.\n");
 printf("WHEN COMPLETED, PRESS 'RETURN'.\n\n");
 while(end == 0)
 {
 /* Reading a line of text */
 c = 0;
 while((ctr=getchar()) != '\n')
 line[c++] = ctr;
 line[c] = '\0';
 /* counting the words in a line */
 if(line[0] == '\0')
 break ;
 else
 {
 words++;
 for(i=0; line[i] != '\0';i++)
 if(line[i] == ' ' || line[i] == '\t')
 words++;
 }
 /* counting lines and characters */
 lines = lines +1;
 characters = characters + strlen(line);
 }
 printf ("\n");
 printf("Number of lines = %d\n", lines);
 printf("Number of words = %d\n", words);
 printf("Number of characters = %d\n", characters);
}

```

**Output**

```

KEY IN THE TEXT.
GIVE ONE SPACE AFTER EACH WORD.
WHEN COMPLETED, PRESS 'RETURN'.
Admiration is a very short-lived passion.
Admiration involves a glorious obliquity of vision.
Always we like those who admire us but we do not
like those whom we admire.
Fools admire, but men of sense approve.
Number of lines = 5
Number of words = 36
Number of characters = 205

```

**Fig. 4.23** Counting of characters, words and lines in a text

#### 4.44 Computer Programming

The program also counts the number of lines read and the total number of characters in the text. Remember, the last line containing the null string is not counted.

After the first **while** loop is exited, the program prints the results of counting.

## 2. Processing of a Customer List

Telephone numbers of important customers are recorded as follows:

| Full name             | Telephone number |
|-----------------------|------------------|
| Joseph Louis Lagrange | 869245           |
| Jean Robert Argand    | 900823           |
| Carl Freidrich Gauss  | 806788           |
| _____                 | _____            |
| _____                 | _____            |

It is desired to prepare a revised alphabetical list with surname (last name) first, followed by a comma and the initials of the first and middle names. For example,

Argand,J.R

We create a table of strings, each row representing the details of one person, such as first\_name, middle\_name, last\_name, and telephone\_number. The columns are interchanged as required and the list is sorted on the last\_name. Figure 4.24 shows a program to achieve this.

### Program

```
#define CUSTOMERS 10
main()
{
 char first_name[20][10], second_name[20][10],
 surname[20][10], name[20][20],
 telephone[20][10], dummy[20];

 int i,j;
 printf("Input names and telephone numbers \n");
 printf("?");
 for(i=0; i < CUSTOMERS ; i++)
 {
 scanf("%s %s %s %s", first_name[i],
 second_name[i], surname[i], telephone[i]);
 /* converting full name to surname with initials */
 strcpy(name[i], surname[i]);
 strcat(name[i], ",");
 dummy[0] = first_name[i][0];
 dummy[1] = '\0';
 strcat(name[i], dummy);
 strcat(name[i], ".");
 dummy[0] = second_name[i][0];
 dummy[1] = '\0';
 strcat(name[i], dummy);
 }
 /* Alphabetical ordering of surnames */
 for(i=1; i <= CUSTOMERS-1; i++)
 for(j=1; j <= CUSTOMERS-i; j++)
```

(Contd.)

```

if(strcmp (name[j-1], name[j]) > 0)
{
 /* Swaping names */
 strcpy(dummy, name[j-1]);
 strcpy(name[j-1], name[j]);
 strcpy(name[j], dummy);

 /* Swaping telephone numbers */
 strcpy(dummy, telephone[j-1]);
 strcpy(telephone[j-1], telephone[j]);
 strcpy(telephone[j], dummy);
}

/* printing alphabetical list */
printf("\nCUSTOMERS LIST IN ALPHABETICAL ORDER \n\n");
for(i=0; i < CUSTOMERS ; i++)
 printf(" %-20s\t %-10s\n", name[i], telephone[i]);
}

```

**Output**

```

Input names and telephone numbers
?Gottfried Wilhelm Leibniz 711518
Joseph Louis Lagrange 869245
Jean Robert Argand 900823
Carl Freidrich Gauss 806788
Simon Denis Poisson 853240
Friedrich Wilhelm Bessel 719731
Charles Francois Sturm 222031
George Gabriel Stokes 545454
Mohandas Karamchand Gandhi 362718
Josian Willard Gibbs 123145

```

CUSTOMERS LIST IN ALPHABETICAL ORDER

|               |        |
|---------------|--------|
| Argand, J.R   | 900823 |
| Bessel, F.W   | 719731 |
| Gandhi, M.K   | 362718 |
| Gauss, C.F    | 806788 |
| Gibbs, J.W    | 123145 |
| Lagrange, J.L | 869245 |
| Leibniz, G.W  | 711518 |
| Poisson, S.D  | 853240 |
| Stokes, G.G   | 545454 |
| Sturm, C.F    | 222031 |

**Fig. 4.24** Program to alphabetize a customer list

### 3. Table of Binomial Coefficients

**Problem:** Binomial coefficients are used in the study of binomial distributions and reliability of multicomponent redundant systems. It is given by

$$B(m, x) = \binom{m}{x} = \frac{m!}{x!(m-x)!}, \quad m \geq x$$

A table of binomial coefficients is required to determine the binomial coefficient for any set of  $m$  and  $x$ .

#### 4.46 Computer Programming

**Problem Analysis:** The binomial coefficient can be recursively calculated as follows:

$$B(m,0) = 1$$

$$B(m,x) = B(m,x-1) \left[ \frac{m-x+1}{x} \right], x = 1,2,3,\dots,m$$

Further,

$$B(0,0) = 1$$

That is, the binomial coefficient is one when either  $x$  is zero or  $m$  is zero. The program in Fig. 4.25 prints the table of binomial coefficients for  $m = 10$ . The program employs one **do** loop and one **while** loop.

##### Program

```
#define MAX 10
main()
{
 int m, x, binom;
 printf(" m x");
 for (m = 0; m <= 10 ; ++m)
 printf("%4d", m);
 printf("\n-----\n");
 m = 0;
 do
 {
 printf("%2d ", m);
 x = 0; binom = 1;
 while (x <= m)
 {
 if(m == 0 || x == 0)
 printf("%4d", binom);
 else
 {
 binom = binom * (m - x + 1)/x;
 printf("%4d", binom);
 }
 x = x + 1;
 }
 printf("\n");
 m = m + 1;
 }
 while (m <= MAX);
 printf("-----\n");
}
```

##### Output

| mx | 0 | 1 | 2  | 3  | 4  | 5 | 6 | 7 | 8 | 9 | 10 |
|----|---|---|----|----|----|---|---|---|---|---|----|
| 0  | 1 |   |    |    |    |   |   |   |   |   |    |
| 1  | 1 | 1 |    |    |    |   |   |   |   |   |    |
| 2  | 1 | 2 | 1  |    |    |   |   |   |   |   |    |
| 3  | 1 | 3 | 3  | 1  |    |   |   |   |   |   |    |
| 4  | 1 | 4 | 6  | 4  | 1  |   |   |   |   |   |    |
| 5  | 1 | 5 | 10 | 10 | 5  | 1 |   |   |   |   |    |
| 6  | 1 | 6 | 15 | 20 | 15 | 6 | 1 |   |   |   |    |

(Contd.)



|    |   |    |    |     |     |     |     |     |    |    |   |
|----|---|----|----|-----|-----|-----|-----|-----|----|----|---|
| 7  | 1 | 7  | 21 | 35  | 35  | 21  | 7   | 1   |    |    |   |
| 8  | 1 | 8  | 28 | 56  | 70  | 56  | 28  | 8   | 1  |    |   |
| 9  | 1 | 9  | 36 | 84  | 126 | 126 | 84  | 36  | 9  | 1  |   |
| 10 | 1 | 10 | 45 | 120 | 210 | 252 | 210 | 120 | 45 | 10 | 1 |

Fig. 4.25 Program to print *binomial coefficient* table

## 2. Histogram

**Problem:** In an organization, the employees are grouped according to their basic pay for the purpose of certain perks. The pay-range and the number of employees in each group are as follows:

| Group | Pay-Range   | Number of Employees |
|-------|-------------|---------------------|
| 1     | 750 – 1500  | 12                  |
| 2     | 1501 – 3000 | 23                  |
| 3     | 3001 – 4500 | 35                  |
| 4     | 4501 – 6000 | 20                  |
| 5     | above 6000  | 11                  |

Draw a histogram to highlight the group sizes.

**Problem Analysis:** Given the size of groups, it is required to draw bars representing the sizes of various groups. For each bar, its group number and size are to be written.

Program in Fig. 4.26 reads the number of employees belonging to each group and draws a histogram. The program uses four **for** loops and two **if.....else** statements.

### Program

```
#define N 5
main()
{
 int value[N];
 int i, j, n, x;
 for (n=0; n < N; ++n)
 {
 printf("Enter employees in Group - %d : ",n+1);
 scanf("%d", &x);
 value[n] = x;
 printf("%d\n", value[n]);
 }
 printf("\n");
 printf("|\n");
 for (n = 0 ; n < N ; ++n)
 {
 for (i = 1 ; i <= 3 ; i++)
 {
 if (i == 2)
 printf("Group-%1d |",n+1);
 else
 printf("|");
 for (j = 1 ; j <= value[n]; ++j)
 printf("*");
 }
 }
}
```

(Contd.)

#### 4.48 Computer Programming

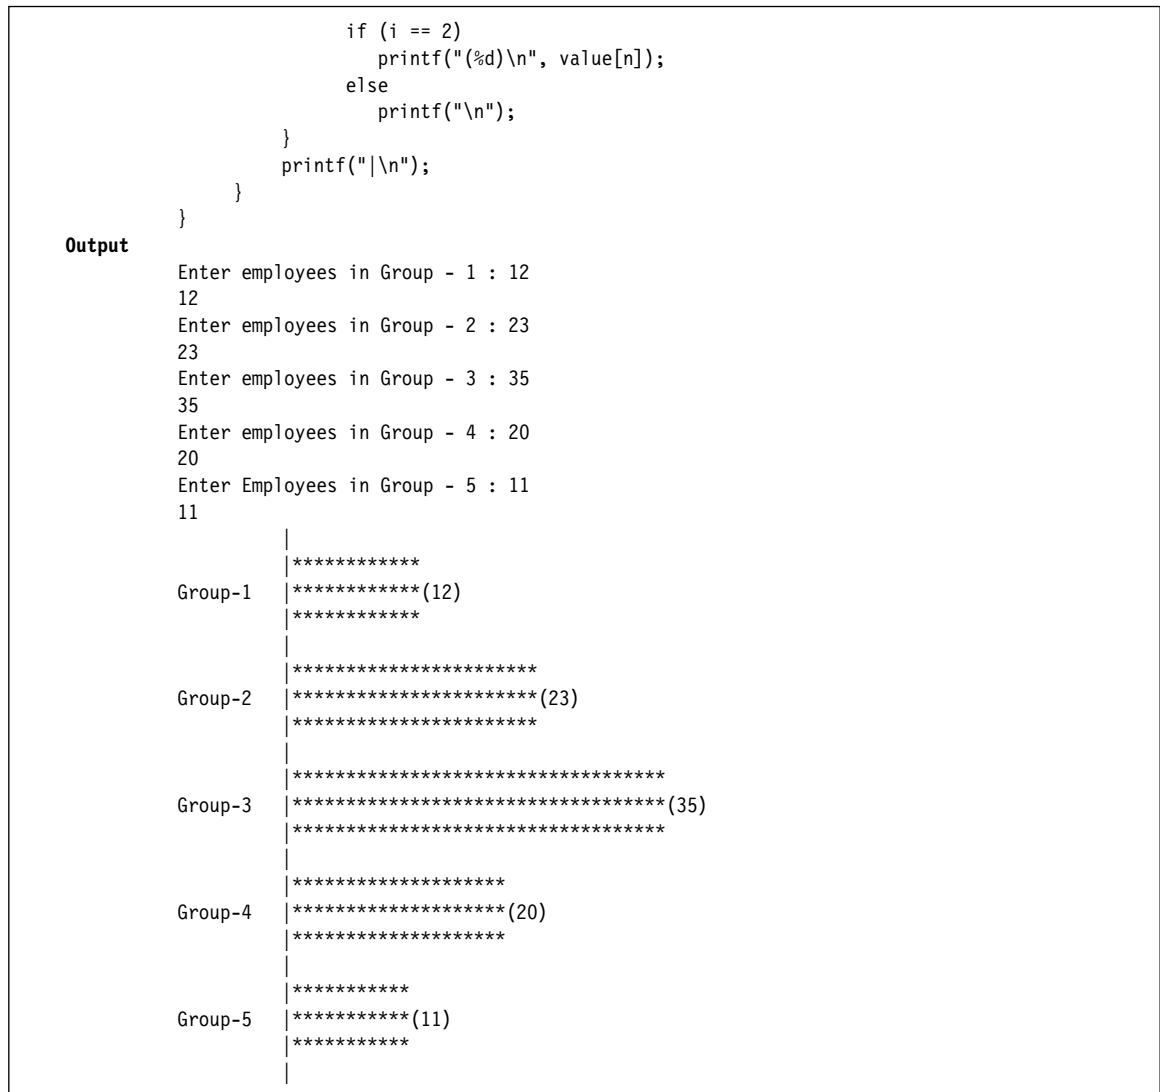


Fig. 4.26 Program to draw a histogram

### 3. Minimum Cost

**Problem:** The cost of operation of a unit consists of two components  $C_1$  and  $C_2$  which can be expressed as functions of a parameter  $p$  as follows:

$$\begin{aligned} C_1 &= 30 - 8p \\ C_2 &= 10 + p^2 \end{aligned}$$

The parameter  $p$  ranges from 0 to 10. Determine the value of  $p$  with an accuracy of  $\pm 0.1$  where the cost of operation would be minimum.

**Problem Analysis:**

$$\text{Total cost} = C_1 + C_2 = 40 - 8p + p^2$$

The cost is 40 when  $p = 0$ , and 33 when  $p = 1$  and 60 when  $p = 10$ . The cost, therefore, decreases first and then increases. The program in Fig. 4.27 evaluates the cost at successive intervals of  $p$  (in steps of 0.1) and stops when the cost begins to increase. The program employs **break** and **continue** statements to exit the loop.

**Program**

```
main()
{
 float p, cost, p1, cost1;
 for (p = 0; p <= 10; p = p + 0.1)
 {
 cost = 40 - 8 * p + p * p;
 if(p == 0)
 {
 cost1 = cost;
 continue;
 }
 if (cost >= cost1)
 break;
 cost1 = cost;
 p1 = p;
 }
 p = (p + p1)/2.0;
 cost = 40 - 8 * p + p * p;
 printf("\nMINIMUM COST = %.2f AT p = %.1f\n",
 cost, p);
}
```

**Output**

```
MINIMUM COST = 24.00 AT p = 4.0
```

**Fig. 4.27** Program of minimum cost problem

## 4. Plotting of Two Functions

**Problem:** We have two functions of the type

$$y1 = \exp(-ax)$$

$$y2 = \exp(-ax^2/2)$$

Plot the graphs of these functions for  $x$  varying from 0 to 5.0.

**Program**

```
#include <math.h>
main()
{
 int i;
 float a, x, y1, y2;
 a = 0.4;
 printf(" Y ----> \n");
```

(Contd.)

#### 4.50 Computer Programming

```
printf(" 0 -----\\n");
for (x = 0; x < 5; x = x+0.25)
{ /* BEGINNING OF FOR LOOP */
/*.....Evaluation of functions*/
 y1 = (int) (50 * exp(-a * x) + 0.5);
 y2 = (int) (50 * exp(-a * x * x/2) + 0.5);
/*.....Plotting when y1 = y2.....*/
 if (y1 == y2)
 {
 if (x == 2.5)
 printf(" X |");
 else
 printf("|");
 for (i = 1; i <= y1 - 1; ++i)
 printf(" ");
 printf("#\\n");
 continue;
 }
/*..... Plotting when y1 > y2*/
 if (y1 > y2)
 {
 if (x == 2.5)
 printf(" X |");
 else
 printf(" |");
 for (i = 1; i <= y2 - 1 ; ++i)
 printf(" ");
 printf("*");
 for (i = 1; i <= (y1 - y2 - 1); ++i)
 printf("-");
 printf("0\\n");
 continue;
 }
/*..... Plotting when y2 > y1.....*/
 if (x == 2.5)
 printf(" X |");
 else
 printf(" |");
 for (i = 1 ; i <= (y1 - 1); ++i)
 printf(" ");
 printf("0");
 for (i = 1; i <= (y2 - y1 - 1); ++i)
 printf("-");
 printf("*\\n");
} /*.....END OF FOR LOOP.....*/
printf(" |\\n");
}
```

(Contd.)

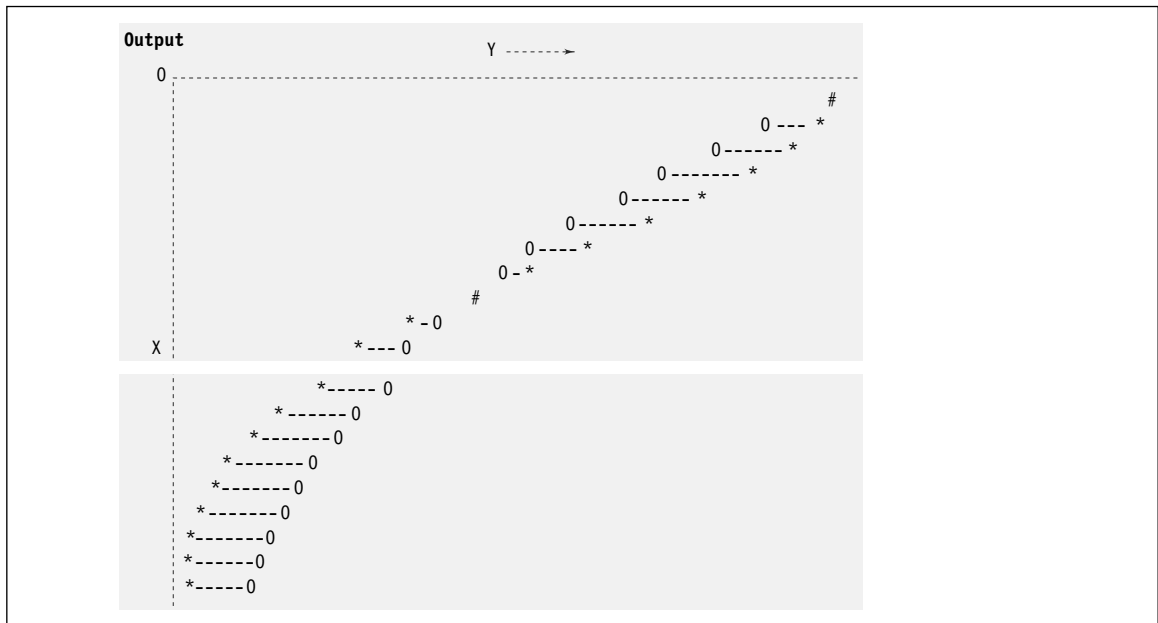


Fig. 4.28 Plotting of two functions

**Problem Analysis:** Initially when  $x = 0$ ,  $y_1 = y_2 = 1$  and the graphs start from the same point. The curves cross when they are again equal at  $x = 2.0$ . The program should have appropriate branch statements to print the graph points at the following three conditions:

1.  $y_1 > y_2$
2.  $y_1 < y_2$
3.  $y_1 = y_2$

The functions  $y_1$  and  $y_2$  are normalized and converted to integers as follows:

$$y_1 = 50 \exp(-ax) + 0.5$$

$$y_2 = 50 \exp(-ax^2/2) + 0.5$$

The program in Fig. 4.28 plots these two functions simultaneously. (0 for  $y_1$ , \* for  $y_2$ , and # for the common point.)

## Review Questions

- 4.1 State whether the following statements are *true* or *false*.
  - (a) When initializing a string variable during its declaration, we must include the null character as part of the string constant, like "GOOD\0".
  - (b) The **gets** function automatically appends the null character at the end of the string read from the keyboard.
  - (c) When reading a string with **scanf**, it automatically inserts the terminating null character.
  - (d) String variables cannot be used with the assignment operator.
  - (e) We cannot perform arithmetic operations on character variables.
  - (f) We can assign a character constant or a character variable to an **int** type variable.

#### 4.52 Computer Programming

- (g) The function **scanf** cannot be used in any way to read a line of text with the white-spaces.
  - (h) The ASCII character set consists of 128 distinct characters.
  - (i) In the ASCII collating sequence, the uppercase letters precede lowercase letters.
  - (j) In C, it is illegal to mix character data with numeric data in arithmetic operations.
  - (k) The function **getchar** skips white-space during input.
  - (l) In C, strings cannot be initialized at run time.
  - (m) The input function **gets** has one string parameter.
  - (n) The function call **strcpy(s2, s1)**; copies string s2 into string s1.
  - (o) The function call **strcmp("abc", "ABC")**; returns a positive number.
- 4.2 Fill in the blanks in the following statements.
- (a) We can use the conversion specification \_\_\_\_\_ in **scanf** to read a line of text.
  - (b) We can initialize a string using the string manipulation function \_\_\_\_\_.
  - (c) The function **strncat** has \_\_\_\_\_ parameters.
  - (d) To use the function **atoi** in a program, we must include the header file \_\_\_\_\_.
  - (e) The function \_\_\_\_\_ does not require any conversion specification to read a string from the keyboard.
  - (f) The function \_\_\_\_\_ is used to determine the length of a string.
  - (g) The \_\_\_\_\_ string manipulation function determines if a character is contained in a string.
  - (h) The function \_\_\_\_\_ is used to sort the strings in alphabetical order.
  - (i) The function call **strcat(s2, s1)**; appends \_\_\_\_\_ to \_\_\_\_\_.
  - (j) The **printf** may be replaced by function \_\_\_\_\_ for printing strings.
- 4.3 Describe the limitations of using **getchar** and **scanf** functions for reading strings.

4.4 Character strings in C are automatically terminated by the *null* character. Explain how this feature helps in string manipulations.

4.5 Strings can be assigned values as follows:

- (a) During type declaration  
`char string[ ] = {"....."};`
- (b) Using **strcpy** function  
`strcpy(string, ".....");`
- (c) Reading using **scanf** function  
`scanf("%s", string);`
- (d) Reading using **gets** function  
`gets(string);`

Compare them critically and describe situations where one is superior to the others.

4.6 Assuming the variable **string** contains the value "The sky is the limit.", determine what output of the following program segments will be.

- (a) `printf("%s", string);`
- (b) `printf("%.25.10s", string);`
- (c) `printf("%s", string[0]);`
- (d) `for (i=0; string[i] != "."; i++)  
    printf("%c", string[i]);`
- (e) `for (i=0; string[i] != '\0'; i++)  
    printf("%d\n", string[i]);`
- (f) `for (i=0; i <= strlen(string); ;)  
    {  
        string[i++] = i;  
        printf("%s\n", string[i]);  
    }`
- (g) `printf("%c\n", string[10] + 5);`
- (h) `printf("%c\n", string[10] + 5')`

4.7 Which of the following statements will correctly store the concatenation of strings **s1** and **s2** in string **s3**?

- (a) `s3 = strcat(s1, s2);`
- (b) `strcat(s1, s2, s3);`
- (c) `strcat(s3, s2, s1);`
- (d) `strcpy(s3, strcat(s1, s2));`
- (e) `strcmp(s3, strcat(s1, s2));`
- (f) `strcpy(strcat(s1, s2), s3);`

4.8 What will be the output of the following statement?

```
printf ("%d", strcmp ("push", "pull"));
```

- 4.9 Assume that s1, s2 and s3 are declared as follows:

```
char s1[10] = "he", s2[20] = "she",
s3[30], s4[30];
```

What will be the output of the following statements executed in sequence?

```
printf("%s", strcpy(s3, s1));
printf("%s", strcat(strcat(strcpy(s4, s1),
"or"), s2));
printf("%d %d", strlen(s2)+strlen(s3),
strlen(s4));
```

- 4.10 Find errors, if any, in the following code segments;

- (a) 

```
char str[10]
 strncpy(str, "GOD", 3);
 printf("%s", str);
```
- (b) 

```
char str[10];
 strcpy(str, "Balagurusamy");
```
- (c) 

```
if strstr("Balagurusamy", "guru") == 0);
 printf("Substring is found");
```
- (d) 

```
char s1[5], s2[10],
 gets(s1, s2);
```

- 4.11 What will be the output of the following segment?

```
char s1[] = "Kolkotta" ;
char s2[] = "Pune" ;
strcpy (s1, s2) ;
printf("%s", s1) ;
```

- 4.12 What will be the output of the following segment?

```
char s1[] = "NEW DELHI" ;
char s2[] = "BANGALORE" ;
strncpy (s1, s2, 3) ;
printf("%s", s1) ;
```

- 4.13 What will be the output of the following code?

```
char s1[] = "Jabalpur" ;
char s2[] = "Jaipur" ;
printf(strncmp(s1, s2, 2));
```

- 4.14 What will be the output of the following code?

```
char s1[] = "ANIL KUMAR GUPTA";
char s2[] = "KUMAR";
printf(strstr (s1, s2));
```

- 4.15 Compare the working of the following functions:

- (a) `strcpy` and `strncpy`;

- (b) `strcat` and `strncat`; and

- (c) `strcmp` and `strncmp`.

- 4.16 State whether the following statements are *true* or *false*.

- (a) The **do...while** statement first executes the loop body and then evaluate the loop control expression.
- (b) In a pretest loop, if the body is executed **n** times, the test expression is executed **n + 1** times.
- (c) The number of times a control variable is updated always equals the number of loop iterations.
- (d) Both the pretest loops include initialization within the statement.
- (e) In a **for** loop expression, the starting value of the control variable must be less than its ending value.
- (f) The initialization, test condition and increment parts may be missing in a **for** statement.
- (g) **while** loops can be used to replace **for** loops without any change in the body of the loop.
- (h) An exit-controlled loop is executed a minimum of one time.
- (i) The use of **continue** statement is considered as unstructured programming.
- (j) The three loop expressions used in a **for** loop header must be separated by commas.

- 4.17 Fill in the blanks in the following statements.

- (a) In an exit-controlled loop, if the body is executed **n** times, the test condition is evaluated \_\_\_\_\_ times.
- (b) The \_\_\_\_\_ statement is used to skip a part of the statements in a loop.
- (c) A **for** loop with the no test condition is known as \_\_\_\_\_ loop.
- (d) The sentinel-controlled loop is also known as \_\_\_\_\_ loop.
- (e) In a counter-controlled loop, variable known \_\_\_\_\_ as is used to count the loop operations.

#### 4.54 Computer Programming

- 4.18 Can we change the value of the control variable in **for** statements? If yes, explain its consequences.
- 4.19 What is a null statement? Explain a typical use of it.
- 4.20 Use of **goto** should be avoided. Explain a typical example where we find the application of **goto** becomes necessary.
- 4.21 How would you decide the use of one of the three loops in C for a given problem?
- 4.22 How can we use **for** loops when the number of iterations are not known?
- 4.23 Explain the operation of each of the following **for** loops.
- (a) 

```
for (n = 1; n != 10; n += 2)
 sum = sum + n;
```
  - (b) 

```
for (n = 5; n <= m; n -=1)
 sum = sum + n;
```
  - (c) 

```
for (n = 1; n <= 5;)
 sum = sum + n;
```
  - (d) 

```
for (n = 1; ; n = n + 1)
 sum = sum + n;
```
  - (e) 

```
for (n = 1; n < 5; n ++)
 n = n -1
```
- 4.24 What would be the output of each of the following code segments?
- (a) 

```
count = 5;
while (count -- > 0)
 printf(count);
```
  - (b) 

```
count = 5;
while (-- count > 0)
 printf(count);
```
  - (c) 

```
count = 5;
do printf(count);
while (count > 0);
```
  - (d) 

```
for (m = 10; m > 7, m -=2)
 printf(m);
```
- 4.25 Compare, in terms of their functions, the following pairs of statements:
- (a) while and do...while
  - (b) while and for
  - (c) break and goto
  - (d) break and continue
  - (e) continue and goto
- 4.26 Analyse each of the program segments that follow and determine how many times the body of each loop will be executed.

- (a) 

```
x = 5;
y = 50;
while (x <= y)
{
 x = y/x;
 —
 —
}
```
  - (b) 

```
m = 1;
do
{
 —
 —
 m = m+2;
}
while (m < 10);
```
  - (c) 

```
int i;
for (i = 0; i <= 5; i = i+2/3)
{
 —
 —
 —
}
```
  - (d) 

```
int m = 10;
int n = 7;
while (m % n >= 0)
{
 —
 m = m + 1;
 n = n + 2;
 —
}
```
- 4.27 Find errors, if any, in each of the following looping segments. Assume that all the variables have been declared and assigned values.
- (a) 

```
while (count != 10);
{
 count = 1;
 sum = sum + x;
 count = count + 1;
}
```
  - (b) 

```
name = 0;
do { name = name + 1;
 printf("My name is John\n");}
while (name = 1)
```
  - (c) 

```
do;
total = total + value;
scanf("%f", &value);
while (value != 999);
```



- (d) 

```
for (x = 1, x > 10; x = x + 1)
{
 —
 —
 —
}
```
- (e) 

```
m = 1;
n = 0;
for (; m+n < 10; ++n);
printf("Hello\n");
m = m+10
```
- (f) 

```
for (p = 10; p > 0;)
p = p - 1;
printf("%f", p);
```
- 4.28 Write a **for** statement to print each of the following sequences of integers:
- 1, 2, 4, 8, 16, 32
  - 1, 3, 9, 27, 81, 243
  - 4, -2, 0, 2, 4
  - 10, -12, -14, -18, -26, -42
- 4.29 Change the following **for** loops to **while** loops:
- ```
for (m = 1; m < 10; m = m + 1)
printf(m);
```
 - ```
for (; scanf("%d", &m) != -1;)
printf(m);
```
- 4.30 Change the **for** loops in Exercise 4.14 to **do** loops.

- 4.31 What is the output of following code?
- ```
int m = 100, n = 0;
while ( n == 0 )
{
    if ( m < 10 )
        break;
    m = m-10;
}
```
- 4.32 What is the output of the following code?
- ```
int m = 0 ;
do
{
 if (m > 10)
 continue ;
 m = m + 10 ;
} while (m < 50) ;
printf("%d", m);
```
- 4.33 What is the output of the following code?
- ```
int n = 0, m = 1 ;
do
{
    printf(m) ;
    m++ ;
}
while (m <= n) ;
```
- 4.34 What is the output of the following code?
- ```
int n = 0, m ;
for (m = 1; m <= n + 1 ; m++)
printf(m);
```
- 4.35 When do we use the following statement?
- ```
for ( ; ; )
```

Programming Exercises

- Write a program, which reads your name from the keyboard and outputs a list of ASCII codes, which represent your name.
- Write a program to do the following:
 - To output the question "Who is the inventor of C?"
 - To accept an answer.
 - To print out "Good" and then stop, if the answer is correct.
 - To output the message 'try again', if the answer is wrong.
 - To display the correct answer when the answer is wrong even at the third attempt and stop.
- Write a program to extract a portion of a character string and print the extracted string. Assume that m characters are extracted, starting with the nth character.
- Write a program which will read a text and count all occurrences of a particular word.
- Write a program which will read a string and rewrite it in the alphabetical order. For example, the word STRING should be written as GINRST.
- Write a program to replace a particular word by another word in a given string. For example, the word "PASCAL" should be replaced by "C" in the text "It is good to program in PASCAL language."

4.56 Computer Programming

- 4.7 A Maruti car dealer maintains a record of sales of various vehicles in the following form:

Vehicle type	Month of sales	Price
MARUTI-800	02/01	210000
MARUTI-DX	07/01	265000
GYPSY	04/02	315750
MARUTI-VAN	08/02	240000

Write a program to read this data into a table of strings and output the details of a particular vehicle sold during a specified period. The program should request the user to input the vehicle type and the period (starting month, ending month).

- 4.8 Write a program that reads a string from the keyboard and determines whether the string is a *palindrome* or not. (A string is a palindrome if it can be read from left and right with the same meaning. For example, Madam and Anna are palindrome strings. Ignore capitalization).
- 4.9 Write program that reads the cost of an item in the form RRRR.PP (Where RRRR denotes Rupees and PP denotes Paise) and converts the value to a string of words that expresses the numeric value in words. For example, if we input 125.75, the output should be “ONE HUNDRED TWENTY FIVE AND PAISE SEVENTY FIVE”.
- 4.10 Develop a program that will read and store the details of a list of students in the format

Roll No.	Name	Marks obtained
.....
.....
.....

and produce the following output lists:

- (a) Alphabetical list of names, roll numbers and marks obtained.
- (b) List sorted on roll numbers.
- (c) List sorted on marks (rank-wise list)
- 4.11 Write a program to read two strings and compare them using the function **strcmp()** and print a message that the first string is equal, less, or greater than the second one.
- 4.12 Write a program to read a line of text from the keyboard and print out the number of

occurrences of a given substring using the function **strstr()**.

- 4.13 Write a program that will copy *m* consecutive characters from a string *s1* beginning at position *n* into another string *s2*.
- 4.14 Write a program to create a directory of students with roll numbers. The program should display the roll number for a specified name and vice-versa.

- 4.15 Given a string

char str [] = “123456789” ;

Write a program that displays the following:

```
1
2 3 2
3 4 5 4 3
4 5 6 7 6 5 4
5 6 7 8 9 8 7 6 5
```

- 4.16 Given a number, write a program using **while** loop to reverse the digits of the number. For example, the number

12345

should be written as

54321

(**Hint:** Use modulus operator to extract the last digit and the integer division by 10 to get the *n*–1 digit number from the *n* digit number.)

- 4.17 The factorial of an integer *m* is the product of consecutive integers from 1 to *m*. That is, factorial *m* = *m*! = *m* x (*m*–1) x x 1.

Write a program that computes and prints a table of factorials for any given *m*.

- 4.18 Write a program to compute the sum of the digits of a given integer number.

- 4.19 The numbers in the sequence

1 1 2 3 5 8 13 21

are called Fibonacci numbers. Write a program using a **do....while** loop to calculate and print the first *m* Fibonacci numbers.

(**Hint:** After the first two numbers in the series, each number is the sum of the two preceding numbers.)

- 4.20 Rewrite the program of the Example 4.1 using the **for** statement.

- 4.21 Write a program to evaluate the following investment equation

$$V = P(1+r)^n$$

and print the tables which would give the value of V for various combination of the following values of P, r, and n.

P : 1000, 2000, 3000,....., 10,000

r : 0.10, 0.11, 0.12,, 0.20

n : 1, 2, 3,, 10

(**Hint:** P is the principal amount and V is the value of money at the end of n years. This equation can be recursively written as

$$V = P(1+r)$$

$$P = V$$

That is, the value of money at the end of first year becomes the principal amount for the next year and so on.)

- 4.22 Write programs to print the following outputs using **for** loops.

(a) 1
2 2
3 3 3
4 4 4 4
5 5 5 5 5

(b) * * * * *
* * * * *
* * * * *
* * * * *
* * * * *

- 4.23 Write a program to read the age of 100 persons and count the number of persons in the age group 50 to 60. Use **for** and **continue** statements.
- 4.24 Rewrite the program of case study 9.4 (plotting of two curves) using **else...if** constructs instead of **continue** statements.
- 4.25 Write a program to print a table of values of the function

$$y = \exp(-x)$$

for x varying from 0.0 to 10.0 in steps of 0.10. The table should appear as follows:

Table for Y = EXP(-X)

x	0.1	0.2	0.3	0.9
0.0					
1.0					
2.0					
3.0					
.					
.					
.					
9.0					

- 4.26 Write a program that will read a positive integer and determine and print its binary equivalent.

(**Hint:** The bits of the binary representation of an integer can be generated by repeatedly dividing the number and the successive quotients by 2 and saving the remainder, which is either 0 or 1, after each division.)

- 4.27 Write a program using **for** and **if** statement to display the capital letter S in a grid of 15 rows and 18 columns as shown below.

```

* * * * *
* * _ _ _ _ _ * *
* * * * * _ _ _ _ _ * *
* * * *
* * * *
* * * *
* * * * _ _ _ _ _ * * * *
_ _ _ _ _ _ _ _ _ _ * * * *
_ _ _ _ _ _ _ _ _ _ * * * *
_ _ _ _ _ _ _ _ _ _ * * * *
_ _ _ _ _ _ _ _ _ _ * * * *
* * * * _ _ _ _ _ _ _ _ * * * *
* * * _ _ _ _ _ _ _ _ _ * * * *
* * _ _ _ _ _ _ _ _ _ _ * * * *

```

- 4.28 Write a program to compute the value of Euler's number e, that is used as the base of natural logarithms. Use the following formula.

$$e = 1 + 1/1! + 1/2! + 1/3! + \dots + 1/n!$$

Use a suitable loop construct. The loop must terminate when the difference between two successive values of e is less than 0.00001.

- 4.29 Write programs to evaluate the following functions to 0.0001% accuracy.

(a) $\sin x = x - x^3/3! + x^5/5! - x^7/7! + \dots$

(b) $\cos x = 1 - x^2/2! + x^4/4! - x^6/6! + \dots$

(c) $SUM = 1 + (1/2)^2 + (1/3)^3 + (1/4)^4 + \dots$

- 4.30 The present value (popularly known as book value) of an item is given by the relationship.

$$P = c(1-d)^n$$

where c = original cost

d = rate of depreciation (per year)

n = number of years

p = present value after y years.

4.58 Computer Programming

If P is considered the scrap value at the end of useful life of the item, write a program to compute the useful life in years given the original cost, depreciation rate, and the scrap value.

The program should request the user to input the data interactively.

- 4.31 Write a program to print a square of size 5 by using the character **S** as shown below:

(a)	S S S S S	(b)	S S S S S
	S S S S S		S S S S S
	S S S S S		S S S S S
	S S S S S		S S S S S
	S S S S S		S S S S S

- 4.32 Write a program to graph the function

$$y = \sin(x)$$

in the interval 0 to 180 degrees in steps of 15 degrees. Use the concepts discussed in the Case Study 4 in Chapter 7.

- 4.33 Write a program to print all integers that are **not divisible** by either 2 or 3 and lie between

1 and 100. Program should also account the number of such integers and print the result.

- 4.34 Modify the program of Exercise 4.16 to print the character **O** instead of **S** at the center of the square as shown below.

```
S S S S S
S S S S S
S S O S S
S S S S S
S S S S S
```

- 4.35 Given a set of 10 two-digit integers containing both positive and negative values, write a program using **for** loop to compute the sum of all positive values and print the sum and the number of values added. The program should use **scanf** to read the values and terminate when the sum exceeds 999. Do not use **goto** statement.

Key Terms

- **String:** It is a sequence of characters that is treated as a single data item.
- **strcat:** It is a function used to join two strings together.
- **strcmp:** It is a function used to compare two strings passed as arguments. It generates a value of 0 if they are equal.
- **strcpy:** It is a function used to copy one string into another.
- **strstr:** It is a two-parameter function that is used to locate a sub-string in a string.
- **Program loop:** It consists of two segments, one known as the body of the loop and the other known as the control statement. On the basis of the control statement, the body of the loop is executed repeatedly.
- **Control statement:** It tests certain conditions and then directs the repeated execution of the statements contained in the body of the loop.
- **Infinite loop:** It is a permanent loop in which the body is executed over and over again.
- **Counter-controlled loop:** It is used when it is certain how many times the loop will be executed. It is also known as definite repetition loop.
- **Sentinel-controlled loop:** It is used when the number of repetitions is not known before the loop begins executing. It is also known as indefinite repetition loop.
- **While statement:** It is an entry-controlled loop statement in which the test-condition is evaluated first and if the condition is true, then the body of the loop is executed.
- **Do statement:** It executes the body of the loop before the test is performed.
- **For statement:** It is another entry-controlled loop that provides initialization, testing and

incrementation of control variable at one location (in the for statement itself).

- **Continue statement:** It causes the loop to be continued with the next iteration after skipping further statements in the current iteration.
- **Break statement:** It causes the loop to be terminated in which it is enclosed.

UNIT 5

Functions—Modular Programming

5.1 INTRODUCTION

We have mentioned earlier that one of the strengths of C language is C functions. They are easy to define and use. We have used functions in every program that we have discussed so far. However, they have been primarily limited to the three functions, namely, **main**, **printf**, and **scanf**. In this chapter, we shall consider in detail the following:

- How a function is designed?
- How a function is integrated into a program?
- How two or more functions are put together? and
- How they communicate with one another?

C functions can be classified into two categories, namely, *library* functions and *user-defined* functions. **main** is an example of user-defined functions. **printf** and **scanf** belong to the category of library functions. We have also used other library functions such as **sqrt**, **cos**, **strcat**, etc. The main distinction between these two categories is that library functions are not required to be written by us whereas a user-defined function has to be developed by the user at the time of writing a program. However, a user-defined function can later become a part of the C program library. In fact, this is one of the strengths of C language.

5.2 NEED FOR USER-DEFINED FUNCTIONS

As pointed out earlier, **main** is a specially recognized function in C. Every program must have a **main** function to indicate where the program has to begin its execution. While it is possible to code any program utilizing only **main** function, it leads to a number of problems. The program may become too large and complex and as a result the task of debugging, testing, and maintaining becomes difficult. If a program is divided into functional parts, then each part may be independently coded and later combined into a single unit. These independently coded programs are called *subprograms* that are much easier to understand, debug, and test. In C, such subprograms are referred to as ‘**functions**’.

There are times when certain type of operations or calculations are repeated at many points throughout a program. For instance, we might use the factorial of a number at several points in the program. In such situations, we may repeat the program statements wherever they are needed. Another approach is to design a function that can be called and used whenever required. This saves both time and space.

This “division” approach clearly results in a number of advantages.

1. It facilitates top-down modular programming as shown in Fig. 5.1. In this programming style, the high level logic of the overall problem is solved first while the details of each lower-level function are addressed later.

5.2 Computer Programming

2. The length of a source program can be reduced by using functions at appropriate places. This factor is particularly critical with microcomputers where memory space is limited.
3. It is easy to locate and isolate a faulty function for further investigations.
4. A function may be used by many other programs. This means that a C programmer can build on what others have already done, instead of starting all over again from scratch.

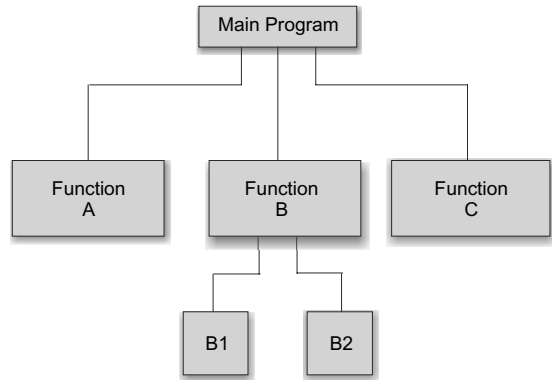


Fig. 5.1 Top—down modular programming using functions

5.3 A MULTI-FUNCTION PROGRAM

A function is a self-contained block of code that performs a particular task. Once a function has been designed and packed, it can be treated as a 'black box' that takes some data from the main program and returns a value. The inner details of operation are invisible to the rest of the program. All that the program knows about a function is: What goes in and what comes out. Every C program can be designed using a collection of these black boxes known as *functions*.

Consider a set of statements as shown below:

```
void printline(void)
{
    int i;
    for (i=1; i<40; i++)
        printf("-");
    printf("\n");
}
```

The above set of statements defines a function called **printline**, which could print a line of 39-character length. This function can be used in a program as follows:

```
void printline(void); /* declaration */
main( )
{
    printline( );
    printf("This illustrates the use of C functions\n");
    printline();
}
void printline(void)
{
    int i;
    for(i=1; i<40; i++)
        printf("-");
    printf("\n");
}
```


This program will print the following output:

This illustrates the use of C functions

The above program contains two user-defined functions:

main() function
printline() function

As we know, the program execution always begins with the **main** function. During execution of the **main**, the first statement encountered is

printline ();

which indicates that the function **printline** is to be executed. At this point, the program control is transferred to the function **printline**. After executing the **printline** function, which outputs a line of 39 character length, the control is transferred back to the **main**. Now, the execution continues at the point where the function call was executed. After executing the **printf** statement, the control is again transferred to the **printline** function for printing the line once more.

The **main** function calls the user-defined **printline** function two times and the library function **printf** once. We may notice that the **printline** function itself calls the library function **printf** 39 times repeatedly.

Any function can call any other function. In fact, it can call itself. A ‘called function’ can also call another function. A function can be called more than once. In fact, this is one of the main features of using functions. Figure 5.2 illustrates the flow of control in a multi-function program.

Except the starting point, there are no other predetermined relationships, rules of precedence, or hierarchies among the functions that make up a complete program. The functions can be placed in any order. A called function can be placed either before or after the calling function. However, it is the usual practice to put all the called functions at the end. See the box “Modular Programming”

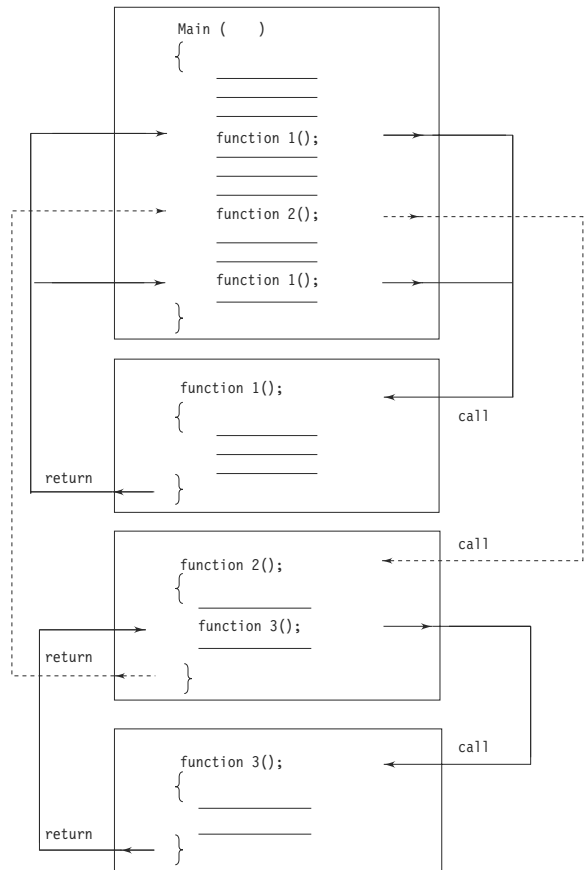


Fig. 5.2 Flow of control in a multi-function program

Modular Programming

Modular programming is a strategy applied to the design and development of software systems. It is defined as organizing a large program into small, independent program segments called *modules* that are separately named and individually callable *program units*. These modules are carefully integrated to become a software system that satisfies the system requirements. It is basically a “divide-and-conquer” approach to problem solving.

(Contd.)

5.4 Computer Programming

Modules are identified and designed such that they can be organized into a top-down hierarchical structure (similar to an organization chart). In C, each module refers to a function that is responsible for a single task.

Some characteristics of modular programming are:

1. Each module should do only one thing.
2. Communication between modules is allowed only by a calling module.
3. A module can be called by one and only one higher module.
4. No communication can take place directly between modules that do not have calling-called relationship.
5. All modules are designed as *single-entry, single-exit* systems using control structures.

5.4 ELEMENTS OF USER-DEFINED FUNCTIONS

We have discussed and used a variety of data types and variables in our programs so far. However, declaration and use of these variables were primarily done inside the **main** function. As we mentioned in Chapter 4, functions are classified as one of the derived data types in C. We can therefore define functions and use them like any other variables in C programs. It is therefore not a surprise to note that there exist some similarities between functions and variables in C.

- Both function names and variable names are considered identifiers and therefore they must adhere to the rules for identifiers.
- Like variables, functions have types (such as `int`) associated with them.
- Like variables, function names and their types must be declared and defined before they are used in a program.

In order to make use of a user-defined function, we need to establish three elements that are related to functions.

1. Function definition.
2. Function call.
3. Function declaration.

The *function definition* is an independent program module that is specially written to implement the requirements of the function. In order to use this function we need to invoke it at a required place in the program. This is known as the *function call*. The program (or a function) that calls the function is referred to as the *calling program* or *calling function*. The calling program should declare any function (like declaration of a variable) that is to be used later in the program. This is known as the *function declaration* or *function prototype*.

5.5 DEFINITION OF FUNCTIONS

A *function definition*, also known as *function implementation* shall include the following elements;

1. function name;
2. function type;
3. list of parameters;
4. local variable declarations;
5. function statements; and
6. a return statement.

All the six elements are grouped into two parts, namely,

- function header (First three elements); and
- function body (Second three elements).

A general format of a function definition to implement these two parts is given below:

```
function_type function_name(parameter list)
{
    local variable declaration;
    executable statement1;
    executable statement2;
    . . . . .
    . . . . .
    return statement;
}
```

The first line **function_type function_name(parameter list)** is known as the *function header* and the statements within the opening and closing braces constitute the *function body*, which is a compound statement.

Function Header

The function header consists of three parts: the function type (also known as *return type*), the function name and the *formal* parameter list. Note that a semicolon is not used at the end of the function header.

Name and Type

The *function type* specifies the type of value (*like float or double*) that the function is expected to return to the program calling the function. If the return type is not explicitly specified, C will assume that it is an integer type. If the function is not returning anything, then we need to specify the return type as **void**. Remember, **void** is one of the fundamental data types in C. It is a good programming practice to code explicitly the return type, even when it is an integer. The value returned is the output produced by the function.

The *function name* is any valid C identifier and therefore must follow the same rules of formation as other variable names in C. The name should be appropriate to the task performed by the function. However, care must be exercised to avoid duplicating library routine names or operating system commands.

Formal Parameter List

The *parameter list* declares the variables that will receive the data sent by the calling program. They serve as input data to the function to carry out the specified task. Since they represent actual input values, they are often referred to as *formal* parameters. These parameters can also be used to send values to the calling programs. This aspect will be covered later when we discuss more about functions. The parameters are also known as *arguments*.

The parameter list contains declaration of variables separated by commas and surrounded by parentheses. Examples:

```
float quadratic (int a, int b, int c) { . . . }
double power (double x, int n) { . . . }
float mul (float x, float y) { . . . }
int sum (int a, int b) { . . . }
```

Remember, there is no semicolon after the closing parenthesis. Note that the declaration of parameter variables cannot be combined. That is, **int sum (int a,b)** is illegal.

A function need not always receive values from the calling program. In such cases, functions have no formal parameters. To indicate that the parameter list is empty, we use the keyword **void** between the parentheses as in

```
void printline (void)
{
    . . . .
}
```

5.6 Computer Programming

This function neither receives any input values nor returns back any value. Many compilers accept an empty set of parentheses, without specifying anything as in

```
void printline ( )
```

But, it is a good programming style to use **void** to indicate a null parameter list.

Function Body

The *function body* contains the declarations and statements necessary for performing the required task. The body enclosed in braces, contains three parts, in the order given below:

1. Local declarations that specify the variables needed by the function.
2. Function statements that perform the task of the function.
3. A **return** statement that returns the value evaluated by the function.

If a function does not return any value (like the **printline** function), we can omit the **return** statement. However, note that its return type should be specified as **void**. Again, it is nice to have a return statement even for **void** functions.

Some examples of typical function definitions are:

```
(a) float mul (float x, float y)
    {
        float result;          /* local variable */
        result = x * y;        /* computes the product */
        return (result);       /* returns the result */
    }

(b) void sum (int a, int b)
    {
        printf ("sum = %s", a + b); /* no local variables */
        return;                  /* optional */
    }

(c) void display (void)
    {
        /* no local variables */
        printf ("No type, no parameters");
        /* no return statement */
    }
```



NOTE:

1. When a function reaches its return statement, the control is transferred back to the calling program. In the absence of a return statement, the closing brace acts as a void return.
2. A local variable is a variable that is defined inside a function and used without having any role in the communication between functions.

5.6 RETURN VALUES AND THEIR TYPES

As pointed out earlier, a function may or may not send back any value to the calling function. If it does, it is done through the **return** statement. While it is possible to pass to the called function any number of values, the called function can only return *one value* per call, at the most.

The **return** statement can take one of the following forms:

```
return;
or
return(expression);
```

The first, the ‘plain’ **return** does not return any value; it acts much as the closing brace of the function. When a **return** is encountered, the control is immediately passed back to the calling function. An example of the use of a simple **return** is as follows:

```
if(error)
    return;
```



NOTE: In C99, if a function is specified as returning a value, the return must have value associated with it.

The second form of **return** with an expression returns the value of the expression. For example, the function

```
int mul (int x, int y)
{
    int p;
    p = x*y;
    return(p);
}
```

returns the value of **p** which is the product of the values of **x** and **y**. The last two statements can be combined into one statement as follows:

```
return (x*y);
```

A function may have more than one **return** statements. This situation arises when the value returned is based on certain conditions. For example:

```
if( x <= 0 )
    return(0);
else
    return(1);
```

What type of data does a function return? All functions by default return **int** type data. But what happens if a function must return some other type? We can force a function to return a particular type of data by using a *type specifier* in the function header as discussed earlier.

When a value is returned, it is automatically cast to the function’s type. In functions that do computations using **doubles**, yet return **ints**, the returned value will be truncated to an integer. For instance, the function

```
int product (void)
{
    return (2.5 * 3.0);
}
```

will return the value 7, only the integer part of the result.

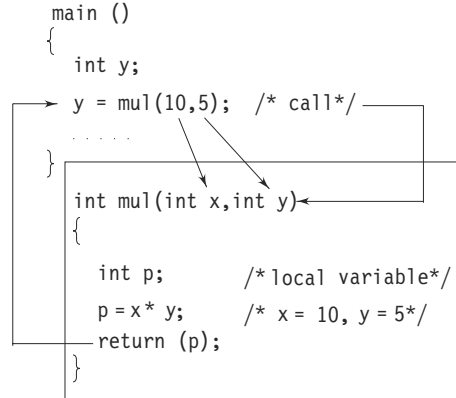
5.7 FUNCTION CALLS

A function can be called by simply using the function name followed by a list of *actual parameters* (or arguments), if any, enclosed in parentheses. Example:

```
main( )
{
    int y;
    y = mul(10,5);      /* Function call */
    printf("%d\n", y);
}
```

5.8 Computer Programming

When the compiler encounters a function call, the control is transferred to the function **mul()**. This function is then executed line by line as described and a value is returned when a **return** statement is encountered. This value is assigned to **y**. This is illustrated below:



The function call sends two integer values 10 and 5 to the function.

int mul(int x, int y)

which are assigned to **x** and **y** respectively. The function computes the product **x** and **y**, assigns the result to the local variable **p**, and then returns the value 25 to the **main** where it is assigned to **y** again.

There are many different ways to call a function. Listed below are some of the ways the function **mul** can be invoked.

```
mul (10, 5)
mul (m, 5)
mul (10, n)
mul (m, n)
mul (m + 5, 10)
mul (10, mul(m,n))
mul (expression1, expression2)
```

Note that the sixth call uses its own call as its one of the parameters. When we use expressions, they should be evaluated to single values that can be passed as actual parameters.

A function which returns a value can be used in expressions like any other variable. Each of the following statements is valid:

```
printf("%d\n", mul(p,q));
y = mul(p,q) / (p+q);
if (mul(m,n)>total) printf("large");
```

However, a function cannot be used on the right side of an assignment statement. For instance,

```
mul(a,b) = 15;
```

is invalid.

A function that does not return any value may not be used in expressions; but can be called in to perform certain tasks specified in the function. The function **printline()** discussed in Section 5.3 belongs to this category. Such functions may be called in by simply stating their names as independent statements.

Example:

```
main( )
{
    println( );
}
```

Note the presence of a semicolon at the end.

Function Call

A function call is a postfix expression. The operator (.) is at a very high level of precedence. (See Table 4.8) Therefore, when a function call is used as a part of an expression, it will be evaluated first, unless parentheses are used to change the order of precedence.

In a function call, the function name is the operand and the parentheses set (.) which contains the *actual parameters* is the operator. The actual parameters must match the function's formal parameters in type, order and number. Multiple actual parameters must be separated by commas.



NOTE:

1. If the actual parameters are more than the formal parameters, the extra actual arguments will be discarded.
2. On the other hand, if the actuals are less than the formals, the unmatched formal arguments will be initialized to some garbage.
3. Any mismatch in data types may also result in some garbage values.

5.8 FUNCTION DECLARATION

Like variables, all functions in a C program must be declared, before they are invoked. A *function declaration* (also known as *function prototype*) consists of four parts.

- Function type (return type).
- Function name.
- Parameter list.
- Terminating semicolon.

They are coded in the following format:

```
Function-type function-name (parameter list);
```

This is very similar to the function header line except the terminating semicolon. For example, **mul** function defined in the previous section will be declared as:

```
int mul (int m, int n); /* Function prototype */
```

Points to note:

1. The parameter list must be separated by commas.
2. The parameter names do not need to be the same in the prototype declaration and the function definition.
3. The types must match the types of parameters in the function definition, in number and order.
4. Use of parameter names in the declaration is optional.
5. If the function has no formal parameters, the list is written as (void).
6. The return type is optional, when the function returns **int** type data.
7. The retype must be **void** if no value is returned.
8. When the declared types do not match with the types in the function definition, compiler will produce an error.

5.10 Computer Programming

Equally acceptable forms of declaration of **mul** function are:

```
int mul (int, int);  
mul (int a, int b);  
mul (int, int);
```

When a function does not take any parameters and does not return any value, its prototype is written as:

```
void display (void);
```

A prototype declaration may be placed in two places in a program.

1. Above all the functions (including **main**).
2. Inside a function definition.

When we place the declaration above all the functions (in the global declaration section), the prototype is referred to as a *global prototype*. Such declarations are available for all the functions in the program.

When we place it in a function definition (in the local declaration section), the prototype is called a *local prototype*. Such declarations are primarily used by the functions containing them.

The place of declaration of a function defines a region in a program in which the function may be used by other functions. This region is known as the *scope* of the function. (Scope is discussed later in this chapter.) It is a good programming style to declare prototypes in the global declaration section before **main**. It adds flexibility, provides an excellent quick reference to the functions used in the program, and enhances documentation.

Prototypes: Yes or No

Prototype declarations are not essential. If a function has not been declared before it is used, C will assume that its details available at the time of linking. Since the prototype is not available, C will assume that the return type is an integer and that the types of parameters match the formal definitions. If these assumptions are wrong, the linker will fail and we will have to change the program. The moral is that we must always include prototype declarations, preferably in global declaration section.

Parameters Everywhere!

Parameters (also known as arguments) are used in three places:

1. in declaration (prototypes),
2. in function call, and
3. in function definition.

The parameters used in prototypes and function definitions are called *formal parameters* and those used in function calls are called *actual parameters*. Actual parameters used in a calling statement may be simple constants, variables or expressions.

The formal and actual parameters must match exactly in type, order and number. Their names, however, do not need to match.

5.9 CATEGORY OF FUNCTIONS

A function, depending on whether arguments are present or not and whether a value is returned or not, may belong to one of the following categories:

- | | |
|-------------|---|
| Category 1: | Functions with no arguments and no return values. |
| Category 2: | Functions with arguments and no return values. |
| Category 3: | Functions with arguments and one return value. |
| Category 4: | Functions with no arguments but return a value. |
| Category 5: | Functions that return multiple values. |

In the sections to follow, we shall discuss these categories with examples. Note that, from now on, we shall use the term arguments (rather than parameters) more frequently:

5.10 NO ARGUMENTS AND NO RETURN VALUES

When a function has no arguments, it does not receive any data from the calling function. Similarly, when it does not return a value, the calling function does not receive any data from the called function. In effect, there is no data transfer between the calling function and the called function. This is depicted in Fig. 5.3. The dotted lines indicate that there is only a transfer of control but not data.

As pointed out earlier, a function that does not return any value cannot be used in an expression. It can only be used as an independent statement.

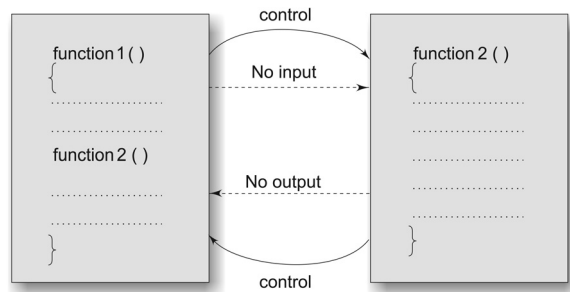


Fig. 5.3 No data communication between functions

EXAMPLE 5.1 Write a program with multiple functions that do not communicate any data between them.

A program with three user-defined functions is given in Fig. 5.4. **main** is the calling function that calls **printline** and **value** functions. Since both the called functions contain no arguments, there are no argument declarations. The **printline** function, when encountered, prints a line with a length of 35 characters as prescribed in the function. The **value** function calculates the value of principal amount after a certain period of years and prints the results. The following equation is evaluated repeatedly:

$$\text{value} = \text{principal}(1 + \text{interest-rate})$$

```

Program
/* Function declaration */
void printline (void);
void value (void);

main()
{
    printline();
    value();
    printline();
}

/* Function1: printline( ) */
void printline(void) /* contains no arguments */
{
    int i ;
    for(i=1; i <= 35; i++)
        printf("%c", '-');
    printf("\n");
}
  
```

(Contd.)

5.12 Computer Programming

```
/* Function2: value( ) */
void value(void) /* contains no arguments */
{
    int year, period;
    float inrate, sum, principal;
    printf("Principal amount?");
    scanf("%f", &principal);
    printf("Interest rate? ");
    scanf("%f", &inrate);
    printf("Period? ");
    scanf("%d", &period);

    sum = principal;
    year = 1;
    while(year <= period)
    {
        sum = sum *(1+inrate);
        year = year +1;
    }
    printf("\n%8.2f %5.2f %5d %12.2f\n",
        principal,inrate,period,sum);
}
```

Output

```
-----
Principal amount?      5000
Interest rate?         0.12
Period?                5

5000.00 0.12          5 8811.71
-----
```

Fig. 5.4 Functions with no arguments and no return values

It is important to note that the function **value** receives its data directly from the terminal. The input data include principal amount, interest rate and the period for which the final value is to be calculated. The **while** loop calculates the final value and the results are printed by the library function **printf**. When the closing brace of **value()** is reached, the control is transferred back to the calling function **main**. Since everything is done by the value itself there is in fact nothing left to be sent back to the called function. Return types of both **printrline** and **value** are declared as **void**.

Note that no **return** statement is employed. When there is nothing to be returned, the **return** statement is optional. The closing brace of the function signals the end of execution of the function, thus returning the control, back to the calling function.

5.11 ARGUMENTS BUT NO RETURN VALUES

In Fig. 5.4 the **main** function has no control over the way the functions receive input data. For example, the function **printrline** will print the same line each time it is called. Same is the case with the function **value**. We could make the calling function to read data from the terminal and pass it on to the called function. This approach seems to be wiser because the calling function can check for the validity of data, if necessary, before it is handed over to the called function.

The nature of data communication between the *calling function* and the *called function* with arguments but no return value is shown in Fig. 5.5.

We shall modify the definitions of both the called functions to include arguments as follows:

```
void printline(char ch)
void value(float p, float r, int n)
```

The arguments **ch**, **p**, **r**, and **n** are called the *formal arguments*. The calling function can now send values to these arguments using function calls containing appropriate arguments. For example, the function call

value(500,0.12,5)

would send the values 500, 0.12 and 5 to the function

```
void value( float p, float r, int n)
```

and assign 500 to **p**, 0.12 to **r** and 5 to **n**. The values 500, 0.12 and 5 are the *actual arguments*, which become the values of the *formal arguments* inside the called function.

The *actual* and *formal* arguments should match in number, type, and order. The values of actual arguments are assigned to the formal arguments on a *one to one* basis, starting with the first argument as shown in Fig. 5.6.

We should ensure that the function call has matching arguments. In case, the actual arguments are more than the formal arguments ($m > n$), the extra actual arguments are discarded. On the other hand, if the actual arguments are less than the formal arguments, the unmatched formal arguments are initialized to some garbage values. Any mismatch in data type may also result in passing of garbage values. Remember, no error message will be generated.

While the formal arguments must be valid variable names, the actual arguments may be variable names, expressions, or constants. The variables used in actual arguments must be assigned values before the function call is made.

Remember that, when a function call is made, only a *copy of the values of actual arguments is passed into the called function*. What occurs inside the function will have no effect on the variables used in the actual argument list.

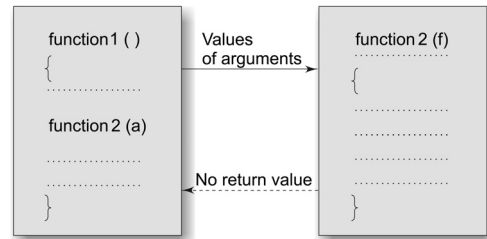


Fig. 5.5 One-way data communication

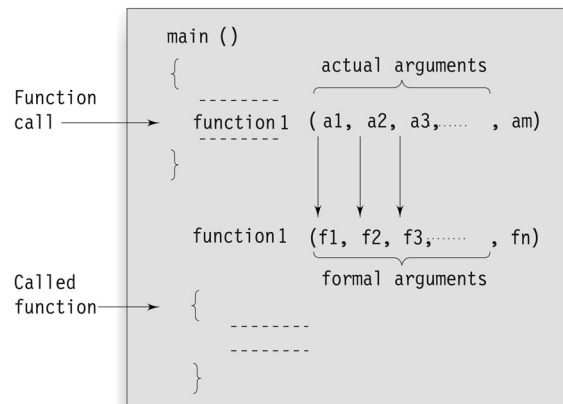


Fig. 5.6 Arguments matching between the function call and the called function

EXAMPLE 5.2 Modify the program of Example 5.1 to include the arguments in the function calls.

The modified program with function arguments is presented in Fig. 5.7. Most of the program is identical to the program in Fig. 5.4. The input prompt and **scanf** assignment statement have been moved from **value** function to **main**. The variables **principal**, **inrate**, and **period** are declared in **main** because they are used in main to receive data. The function call

```
value(principal, inrate, period);
```

passes information it contains to the function **value**.

5.14 Computer Programming

The function header of **value** has three formal arguments **p,r**, and **n** which correspond to the actual arguments in the function call, namely, **principal**, **inrate**, and **period**. On execution of the function call, the values of the actual arguments are assigned to the corresponding formal arguments. In fact, the following assignments are accomplished across the function boundaries:

```
p = principal;  
r = inrate;  
n = period;
```

Program

```

/* prototypes */
void printline (char c);
void value (float, float, int);

main( )
{
    float principal, inrate;
    int period;
    printf("Enter principal amount, interest");
    printf(" rate, and period \n");
    scanf("%f %f %d",&principal, &inrate, &period);
    printline('Z');
    value(principal,inrate,period);
    printline('C');
}

void printline(char ch)
{
    int i ;
    for(i=1; i <= 52; i++)
        printf("%c",ch);
    printf("\n");
}

void value(float p, float r, int n)
{
    int year ;
    float sum ;
    sum = p ;
    year = 1;
    while(year <= n)
    {
        sum = sum * (1+r);
        year = year +1;
    }

    printf("%f\t%f\t%d\t%f\n",p,r,n,sum);
}

```

Output

```
Enter principal amount, interest rate, and period  
5000 0.12 5  
ZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZ  
5000.000000 0.120000 5 8811.708984  
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
```

Fig. 5.7 *Functions with arguments but no return values*

The variables declared inside a function are known as *local variables* and therefore their values are local to the function and cannot be accessed by any other function. We shall discuss more about this later in the chapter.

The function **value** calculates the final amount for a given period and prints the results as before. Control is transferred back on reaching the closing brace of the function. Note that the function does not return any value.

The function **prntline** is called twice. The first call passes the character 'Z', while the second passes the character 'C' to the function. These are assigned to the formal argument **ch** for printing lines (see the output).

Variable Number of Arguments

Some functions have a variable number of arguments and data types which cannot be known at compile time. The **printf** and **scanf** functions are typical examples. The ANSI standard proposes new symbol called the *ellipsis* to handle such functions. The *ellipsis* consists of three periods (...) and used as shown below:

double area(float d,...)

Both the function declaration and definition should use ellipsis to indicate that the arguments are arbitrary both in number and type.

5.12 ARGUMENTS WITH RETURN VALUES

The function **value** in Fig. 5.7 receives data from the calling function through arguments, but does not send back any value. Rather, it displays the results of calculations at the terminal. However, we may not always wish to have the result of a function displayed. We may use it in the calling function for further processing. Moreover, to assure a high degree of portability between programs, a function should generally be coded without involving any I/O operations. For example, different programs may require different output formats for display of results. These shortcomings can be overcome by handing over the result of a function to its calling function where the returned value can be used as required by the program.

A self-contained and independent function should behave like a 'black box' that receives a predefined form of input and outputs a desired value. Such functions will have two-way data communication as shown in Fig. 5.8.

We shall modify the program in Fig. 5.7 to illustrate the use of two-way data communication between the *calling* and the *called functions*.

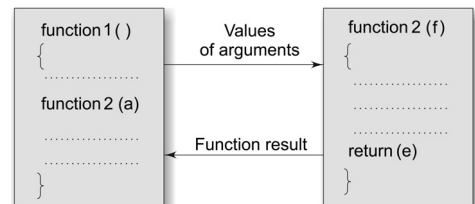


Fig. 5.8 Two-way data communication between functions

EXAMPLE 5.3 In the program presented in Fig. 5.7 modify the function **value**, to return the final amount calculated to the main, which will display the required output at the terminal. Also extend the versatility of the function **prntline** by having it to take the length of the line as an argument.

The modified program with the proposed changes is presented in Fig. 5.9. One major change is the movement of the **printf** statement from **value** to **main**.

Program

```
void prntline (char ch, int len);
value (float, float, int);
```

(Contd.)

```

main( )
{
    float principal, inrate, amount;
    int period;
    printf("Enter principal amount, interest");
    printf("rate, and period\n");
    scanf("%f %f %d", &principal, &inrate, &period);
    printline ('*', 52);
    amount = value (principal, inrate, period);
    printf("\n%f\t%f\t%d\t%f\n",principal,
           inrate,period,amount);
    printline('=' ,52);
}

void printline(char ch, int len)
{
    int i;
    for (i=1;i<=len;i++) printf("%c",ch);
    printf("\n");
}

value(float p, float r, int n) /* default return type */
{
    int year;
    float sum;
    sum = p; year = 1;
    while(year <=n)
    {
        sum = sum * (1+r);
        year = year +1;
    }
    return(sum); /* returns int part of sum */
}

```

Output

```

Enter principal amount, interest rate, and period
5000      0.12 5
*****
5000.000000    0.1200000    5    8811.000000
= = = = =

```

Fig. 5.9 Functions with arguments and return values

The calculated value is passed on to **main** through statement:

```
return(sum);
```

Since, by default, the return type of **value** function is **int**, the 'integer' value of **sum** at this point is returned to **main** and assigned to the variable **amount** by the functional call

```
amount = value (principal, inrate, period);
```

The following events occur, in order, when the above function call is executed:

1. The function call transfers the control along with copies of the values of the actual arguments to the function **value** where the formal arguments **p**, **r**, and **n** are assigned the actual values of **principal**, **inrate** and **period** respectively.

2. The called function **value** is executed line by line in a normal fashion until the **return(sum);** statement is encountered. At this point, the integer value of **sum** is passed back to the function-call in the **main** and the following indirect assignment occurs:

```
value(principal, inrate, period) = sum;
```

3. The calling statement is executed normally and the returned value is thus assigned to **amount**, a **float** variable.
4. Since **amount** is a **float** variable, the returned integer part of sum is converted to floating-point value. See the output.

Another important change is the inclusion of second argument to **printline** function to receive the value of length of the line from the calling function. Thus, the function call

```
printline('*', 52);
```

will transfer the control to the function **printline** and assign the following values to the formal arguments **ch**, and **len**;

```
ch = '*';
len = 52;
```

5.12.1 Returning Float Values

We mentioned earlier that a C function returns a value of the type **int** as the default case when no other type is specified explicitly. For example, the function **value** of Example 5.3 does all calculations using **floats** but the return statement

```
return(sum);
```

returns only the integer part of **sum**. This is due to the absence of the *type-specifier* in the function header. In this case, we can accept the integer value of **sum** because the truncated decimal part is insignificant compared to the integer part. However, there will be times when we may find it necessary to receive the **float** or **double** type of data. For example, a function that calculates the mean or standard deviation of a set of values should return the function value in either **float** or **double**.

In all such cases, we must explicitly specify the *return type* in both the function definition and the prototype declaration.

If we have a mismatch between the type of data that the called function returns and the type of data that the calling function expects, we will have unpredictable results. We must, therefore, be very careful to make sure that both types are compatible.

EXAMPLE 5.4 Write a function **power** that computes x raised to the power y for integers x and y and returns double-type value.

Figure 5.10 shows a **power** function that returns a **double**. The prototype declaration

```
double power(int, int);
```

appears in **main**, before **power** is called.

```
Program
main( )
{
  int x,y; /*input data */
```

(Contd.)

5.18 Computer Programming

```
double power(int, int); /* prototype declaration*/
printf("Enter x,y:");
scanf("%d %d", &x,&y);
printf("%d to power %d is %f\n", x,y,power (x,y));
}
double power (int x, int y);
{
    double p;
    p = 1.0 ; /* x to power zero */
    if(y >=0)
        while(y—) /* computes positive powers */
            p *= x;
    else
        while (y++) /* computes negative powers */
            p /= x;
    return(p); /* returns double type */
}
```

Output

```
Enter x,y:16 2
16 to power 2 is 256.000000
Enter x,y:16 -2
16 to power -2 is 0.003906
```

Fig. 5.10 Power functions: Illustration of return of float values

Another way to guarantee that **power**'s type is declared before it is called in **main** is to define the **power** function before we define **main**. **Power**'s type is then known from its definition, so we no longer need its type declaration in **main**.

5.13 NO ARGUMENTS BUT RETURNS A VALUE

There could be occasions where we may need to design functions that may not take any arguments but returns a value to the calling function. A typical example is the **getchar** function declared in the header file **<stdio.h>**. We have used this function earlier in a number of places. The **getchar** function has no parameters but it returns an integer type data that represents a character.

We can design similar functions and use in our programs. Example:

```
int get_number(void);
main
{
    int m = get_number( );
    printf("%d",m);
}
int get_number(void)
{
    int number;
    scanf("%d", &number);
    return(number);
}
```


5.14 FUNCTIONS THAT RETURN MULTIPLE VALUES

Up till now, we have illustrated functions that return just one value using a return statement. That is because, a return statement can return only one value. Suppose, however, that we want to get more information from a function. We can achieve this in C using the arguments not only to receive information but also to send back information to the calling function. The arguments that are used to “send out” information are called *output parameters*.

The mechanism of sending back information through arguments is achieved using what are known as the *address operator (&)* and *indirection operator (*)*. Let us consider an example to illustrate this.

```
void mathoperation (int x, int y, int *s, int *d);
main( )
{
    int x = 20, y = 10, s, d;
    mathoperation(x,y, &s, &d);

    printf("s=%d\n d=%d\n", s,d);
}
void mathoperation (int a, int b, int *sum, int *diff)
{
    *sum = a+b;
    *diff = a-b;
}
```

The actual arguments **x** and **y** are input arguments, **s** and **d** are output arguments. In the function call, while we pass the actual values of **x** and **y** to the function, we pass the addresses of locations where the values of **s** and **d** are stored in the memory. (That is why, the operator **&** is called the address operator.) When the function is called the following assignments occur:

value of	x to a
value of	y to b
address of	s to sum
address of	d to diff

Note that indirection operator ***** in the declaration of **sum** and **diff** in the header indicates these variables are to store addresses, not actual values of variables. Now, the variables **sum** and **diff** point to the memory locations of **s** and **d** respectively.

(The operator ***** is known as indirection operator because it gives an indirect reference to a variable through its address.)

In the body of the function, we have two statements:

```
* sum = a+b;
* diff = a-b;
```

The first one adds the values **a** and **b** and the result is stored in the memory location pointed to by **sum**. Remember, this memory location is the same as the memory location of **s**. Therefore, the value stored in the location pointed to by **sum** is the value of **s**.

Similarly, the value of **a–b** is stored in the location pointed to by **diff**, which is the same as the location **d**. After the function call is implemented, the value of **s** is **a+b** and the value of **d** is **a–b**. Output will be:

```
s = 30
d = 10
```

5.20 Computer Programming

The variables ***sum** and ***diff** are known as *pointers* and **sum** and **diff** as *pointer variables*. Since they are declared as **int**, they can point to locations of **int** type data.

The use of pointer variables as actual parameters for communicating data between functions is called “pass by pointers” or “call by address or reference”. Pointers and their applications are discussed in detail in Chapter 6.

Rules for Pass by Pointers

1. The types of the actual and formal arguments must be same.
2. The actual arguments (in the function call) must be the addresses of variables that are local to the calling function.
3. The formal arguments in the function header must be prefixed by the indirection operator *****.
4. In the prototype, the arguments must be prefixed by the symbol *****.
5. To access the value of an actual argument in the called function, we must use the corresponding formal argument prefixed with the indirection operator *****.

5.15 NESTING OF FUNCTIONS

C permits nesting of functions freely. **main** can call **function1**, which calls **function2**, which calls **function3**, and so on. There is in principle no limit as to how deeply functions can be nested.

Consider the following program:

```
float ratio (int x, int y, int z);
int difference (int x, int y);
main( )
{
    int a, b, c;
    scanf("%d %d %d", &a, &b, &c);
    printf("%f \n", ratio(a,b,c));
}

float ratio(int x, int y, int z)
{
    if(difference(y, z))
        return(x/(y-z));
    else
        return(0.0);
}

int difference(int p, int q)
{
    if(p != q)
        return (1);
    else
        return(0);
}
```

The above program calculates the ratio

$$\frac{a}{b - c}$$

and prints the result. We have the following three functions:

```
main()
ratio()
difference()
```

main reads the values of *a*, *b* and *c* and calls the function **ratio** to calculate the value $a/(b-c)$. This ratio cannot be evaluated if $(b-c) = 0$. Therefore, **ratio** calls another function **difference** to test whether the difference $(b-c)$ is zero or not; **difference** returns 1, if *b* is not equal to *c*; otherwise returns zero to the function **ratio**. In turn, **ratio** calculates the value $a/(b-c)$ if it receives 1 and returns the result in **float**. In case, **ratio** receives zero from **difference**, it sends back 0.0 to **main** indicating that $(b-c) = 0$.

Nesting of function calls is also possible. For example, a statement like

```
P = mul(mul(5,2),6);
```

is valid. This represents two sequential function calls. The inner function call is evaluated first and the returned value is again used as an actual argument in the outer function call. If **mul** returns the product of its arguments, then the value of **p** would be 60 ($= 5 \times 2 \times 6$).

Note that the nesting does not mean defining one function within another. Doing this is illegal.

5.16 RECURSION

When a called function in turn calls another function a process of ‘chaining’ occurs. *Recursion* is a special case of this process, where a function calls itself. A very simple example of recursion is presented below:

```
main( )
{
    printf("This is an example of recursion\n")
    main( );
}
```

When executed, this program will produce an output something like this:

```
This is an example of recursion
This is an example of recursion
This is an example of recursion
This is an ex
```

Execution is terminated abruptly; otherwise the execution will continue indefinitely.

Another useful example of recursion is the evaluation of factorials of a given number. The factorial of a number *n* is expressed as a series of repetitive multiplications as shown below:

factorial of *n* = $n(n-1)(n-2).....1$.

For example,

factorial of 4 = $4 \times 3 \times 2 \times 1 = 24$

A function to evaluate factorial of *n* is as follows:

```
factorial(int n)
{
    int fact;
    if (n==1)
        return(1);
    else
        fact = n*factorial(n-1);
    return(fact);
}
```

Let us see how the recursion works. Assume *n* = 3. Since the value of *n* is not 1, the statement

```
fact = n * factorial(n-1);
```

5.22 Computer Programming

will be executed with $n = 3$. That is,

```
fact = 3 * factorial(2);
```

will be evaluated. The expression on the right-hand side includes a call to **factorial** with $n = 2$. This call will return the following value:

```
2 * factorial(1)
```

Once again, **factorial** is called with $n = 1$. This time, the function returns 1. The sequence of operations can be summarized as follows:

```
fact = 3 * factorial(2)
      = 3 * 2 * factorial(1)
      = 3 * 2 * 1
      = 6
```

Recursive functions can be effectively used to solve problems where solution is expressed in terms of successively applying the same solution to subsets of the problem. When we write recursive functions, we must have an **if** statement somewhere to force the function to return without the recursive call being executed. Otherwise, the function will never return.

5.17 PASSING ARRAYS TO FUNCTIONS

5.17.1 One-Dimensional Arrays

Like the values of simple variables, it is also possible to pass the values of an array to a function. To pass a one-dimensional array to a called function, it is sufficient to list the name of the array, *without any subscripts*, and the size of the array as arguments. For example, the call

```
largest(a,n)
```

will pass the whole array **a** to the called function. The called function expecting this call must be appropriately defined. The **largest** function header might look like:

```
float largest(float array[ ], int size)
```

The function **largest** is defined to take two arguments, the array name and the size of the array to specify the number of elements in the array. The declaration of the formal argument array is made as follows:

```
float array[ ];
```

The pair of brackets informs the compiler that the argument **array** is an array of numbers. It is not necessary to specify the size of the **array** here.

Let us consider a problem of finding the largest value in an array of elements. The program is as follows:

```
main( )
{
    float largest(float a[ ], int n);
    float value[4] = {2.5,-4.75,1.2,3.67};
    printf("%f\n", largest(value,4));
}

float largest(float a[], int n)
{
    int i;
    float max;
    max = a[0];
    for(i = 1; i < n; i++)
        if(max < a[i])
```

```

        max = a[i];
    return(max);
}

```

When the function call **largest**(value,4) is made, the values of all elements of array **value** become the corresponding elements of array **a** in the called function. The **largest** function finds the largest value in the array and returns the result to the **main**.

In C, the name of the array represents the address of its first element. By passing the array name, we are, in fact, passing the address of the array to the called function. The array in the called function now refers to the same array stored in the memory. Therefore, any changes in the array in the called function will be reflected in the original array.

Passing addresses of parameters to the functions is referred to as *pass by address* (or pass by pointers). Note that we cannot pass a whole array by value as we did in the case of ordinary variables.

EXAMPLE 5.5 Write a program to calculate the standard deviation of an array of values. The array elements are read from the terminal. Use functions to calculate standard deviation and mean.

Standard deviation of a set of n values is given by

$$S.D = \sqrt{\frac{1}{n} \sum_{i=1}^n (\bar{x} - x_i)^2}$$

where \bar{x} is the mean of the values.

Program

```

#include <math.h>
#define SIZE 5
float std_dev(float a[], int n);
float mean (float a[], int n);
main( )
{
    float value[SIZE];
    int i;

    printf("Enter %d float values\n", SIZE);
    for (i=0 ; i < SIZE ; i++)
        scanf("%f", &value[i]);
    printf("Std.deviation is %f\n", std_dev(value,SIZE));
}

float std_dev(float a[], int n)
{
    int i;
    float x, sum = 0.0;
    x = mean (a,n);
    for(i=0; i < n; i++)
        sum += (x-a[i])*(x-a[i]);
    return(sqrt(sum/(float)n));
}

float mean(float a[],int n)

```

(Contd.)

5.24 Computer Programming

```
{
    int i ;
    float sum = 0.0;
    for(i=0 ; i < n ; i++)
        sum = sum + a[i];
    return(sum/(float)n);
}
```

Output

```
Enter 5 float values
35.0 67.0 79.5 14.20 55.75
Std.deviation is 23.231582
```

Fig. 5.11 Passing of arrays to a function

A multifunction program consisting of **main**, **std_dev**, and **mean** functions is shown in Fig. 5.11. **main** reads the elements of the array **value** from the terminal and calls the function **std_dev** to print the standard deviation of the array elements. **Std_dev**, in turn, calls another function **mean** to supply the average value of the array elements.

Both **std_dev** and **mean** are defined as **floats** and therefore they are declared as **floats** in the global section of the program.

Three Rules to Pass an Array to a Function

1. The function must be called by passing only the name of the array.
2. In the function definition, the formal parameter must be an array type; the size of the array does not need to be specified.
3. The function prototype must show that the argument is an array.

When dealing with array arguments, we should remember one major distinction. If a function changes the values of the elements of an array, then these changes will be made to the original array that passed to the function. When an entire array is passed as an argument, the contents of the array are not copied into the formal parameter array; instead, information about the addresses of array elements are passed on to the function. Therefore, any changes introduced to the array elements are truly reflected in the original array in the calling function. However, this does not apply when an individual element is passed on as argument. Example 5.6 highlights these concepts.

EXAMPLE 5.6 Write a program that uses a function to sort an array of integers.

A program to sort an array of integers using the function **sort()** is given in Fig. 5.12. Its output clearly shows that a function can change the values in an array passed as an argument.

Program

```
void sort(int m, int x[ ] );
main()
{
    int i;
    int marks[5] = {40, 90, 73, 81, 35};

    printf("Marks before sorting\n");
    for(i = 0; i < 5; i++)
```

(Contd.)

```

        printf("%d ", marks[i]);
    printf("\n\n");
    sort (5, marks);
    printf("Marks after sorting\n");
    for(i = 0; i < 5; i++)
        printf("%4d", marks[i]);
    printf("\n");
}
void sort(int m, int x[ ])
{
    int i, j, t;

    for(i = 1; i <= m-1; i++)
    for(j = 1; j <= m-i; j++)
        if(x[j-1] >= x[j])
        {
            t = x[j-1];
            x[j-1] = x[j];
            x[j] = t;
        }
}

```

Output

```

Marks before sorting
40 90 73 81 35
Marks after sorting
35 40 73 81 90

```

Fig. 5.12 *Sorting of array elements using a function***5.17.2 Two-Dimensional Arrays**

Like simple arrays, we can also pass multi-dimensional arrays to functions. The approach is similar to the one we did with one-dimensional arrays. The rules are simple.

1. The function must be called by passing only the array name.
2. In the function definition, we must indicate that the array has two-dimensions by including two sets of brackets.
3. The size of the second dimension must be specified.
4. The prototype declaration should be similar to the function header.

The function given below calculates the average of the values in a two-dimensional matrix.

```

double average(int x[][N], int M, int N)
{
    int i, j;
    double sum = 0.0;
    for (i=0; i<M; i++)
        for(j=1; j<N; j++)
            sum += x[i][j];
    return(sum/(M*N));
}

```

5.26 Computer Programming

This function can be used in a main function as illustrated below:

```
main( )
{
    int M=3, N=2;
    double average(int [ ] [N], int, int);
    double mean;
    int matrix [M] [N]=
        {
            {1,2},
            {3,4},
            {5,6}
        };
    mean = average(matrix, M, N);
    . . . . .
    . . . . .
}
```

Matrix

An $m \times n$ (read as m by n) order matrix is a set of numbers arranged in m rows and n columns. Matrices of the same order can be added by adding the corresponding elements. Two matrices can be multiplied, the condition being that the number of columns of the first matrix is equal to the number of rows of the second matrix. Hence, if an $m \times n$ matrix is multiplied with an $n \times r$ matrix, then the resultant matrix will be of the order $m \times r$

If $a[i][j]$ is equal to $a[j][i]$ then matrix is symmetric matrix

A two-dimensional array can function exactly like a matrix. Two-dimensional arrays can be visualized as a table consisting of rows and columns

```
/* a C program that uses functions to perform the following:
   i) Addition of Two Matrices
   ii) Multiplication of Two Matrices
*/

#include<stdio.h>

void main()
{
    int ch,i,j,m,n,p,q,k,r1,c1,a[10][10],b[10][10],c[10][10];
    clrscr();
    printf("*****");
    printf("\n\t\tMENU");
    printf("\n*****");
    printf("\n[1]ADDITION OF TWO MATRICES");
    printf("\n[2]MULTIPLICATION OF TWO MATRICES");
    printf("\n[0]EXIT");
    printf("\n*****");
    printf("\n\tEnter your choice:\n");
    scanf("%d",&ch);

    if(ch<=2 & ch>0)
    {
        printf("Valid Choice\n");
    }

    switch(ch)
```



```

{
    case 1:
        printf("Input rows and columns of A & B Matrix:");
        scanf("%d%d",&r1,&c1);
        printf("Enter elements of matrix A:\n");
        for(i=0;i<r1;i++)
        {
            for(j=0;j<c1;j++)
                scanf("%d",&a[i][j]);
        }
        printf("Enter elements of matrix B:\n");
        for(i=0;i<r1;i++)
        {
            for(j=0;j<c1;j++)
                scanf("%d",&b[i][j]);
        }
        printf("\n =====Matrix Addition===== \n");
        for(i=0;i<r1;i++)
        {
            for(j=0;j<c1;j++)
                printf("%5d",a[i][j]+b[i][j]);
            printf("\n");
        }
        break;

    case 2:
        printf("Input rows and columns of A matrix:");
        scanf("%d%d",&m,&n);
        printf("Input rows and columns of B matrix:");
        scanf("%d%d",&p,&q);
        if(n==p)
        {
            printf("matrices can be multiplied\n");
            printf("resultant matrix is %d*%d\n",m,q);
            printf("Input A matrix\n");
            read_matrix(a,m,n);
            printf("Input B matrix\n");
            /*Function call to read the matrix*/
            read_matrix(b,p,q);
            /*Function for Multiplication of two matrices*/
            printf("\n =====Matrix Multiplication===== \n");
            for(i=0;i<m;++i)
                for(j=0;j<q;++j)
                {
                    c[i][j]=0;
                    for(k=0;k<n;++k)
                        c[i][j]=c[i][j]+a[i][k]*b[k][j];
                }

            printf("Resultant of two matrices:\n");
            write_matrix(c,m,q);
        }
        /*end if*/
    else
    {
        printf("Matrices cannot be multiplied.");
    }
}

```

5.28 Computer Programming

```
    }
    /*end else*/
    break;

    case 0:
    printf("\n Choice Terminated");
    exit();
    break;

    default:
    printf("\n Invalid Choice");
}
getch();
}

/*Function read matrix*/
int read_matrix(int a[10][10],int m,int n)
{
    int i,j;
    for(i=0;i<m;i++)
    for(j=0;j<n;j++)
    scanf("%d",&a[i][j]);
    return 0;
}

/*Function to write the matrix*/
int write_matrix(int a[10][10],int m,int n)
{
    int i,j;
    for(i=0;i<m;i++)
    {
    for(j=0;j<n;j++)
    printf("%5d",a[i][j]);
    printf("\n");
    }
    return 0;
}

/* program for symmetric matrix*/

#include<stdio.h>
#include<conio.h>

main()
{
    int m, n, c, d, matrix[10][10], transpose[10][10];

    printf("Enter the number of rows and columns of matrix\n");
    scanf("%d%d",&m,&n);
    printf("Enter the elements of matrix\n");

    for ( c = 0 ; c < m ; c++ )
        for ( d = 0 ; d < n ; d++ )
            scanf("%d",&matrix[c][d]);

    if ( m == n ) /* check if order is same */
    {
```

```

    for ( c = 0 ; c < m ; c++ )
    {
        for ( d = 0 ; d < m ; d++ )
        {
            if ( matrix[c][d] != matrix[d][c] )
                break;
        }
        if ( d != m )
            break;
    }
    if ( c == m )
        printf("Symmetric matrix.\n");
    else
        printf("Not a symmetric matrix.\n");

    return 0;
}

```

5.18 PASSING STRINGS TO FUNCTIONS

The strings are treated as character arrays in C and therefore the rules for passing strings to functions are very similar to those for passing arrays to functions.

Basic rules are:

1. The string to be passed must be declared as a formal argument of the function when it is defined.

Example:

```

void display(char item_name[ ])
{
    .....
    .....
}

```

2. The function prototype must show that the argument is a string. For the above function definition, the prototype can be written as

```
void display(char str[ ]);
```

3. A call to the function must have a string array name without subscripts as its actual argument.

Example:

```
display (names);
```

where **names** is a properly declared string array in the calling function.

We must note here that, like arrays, strings in C cannot be passed by value to functions.

Pass by Value versus Pass by Pointers

The technique used to pass data from one function to another is known as *parameter passing*. Parameter passing can be done in two ways:

- Pass by value (also known as call by value).
- Pass by pointers (also known as call by pointers).

In *pass by value*, values of actual parameters are copied to the variables in the parameter list of the called function. The called function works on the copy and not on the original values of the actual parameters. This ensures that the original data in the calling function cannot be changed accidentally.

(Contd.)

In *pass by pointers* (also known as pass by address), the memory addresses of the variables rather than the copies of values are sent to the called function. In this case, the called function directly works on the data in the calling function and the changed values are available in the calling function for its use.

Pass by pointers method is often used when manipulating arrays and strings. This method is also used when we require multiple values to be returned by the called function.

5.19 THE SCOPE, VISIBILITY AND LIFETIME OF VARIABLES

Variables in C differ in behaviour from those in most other languages. For example, in a BASIC program, a variable retains its value throughout the program. It is not always the case in C. It all depends on the ‘storage’ class a variable may assume.

In C not only do all variables have a data type, they also have a *storage class*. The following variable storage classes are most relevant to functions:

1. Automatic variables.
2. External variables.
3. Static variables.
4. Register variables.

We shall briefly discuss the *scope*, *visibility* and *longevity* of each of the above class of variables. The *scope* of variable determines over what region of the program a variable is actually available for use (‘active’). *Longevity* refers to the period during which a variable retains a given value during execution of a program (‘alive’). So longevity has a direct effect on the utility of a given variable. The *visibility* refers to the accessibility of a variable from the memory.

The variables may also be broadly categorized, depending on the place of their declaration, as *internal* (local) or *external* (global). Internal variables are those which are declared within a particular function, while external variables are declared outside of any function.

It is very important to understand the concept of storage classes and their utility in order to develop efficient multifunction programs.

5.19.1 Automatic Variables

Automatic variables are declared inside a function in which they are to be utilized. They are *created* when the function is called and *destroyed* automatically when the function is exited, hence the name automatic. Automatic variables are therefore private (or local) to the function in which they are declared. Because of this property, automatic variables are also referred to as *local* or *internal* variables.

A variable declared inside a function without storage class specification is, by default, an automatic variable. For instance, the storage class of the variable **number** in the example below is automatic.

```
main( )
{
    int number;
    _____
    _____
}
```

We may also use the keyword **auto** to declare automatic variables explicitly.

```
main( )
{
    auto int number;
```

```

    -----
    -----
}

```

One important feature of automatic variables is that their value cannot be changed accidentally by what happens in some other function in the program. This assures that we may declare and use the same variable name in different functions in the same program without causing any confusion to the compiler.

EXAMPLE 5.7 Write a multifunction to illustrate how automatic variables work.

A program with two subprograms **function1** and **function2** is shown in Fig. 5.13. **m** is an automatic variable and it is declared at the beginning of each function. **m** is initialized to 10, 100, and 1000 in **function1**, **function2**, and **main** respectively.

When executed, **main** calls **function2** which in turn calls **function1**. When **main** is active, **m** = 1000; but when **function2** is called, the **main**'s **m** is temporarily put on the shelf and the new local **m** = 100 becomes active. Similarly, when **function1** is called, both the previous values of **m** are put on the shelf and the latest value of **m** (=10) becomes active. As soon as **function1** (**m**=10) is finished, **function2** (**m**=100) takes over again. As soon it is done, **main** (**m**=1000) takes over. The output clearly shows that the value assigned to **m** in one function does not affect its value in the other functions; and the local value of **m** is destroyed when it leaves a function.

Program

```

void function1(void);
void function2(void);
main( )
{
    int m = 1000;
    function2();

    printf("%d\n",m); /* Third output */
}
void function1(void)
{
    int m = 10;

    printf("%d\n",m); /* First output */
}

void function2(void)
{
    int m = 100;
    function1();
    printf("%d\n",m); /* Second output */
}

```

Output

```

10
100
1000

```

Fig. 5.13 Working of automatic variables

5.32 Computer Programming

There are two consequences of the scope and longevity of **auto** variables worth remembering. First, any variable local to **main** will be normally *alive* throughout the whole program, although it is *active* only in **main**. Secondly, during recursion, the nested variables are unique **auto** variables, a situation similar to function-nested **auto** variables with identical names.

5.19.2 External Variables

Variables that are both *alive* and *active* throughout the entire program are known as *external* variables. They are also known as *global* variables. Unlike local variables, global variables can be accessed by any function in the program. External variables are declared outside a function. For example, the external declaration of integer **number** and float **length** might appear as:

```
int number;
float length = 7.5;
main( )
{
    -----
    -----
}
function1( )
{
    -----
    -----
}
function2( )
{
    -----
    -----
}
```

The variables **number** and **length** are available for use in all the three functions. In case a local variable and a global variable have the same name, the local variable will have precedence over the global one in the function where it is declared. Consider the following example:

```
int count;
main( )
{
    count = 10;
    -----
    -----
}
function( )
{
    int count = 0;
    -----
    -----
    count = count+1;
}
```

When the **function** references the variable **count**, it will be referencing only its local variable, not the global one. The value of **count** in **main** will not be affected.

EXAMPLE 5.8 Write a multifunction program to illustrate the properties of global variables.

A program to illustrate the properties of global variables is presented in Fig. 5.14. Note that variable **x** is used in all functions but none except **fun2**, has a definition for **x**. Because **x** has been declared ‘above’ all the functions, it is available to each function without having to pass **x** as a function argument. Further, since the value of **x** is directly available, we need not use **return(x)** statements in **fun1** and **fun3**. However, since **fun2** has a definition of **x**, it returns its local value of **x** and therefore uses a **return** statement. In **fun2**, the global **x** is not visible. The local **x** hides its visibility here.

Program

```
int fun1(void);
int fun2(void);
int fun3(void);
int x ;          /* global */
main( )
{
    x = 10 ;      /* global x */
    printf("x = %d\n", x);
    printf("x = %d\n", fun1());
    printf("x = %d\n", fun2());
    printf("x = %d\n", fun3());
}
fun1(void)
{
    x = x + 10 ;
}
int fun2(void)
{
    int x ;       /* local */
    x = 1 ;
    return (x);
}
fun3(void)
{
    x = x + 10 ;  /* global x */
}
```

Output

```
x = 10
x = 20
x = 1
x = 30
```

Fig. 5.14 Illustration of properties of global variables

Once a variable has been declared as global, any function can use it and change its value. Then, subsequent functions can reference only that new value.

Global Variables as Parameters

Since all functions in a program source file can access global variables, they can be used for passing values between the functions. However, using global variables as parameters for passing values poses certain problems.

(Contd.)

5.34 Computer Programming

- The values of global variables which are sent to the called function may be changed inadvertently by the called function.
- Functions are supposed to be independent and isolated modules. This character is lost, if they use global variables.
- It is not immediately apparent to the reader which values are being sent to the called function.
- A function that uses global variables suffers from reusability.

One other aspect of a global variable is that it is available only from the point of declaration to the end of the program. Consider a program segment as shown below:

```
main( )
{
    y = 5;
    . . . .
}
int y;          /* global declaration */
func1( )
{
    y = y+1;
}
```

We have a problem here. As far as **main** is concerned, **y** is not defined. So, the compiler will issue an error message. Unlike local variables, global variables are initialized to zero by default. The statement

y = y+1;

in **func1** will, therefore, assign 1 to y.

5.19.3 External Declaration

In the program segment above, the **main** cannot access the variable y as it has been declared after the **main** function. This problem can be solved by declaring the variable with the storage class **extern**.

For example:

```
main( )
{
    extern int y;    /* external declaration */
    . . . .
}
func1( )
{
    extern int y;    /* external declaration */
    . . . .
}
int y;              /* definition */
```

Although the variable **y** has been defined after both the functions, the *external declaration* of **y** inside the functions informs the compiler that y is an integer type defined somewhere else in the program. Note that **extern** declaration does not allocate storage space for variables. In case of arrays, the definition should include their size as well.

Example:

```
main( )
{
    int i;
    void print_out(void);
    extern float height [ ];
    . . . . .
    print_out( );
}
void print_out(void)
{
    extern float height [ ];
    int i;
    . . . . .
}
float height[SIZE];
```

An **extern** within a function provides the type information to just that one function. We can provide type information to all functions within a file by placing external declarations before any of them.

Example:

```
extern float height[ ];
main( )
{
    int i;
    void print_out(void);
    . . . . .
    print_out( );
}
void print_out(void)
{
    int i;
    . . . . .
}
float height[SIZE];
```

The distinction between definition and declaration also applies to functions. A function is defined when its parameters and function body are specified. This tells the compiler to allocate space for the function code and provides type information for the parameters. Since functions are external by default, we declare them (in the calling functions) without the qualifier **extern**. Therefore, the declaration

```
void print_out(void);
```

is equivalent to

```
extern void print_out(void);
```

Function declarations outside of any function behave the same way as variable declarations.

Static Variables

As the name suggests, the value of static variables persists until the end of the program. A variable can be declared *static* using the keyword **static** like

```
static int x;
static float y;
```

5.36 Computer Programming

A static variable may be either an internal type or an external type depending on the place of declaration.

Internal static variables are those which are declared inside a function. The scope of internal static variables extend up to the end of the function in which they are defined. Therefore, internal **static** variables are similar to **auto** variables, except that they remain in existence (alive) throughout the remainder of the program. Therefore, internal **static** variables can be used to retain values between function calls. For example, it can be used to count the number of calls made to a function.

EXAMPLE 5.9 Write a program to illustrate the properties of a static variable.

The program in Fig. 5.15 explains the behavior of a static variable.

Program

```
void stat(void);
main ( )
{
    int i;
    for(i=1; i<=3; i++)
        stat( );
}
void stat(void)
{
    static int x = 0;
    x = x+1;
    printf("x = %d\n", x);
}
```

Output

```
x = 1
x = 2
x = 3
```

Fig. 5.15 Illustration of static variable

A static variable is initialized only once, when the program is compiled. It is never initialized again. During the first call to **stat**, **x** is incremented to 1. Because **x** is static, this value persists and therefore, the next call adds another 1 to **x** giving it a value of 2. The value of **x** becomes three when the third call is made.

Had we declared **x** as an **auto** variable, the output would have been:

```
x = 1
x = 1
x = 1
```

This is because each time **stat** is called, the auto variable **x** is initialized to zero. When the function terminates, its value of 1 is lost.

An external **static** variable is declared outside of all functions and is available to all the functions in that program. The difference between a **static** external variable and a simple external variable is that the **static** external variable is available only within the file where it is defined while the simple external variable can be accessed by other files.

It is also possible to control the scope of a function. For example, we would like a particular function accessible only to the functions in the file in which it is defined, and not to any function in other files. This can be accomplished by defining 'that' function with the storage class **static**.

Register Variables

We can tell the compiler that a variable should be kept in one of the machine's registers, instead of keeping in the memory (where normal variables are stored). Since a register access is much faster than a memory access, keeping the frequently accessed variables (e.g. loop control variables) in the register will lead to faster execution of programs. This is done as follows:

```
register int count;
```

Although, ANSI standard does not restrict its application to any particular data type, most compilers allow only **int** or **char** variables to be placed in the register.

Since only a few variables can be placed in the register, it is important to carefully select the variables for this purpose. However, C will automatically convert **register** variables into non-register variables once the limit is reached.

Table 5.1 summarizes the information on the visibility and lifetime of variables in functions and files.

Table 5.1 Scope and Lifetime of Variables

<i>Storage Class</i>	<i>Where declared</i>	<i>Visibility (Active)</i>	<i>Lifetime (Alive)</i>
None	Before all functions in a file (may be initialized)	Entire file plus other files where variable is declared with extern	Entire program (Global)
extern	Before all functions in a file (cannot be initialized) extern and the file where originally declared as global.	Entire file plus other files where variable is declared	Global
static	Before all functions in a file	Only in that file	Global
None or auto	Inside a function (or a block)	Only in that function or block	Until end of function or block
register	Inside a function or block	Only in that function or block	Until end of function or block
static	Inside a function	Only in that function	Global

5.19.4 Nested Blocks

A set of statements enclosed in a set of braces is known a *block* or a *compound statement*. Note that all functions including the **main** use compound *statement*. A block can have its own declarations and other statements. It is also possible to have a block of such statements inside the body of a function or another block, thus creating what is known as *nested blocks* as shown below:

```
main ( )
{
    int a = 20;
    int b = 10;
    . . . . .
    {
        int a = 0;
        int c = a + b;
        . . . . .
    }
    b = a;
}
```

5.38 Computer Programming

When this program is executed, the value **c** will be 10, not 30. The statement **b = a;** assigns a value of 20 to **b** and not zero. Although the scope of **a** extends up to the end of **main** it is not “visible” inside the inner block where the variable **a** has been declared again. The inner **a** hides the visibility of the outer **a** in the inner block. However, when we leave the inner block, the inner **a** is no longer in scope and the outer **a** becomes visible again.

Remember, the variable **b** is not re-declared in the inner block and therefore it is visible in both the blocks. That is why when the statement

```
int c = a + b;
```

is evaluated, **a** assumes a values of 0 and **b** assumes a value of 10.

Although **main**’s variables are visible inside the nested block, the reverse is not true.

Scope Rules

Scope

The region of a program in which a variable is available for use.

Visibility

The program’s ability to access a variable from the memory.

Lifetime

The lifetime of a variable is the duration of time in which a variable exists in the memory during execution.

Rules of use

1. The scope of a global variable is the entire program file.
2. The scope of a local variable begins at point of declaration and ends at the end of the block or function in which it is declared.
3. The scope of a formal function argument is its own function.
4. The lifetime (or longevity) of an **auto** variable declared in **main** is the entire program execution time, although its scope is only the **main** function.
5. The life of an **auto** variable declared in a function ends when the function is exited.
6. A **static** local variable, although its scope is limited to its function, its lifetime extends till the end of program execution.
7. All variables have visibility in their scope, provided they are not declared again.
8. If a variable is redeclared within its scope again, it loses its visibility in the scope of the redeclared variable.

5.20 MULTIFILE PROGRAMS

So far we have been assuming that all the functions (including the **main**) are defined in one file. However, in real-life programming environment, we may use more than one source files which may be compiled separately and linked later to form an executable object code. This approach is very useful because any change in one file does not affect other files thus eliminating the need for recompilation of the entire program.

Multiple source files can share a variable provided it is declared as an external variable appropriately. Variables that are shared by two or more files are global variables and therefore we must declare them accordingly in one file and then explicitly define them with **extern** in other files. Figure 5.16 illustrates the use of **extern** declarations in a multifile program.

The function **main** in **file1** can reference the variable **m** that is declared as global in **file2**. Remember, **function1** cannot access the variable **m**. If, however, the **extern int m;** statement is placed before **main**, then both the functions could refer to **m**. This can also be achieved by using **extern int m;** statement inside each function in **file1**.

The **extern** specifier tells the compiler that the following variable types and names have already been declared elsewhere and no need to create storage space for them. It is the responsibility of the *linker* to resolve the reference problem. It is important to note that a multifile global variable should be declared *without* **extern** in one (and only one) of the files. The **extern** declaration is done in places where secondary references are made. If we declare a variable as global in two different files used by a single program, then the linker will have a conflict as to which variable to use and, therefore, issues a warning.

file1.c	file2.c
<code>#main()</code>	<code>int m /* global variable */</code>
<code>{</code>	<code>function2()</code>
<code>extern int m;</code>	<code>{</code>
<code>int i;</code>	<code>int i;</code>
<code>.</code>	<code>.</code>
<code>.</code>	<code>.</code>
<code>}</code>	<code>}</code>
<code>function1()</code>	<code>function3()</code>
<code>{</code>	<code>{</code>
<code>int j;</code>	<code>int count;</code>
<code>.</code>	<code>.</code>
<code>.</code>	<code>.</code>
<code>}</code>	<code>}</code>

Fig. 5.16 Use of *extern* in a multifile program

The multifile program shown in Fig. 5.16 can be modified as shown in Fig. 5.17.

file1.c	file2.c
<code>int m; /* global variable */</code>	<code>extern int m;</code>
<code>main()</code>	<code>function2()</code>
<code>{</code>	<code>{</code>
<code>int i;</code>	<code>int i;</code>
<code>.</code>	<code>.</code>
<code>}</code>	<code>}</code>
<code>function1()</code>	<code>function3()</code>
<code>{</code>	<code>{</code>
<code>int j;</code>	<code>int count;</code>
<code>.</code>	<code>.</code>
<code>}</code>	<code>}</code>

Fig. 5.17 Another version of a multifile program

When a function is defined in one file and accessed in another, the later file must include a function *declaration*. The declaration identifies the function as an external function whose definition appears elsewhere. We usually place such declarations at the beginning of the file, before all functions. Although all functions are assumed to be external, it would be a good practice to explicitly declare such functions with the storage class **extern**.

5.40 Computer Programming

Numbers of Fibonacci sequence are known as Fibonacci numbers. First few numbers of series are 0, 1, 1, 2, 3, 5, 8, etc. Except first two terms in sequence every other term is the sum of two previous terms. For example, $8 = 3 + 5$ (addition of 3, 5). This sequence has many applications in mathematics and computer science.

```
#include<stdio.h>
#include<conio.h>

int fibonacci(int);

main()
{
    int n, i = 0, c;

    scanf("%d",&n);

    printf("Fibonacci Series in C using recursion\n\n");

    for ( c = 1 ; c <= n ; c++ )
    {
        printf("%d\n", fibonacci(i));
        i++;
    }

    getch();
    return 0;
}

int fibonacci(int n)
{
    if ( n == 0 )
        return 0;
    else if ( n == 1 )
        return 1;
    else
        return ( fibonacci(n-1) + fibonacci(n-2) );
}
```

5.21 TOWER OF HANOI

The tower of Hanoi problem is a game, which comprises of three towers with discs stacked around the first tower initially. The game involves shifting the disks across the adjoining towers. There are some conditions that need to be adhered during the shifting:

1. A larger disk can not be placed on a smaller disk
2. Only one disc can be shifted at a time.

The end objective is to replicate the initial stack of discs into another tower.

Figure 5.18 shows a C program to realize the tower of Hanoi problem.

Program

```
#include<conio.h>
#include<stdio.h>
void tower_hanoi( int num_disk_f, char tower1, char tower2, char tower3)
```

(Contd.)

```

{
    if ( num_disk_f == 1 )
    {
        printf( "\nShift uppermost disk from tower %c to tower %c.", tower1, tower2 );
        return;
    }
    tower_hanoi( num_disk_f - 1, tower1, tower3, tower2 );
    printf( "\nShift uppermost disk from tower %c to tower %c.", tower1, tower2 );
    tower_hanoi( num_disk_f - 1, tower3, tower2, tower1 );
}
void main()
{
    int num_of_disk;
    clrscr();
    printf("\nEnter the number of disks: ");
    scanf("%d",&num_of_disk);
    if(num_of_disk<1)
        printf("\n There are no disks to shift");
    else
        printf("\nThere are %d disks in tower 1\n ",num_of_disk);
    tower_hanoi(num_of_disk,'1','2','3');
    printf("\n\nThe %d disks in tower 1 are shifted in tower 2",num_of_disk);
    getch();
}

```

Output

```

Enter the number of disks: 4
There are 4 disks in tower 1
Shift uppermost disk from tower 1 to tower 3.
Shift uppermost disk from tower 1 to tower 2.
Shift uppermost disk from tower 3 to tower 2.
Shift uppermost disk from tower 1 to tower 3.
Shift uppermost disk from tower 2 to tower 1.
Shift uppermost disk from tower 2 to tower 3.
Shift uppermost disk from tower 1 to tower 3.
Shift uppermost disk from tower 1 to tower 2.
Shift uppermost disk from tower 3 to tower 2.
Shift uppermost disk from tower 3 to tower 1.
Shift uppermost disk from tower 2 to tower 1.
Shift uppermost disk from tower 3 to tower 2.
Shift uppermost disk from tower 1 to tower 3.
Shift uppermost disk from tower 1 to tower 2.
Shift uppermost disk from tower 3 to tower 2.
The 4 disks in tower 1 are shifted in tower 2

```

Fig. 5.18 Tower of Hanoi**Header Files**

A header file is a file containing C declarations and macro definitions to be shared between several source files. Header file can be used in program by *including* it, with the C preprocessing directive ‘#include’.

Header files serve two purposes.

- System header files declare the interfaces to parts of the operating system. You include them in your program to supply the definitions and declarations you need to invoke system calls and libraries.

5.42 Computer Programming

- User defined header files contain declarations for interfaces between the source files of program. If each time a group of related declarations and macro definitions all or most of which are needed in several different source files, it is a good idea to create a header file for them.

Including a header file produces the same results as copying the header file into each source file that needs it. Such copying would be time-consuming and error-prone. With a header file, the related declarations appear in only one place. If they need to be changed, they can be changed in one place, and programs that include the header file will automatically use the new version when next recompiled. The header file eliminates the labor of finding and changing all the copies as well as the risk that a failure to find one copy will result in inconsistencies within a program.

5.22 PREPROCESSOR COMMANDS

Preprocessor commands, as the name suggests, are the instructions that are executed before the source code passes through the compiler. The program that processes the preprocessor command lines or directives is called a preprocessor.

Preprocessor directives are placed in the source program before the main line. Before the source code passes through the compiler, it is examined by the preprocessor for any preprocessor directives. If there are any, appropriate actions (as per the directives) are taken and then the source program is handed over to the compiler.

Preprocessor directives follow special syntax rules that are different from the normal C syntax. They all begin with the symbol # in column one and do not require a semicolon at the end.

Table 5.2 lists some of the key preprocessor directives and their functions:

Table 5.2 Preprocessor Directives

<i>Directive</i>	<i>Function</i>
#define	Defines a macro substitution
#undef	Undefines a macro
#include	Specifies the files to be included
#ifdef	Test for a macro definition
#endif	Specifies the end of #if.
#ifndef	Tests whether a macro is not defined.
#if	Test a compile-time condition
#else	Specifies alternatives when #if test fails.

The preprocessor directives are broadly classified under three categories:

- Macro substitution
- File inclusion
- Conditional inclusion

5.22.1 Macro Substitution Directives

Macro substitution is a process where an identifier in a program is replaced by a predefined string composed of one or more tokens. The preprocessor accomplishes this task under the direction of **#define** statement. This statement, usually known as a *macro definition* (or simply a macro) takes the following general form

```
#define identifier string
```


If this statement is included in the program at the beginning, then the preprocessor replaces every occurrence of the **identifier** in the source code by the string. The keyword **#define** is written just as shown (starting from the first column) followed by the *identifier* and a *string*, with at least one blank space between them. Note that the definition is not terminated by a semicolon. The *string* may be any text, while the *identifier* must be a valid C name.

There are different forms of macro substitution. The most common forms are:

1. Simple macro substitution.
2. Argumented macro substitution.
3. Nested macro substitution.

Simple Macro Substitution

Simple string replacement is commonly used to define constants. Examples of definition of constants are:

```
#define COUNT 100
#define FALSE 0
#define SUBJECTS 6
#define PI 3.1415926
#define CAPITAL "DELHI"
```

Notice that we have written all macros (identifiers) in capitals. It is a convention to write all macros in capitals to identify them as symbolic constants. A definition, such as

```
#define M 5
```

will replace all occurrences of M with 5, starting from the line of definition to the end of the program. However, a macro inside a string does not get replaced. Consider the following two lines:

```
total = M * value;
printf("M = %d\n", M);
```

These two lines would be changed during preprocessing as follows:

```
total = 5 * value;
printf("M = %d\n", 5);
```

Notice that the string "**M=%d\n**" is left unchanged.

A macro definition can include more than a simple constant value. It can include expressions as well.

Following are valid definitions:

```
#define AREA 5 * 12.46
#define SIZE sizeof(int) * 4
#define TWO-PI 2.0 * 3.1415926
```

Argumented Macro Substitution

The preprocessor permits us to define more complex and more useful form of replacements. It takes the form:

#define	identifier(f1, f2, fn)	string
----------------	------------------------------	--------

Notice that there is no space between the macro *identifier* and the left parentheses. The identifiers f1, f2,fn are the formal macro arguments that are analogous to the formal arguments in a function definition. There is a basic difference between the simple replacement discussed above and the replacement of macros with arguments. Subsequent occurrence of a macro with arguments is known as a *macro call* (similar to a function call). When a macro is called, the preprocessor substitutes the string, replacing the formal parameters with the actual parameters. Hence, the string behaves like a template.

5.44 Computer Programming

A simple example of a macro with arguments is

```
#define CUBE(x) (x*x*x)
```

If the following statement appears later in the program

```
volume = CUBE(side);
```

Then the preprocessor would expand this statement to:

```
volume = (side * side * side );
```

Nested Macro Substitution

We can also use one macro in the definition of another macro. That is, macro definitions may be nested. For instance, consider the following macro definitions.

```
#define M 5
#define N M+1
#define SQUARE(x) ((x) * (x))
#define CUBE(x) (SQUARE (x) * (x))
#define SIXTH(x) (CUBE(x) * CUBE(x))
```

The preprocessor expands each **#define** macro, until no more macros appear in the text. For example, the last definition is first expanded into

```
((SQUARE(x) * (x)) * (SQUARE(x) * (x)))
```

Since **SQUARE (x)** is still a macro, it is further expanded into

```
(( ((x)*(x)) * (x)) * ((x) * (x)) * (x))
```

which is finally evaluated as x^6 .

5.22.2 File Inclusion Directive

An external file containing functions or macro definitions can be included as a part of a program so that we need not rewrite those functions or macro definitions. This is achieved by the preprocessor directive

```
#include "filename"
```

where *filename* is the name of the file containing the required definitions or functions. At this point, the preprocessor inserts the entire contents of *filename* into the source code of the program. When the *filename* is included within the double quotation marks, the search for the file is made first in the current directory and then in the standard directories.

Alternatively this directive can take the form

```
#include <filename>
```

without double quotation marks. In this case, the file is searched only in the standard directories.

Nesting of included files is allowed. That is, an included file can include other files. However, a file cannot include itself.

If an included file is not found, an error is reported and compilation is terminated.

Let us assume that we have created the following three files:

```
SYNTAX.C    contains syntax definitions.
STAT.C      contains statistical functions.
TEST.C      contains test functions.
```

We can make use of a definition or function contained in any of these files by including them in the program as:

```
#include <stdio.h>
#include "SYNTAX.C"
#include "STAT.C"
#include "TEST.C"
```

```

#define      M      100
main ()
{
    -----
    -----
    -----
}

```

5.22.3 Conditional Inclusion Directives

Some directives are used to compile a part of the program based on certain conditions. It means that if a specific condition is fulfilled, then the program will be executed otherwise not. These conditional directives are `#if`, `#ifdef`, `#ifndef`, `#elif`, `#else` and `#endif`, as explained below:

#ifdef This directive is used to compile a part of the program only if the macro is defined as a parameter in the program irrespective of its value. The use of `#ifdef` can be explained with the help of the following example:

```

#ifdef max_marks
int marks[max_marks];
#endif

```

In the above example, the second statement will be executed only if the macro `max_marks` has been defined before in the program. If it has not been defined previously, then the `int` statement will not be included in the program execution.

#ifndef This directive is the opposite of `#ifdef` directive. It means that the statements written between `#ifndef` and `#endif` will be executed only if the identifier has not been defined previously. The use of `#ifndef` can be explained with the help of the following example:

```

#ifndef max_marks
#define max_marks 100
#endif

```

According to this directive, the second statement will be executed only if the macro `max_marks` has not been defined earlier.

#if, #else, #elif These directives are used in between a program to allow or prevent the further execution of the program. `#if` is used to check whether the result of a given expression is zero or not. If the result is not zero, then the statements after `#if` are compiled else not. The use of `#if`, `#else` and `#elif` can be explained with the help of the following example:

```

main()
{
    #if AGE<=18
    printf("Juvenile");
    #elif AGE>=18 AGE<=50
    printf("Adult");
    #else
    printf("Aged");
    #endif
}

```

Just Remember

- It is a syntax error if the types in the declaration and function definition do not match.
- It is a syntax error if the number of actual parameters in the function call do not match the number in the declaration statement.
- It is a logic error if the parameters in the function call are placed in the wrong order.
- It is illegal to use the name of a formal argument as the name of a local variable.
- Using **void** as return type when the function is expected to return a value is an error.
- Trying to return a value when the function type is marked **void** is an error.
- Variables in the parameter list must be individually declared for their types. We cannot use multiple declarations (like we do with local or global variables).
- A **return** statement is required if the return type is anything other than **void**.
- If a function does not return any value, the return type must be declared **void**.
- If a function has no parameters, the parameter list must be declared **void**.
- Placing a semicolon at the end of header line is illegal.
- Forgetting the semicolon at the end of a prototype declaration is an error.
- Defining a function within the body of another function is not allowed.
- It is an error if the type of data returned does not match the return type of the function.
- It will most likely result in logic error if there is a mismatch in data types between the actual and formal arguments.
- Functions return integer value by default.
- A function without a return statement cannot return a value, when the parameters are passed by value.
- A function that returns a value can be used in expressions like any other C variable.
- When the value returned is assigned to a variable, the value will be converted to the type of the variable receiving it.
- Function cannot be the target of an assignment.
- A function with void return type cannot be used in the right-hand side of an assignment statement. It can be used only as a stand-alone statement.
- A function that returns a value cannot be used as a stand-alone statement.
- A **return** statement can occur anywhere within the body of a function.
- A function can have more than one return statement.
- A function definition may be placed either after or before the **main** function.
- Where more functions are used, they may be placed in any order.
- A global variable used in a function will retain its value for future use.
- A local variable defined inside a function is known only to that function. It is destroyed when the function is exited.
- A global variable is visible only from the point of its declaration to the end of the program.
- When a variable is redeclared within its scope either in a function or in a block, the original variable is not visible within the scope of the redeclared variable.
- A local variable declared **static** retains its value even after the function is exited.
- Static variables are initialized at compile time and therefore they are initialized only once.
- Use parameter passing by values as far as possible to avoid inadvertent changes to variables of calling function in the called function.
- Although not essential, include parameter names in the prototype declarations for documentation purposes.
- Avoid the use of names that hide names in outer scope.
- The use of functions gives C a modular-based programming approach.
- A function is typically characterised by its name, type and parameters.
- It is a good practice to name a function on the lines of its functionality.
- A function can return multiple values.

- In case of 'pass by reference' function call, the addresses of the variables are passed.
- Make sure that the parameters of a function are declared as pointer types for implementing pass by reference technique.

Multiple Choice Questions

- The default return type of a function is _____.
(a) void (b) int
(c) float (d) char
- Which of the following are the incorrect function declarations?
(a) `int func(int a, b);`
(b) `int func(int a, int b);`
(c) `int func(int , int);`
(d) `int func(int ,);`
- Which of the following is not feasible?
(a) Functions with no arguments and no return values
(b) Functions with arguments and no return values
(c) Functions with no arguments but a return value
(d) All of the above are feasible
- 'Call by reference' function call uses the following type of parameter:
(a) Pointer variables
(b) Integer variables
(c) Address variables
(d) Memory variables
- Recursion is a situation where:
(a) A function calls the main function
(b) A function calls any of the system functions
(c) A function calls itself
(d) None of the above
- Which of the following is not a variable storage class?
(a) automatic (b) external
(c) static (d) dynamic
- Which of the following keywords is used for declaring an external variable?
(a) external (b) extern
(c) auto extern (d) ext
- Which of the following types of variables remain alive for the entire life time of a program?
(a) extern (b) auto
(c) static (d) register
- Which of the following refers to the region of a program where a variable is available for use?
(a) scope (b) visibility
(c) life time (d) None of the above
- The formal arguments in the function header must be prefixed by which of the following indirection operator?
(a) * (b) +
(c) - (d) /
- Which of the following is optional in a function definition?
(a) Function name
(b) Function type
(c) Local variable declaration
(d) Return statement

Case Study

Calculation of Area under a Curve

One of the applications of computers in numerical analysis is computing the area under a curve. One simple method of calculating the area under a curve is to divide the area into a number of trapezoids of same width and summing up the area of individual trapezoids. The area of a trapezoid is given by

$$\text{Area} = 0.5 * (h_1 + h_2) * b$$

where h_1 and h_2 are the heights of two sides and b is the width as shown in Fig. 5.19.

5.48 Computer Programming

The program in Fig. 5.21 calculates the area for a curve of the function

$$f(x) = x^2 + 1$$

between any two given limits, say, A and B.

Input

Lower limit (A)

Upper limit (B)

Number of trapezoids

Output

Total area under the curve between the given limits.

Algorithm

1. Input the lower and upper limits and the number of trapezoids.
2. Calculate the width of trapezoids.
3. Initialize the total area.
4. Calculate the area of trapezoid and add to the total area.
5. Repeat step-4 until all the trapezoids are completed.
6. Print total area.

The algorithm is implemented in top-down modular form as in Fig. 5.20.

The evaluation of $f(x)$ has been done using a separate function so that it can be easily modified to allow other functions to be evaluated.

The output for two runs shows that better accuracy is achieved with larger number of trapezoids. The actual area for the limits 0 and 3 is 12 units (by analytical method).

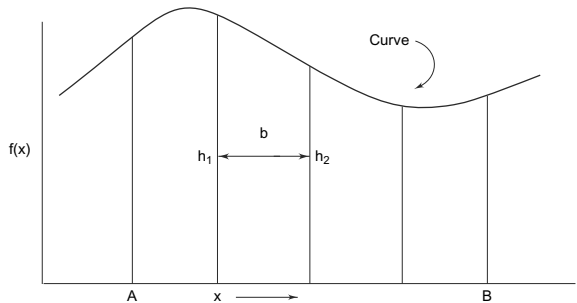


Fig. 5.19 Area under a curve

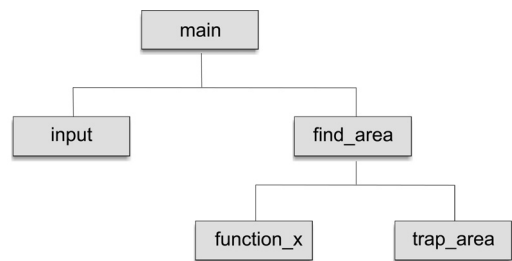


Fig. 5.20 Modular chart

Program

```
#include <stdio.h>
float  start_point,          /* GLOBAL VARIABLES */
      end_point,
      total_area;
int    numtraps;
main( )
{
    void      input(void);
    float  find_area(float a,float b,int n); /* prototype */
    print("AREA UNDER A CURVE");
    input( );
    total_area = find_area(start_point, end_point, numtraps);
    printf("TOTAL AREA = %f", total_area);
}
void input(void)
{
    printf("\n Enter lower limit:");
    scanf("%f", &start_point);
```

(Contd.)

```

    printf("Enter upper limit:");
    scanf("%f", &end_point);
    printf("Enter number of trapezoids:");
    scanf("%d", &numtraps);
}
float find_area(float a, float b, int n)
{
    float base, lower, h1, h2; /* LOCAL VARIABLES */
    float function_x(float x); /* prototype */
    float trap_area(float h1,float h2,float base);/*prototype*/

    base = (b-1)/n;
    lower = a;
    for(lower =a; lower <= b-base; lower = lower + base)
    {
        h1    = function_x(lower);
        h2    = function_x(lower + base);
        total_area += trap_area(h1, h2, base);
    }
    return(total_area);
}
float trap_area(float height_1,float height_2,float base)
{
    float area; /* LOCAL VARIABLE */
    area = 0.5 * (height_1 + height_2) * base;
    return(area);
}
float function_x(float x)
{
    /* F(X) = X * X + 1 */
    return(x*x + 1);
}

```

Output

```

AREA UNDER A CURVE
Enter lower limit: 0
Enter upper limit: 3
Enter number of trapezoids: 30
TOTAL AREA = 12.005000

```

```

AREA UNDER A CURVE
Enter lower limit: 0
Enter upper limit: 3
Enter number of trapezoids: 100
TOTAL AREA = 12.000438

```

Fig. 5.21 Computing area under a curve

Review Questions

- 5.1 State whether the following statements are true or false.
- C functions can return only one value under their function name.
 - A function in C should have at least one argument.
 - A function can be defined and placed before the **main** function.
 - A function can be defined within the **main** function.
 - An user-defined function must be called at least once; otherwise a warning message will be issued.
 - Any name can be used as a function name.
 - Only a **void** type function can have **void** as its argument.
 - When variable values are passed to functions, a copy of them are created in the memory.
 - Program execution always begins in the main function irrespective of its location in the program.
 - Global variables are visible in all blocks and functions in the program.
 - A function can call itself.
 - A function without a **return** statement is illegal.
 - Global variables cannot be declared as **auto** variables.
 - A function prototype must always be placed outside the calling function.
 - The return type of a function is **int** by default.
 - The variable names used in prototype should match those used in the function definition.
 - In parameter passing by pointers, the formal parameters must be prefixed with the symbol ***** in their declarations.
 - In parameter passing by pointers, the actual parameters in the function call may be variables or constants.
 - In passing arrays to functions, the function call must have the name of the array to be passed without brackets.
 - In passing strings to functions, the actual parameter must be name of the string post-fixed with size in brackets.
- 5.2 Fill in the blanks in the following statements.
- The parameters used in a function call are called _____.
 - A variable declared inside a function is called _____.
 - By default, _____ is the return type of a C function.
 - In passing by pointers, the variables of the formal parameters must be prefixed with in _____ their declaration.
 - In prototype declaration, specifying is _____ optional.
 - _____ refers to the region where a variable is actually available for use.
 - A function that calls itself is known as a _____ function.
 - If a local variable has to retain its value between calls to the function, it must be declared as _____.
 - A _____ aids the compiler to check the matching between the actual arguments and the formal ones.
 - A variable declared inside a function by default assumes _____ storage class.
- 5.3 The **main** is a user-defined function. How does it differ from other user-defined functions?
- 5.4 Describe the two ways of passing parameters to functions. When do you prefer to use each of them?
- 5.5 What is prototyping? Why is it necessary?
- 5.6 Distinguish between the following:
- Actual and formal arguments
 - Global and local variables
 - Automatic and static variables
 - Scope and visibility of variables
 - & operator and * operator

- 5.7 Explain what is likely to happen when the following situations are encountered in a program.
- Actual arguments are less than the formal arguments in a function.
 - Data type of one of the actual arguments does not match with the type of the corresponding formal argument.
 - Data type of one of the arguments in a prototype does not match with the type of the corresponding formal parameter in the header line.
 - The order of actual parameters in the function call is different from the order of formal parameters in a function where all the parameters are of the same type.
 - The type of expression used in **return** statement does not match with the type of the function.
- 5.8 Which of the following prototype declarations are invalid? Why?
- `int (fun) void;`
 - `double fun (void)`
 - `float fun (x, y, n);`
 - `void fun (void, void);`
 - `int fun (int a, b);`
 - `fun (int, float, char);`
 - `void fun (int a, int &b);`
- 5.9 Which of the following header lines are invalid? Why?
- `float average (float x, float y, float z);`
 - `double power (double a, int n - 1)`
 - `int product (int m, 10)`
 - `double minimum (double x; double y;)`
 - `int mul (int x, y)`
 - `exchange (int *a, int *b)`
 - `void sum (int a, int b, int &c)`
- 5.10 Find errors, if any, in the following function definitions:
- ```
void abc (int a, int b)
{
 int c;

 return (c);
}
```
  - ```
int abc (int a, int b)
{
```

```

    . . . .
    . . . .
}
(c) int abc (int a, int b)
{
    double c = a + b;
    return (c);
}
(d) void abc (void)
{
    . . . .
    . . . .
    return;
}
(e) int abc(void)
{
    . . . .
    . . . .
    return;
}
```

- 5.11 Find errors in the following function calls:

- `void xyz ();`
- `xyx (void);`
- `xyx (int x, int y);`
- `xyzz () ;`
- `xyz () + xyz () ;`

- 5.12 A function to divide two floating point numbers is as follows:

```
divide (float x, float y)
{
    return (x / y);
}
```

What will be the value of the following function calls:

- `divide (10, 2)`
- `divide (9, 2)`
- `divide (4.5, 1.5)`
- `divide (2.0, 3.0)`

- 5.13 What will be the effect on the above function calls if we change the header line as follows:

- `int divide (int x, int y)`
- `double divide (float x, float y)`

- 5.14 Determine the output of the following program?

```
int prod( int m, int n);
main ( )
{
    int x = 10;
    int y = 20;
    int p, q;
```

5.52 Computer Programming

```
p = prod (x,y);
q = prod (p, prod (x,z));
printf ("%d %d\n", p,q);
}
int prod( int a, int b)
{
    return (a * b);
}
```

5.15 What will be the output of the following program?

```
void test (int *a);
main ( )
{
    int x = 50;
    test ( &x);
    printf("%d\n", x);
}
void test (int *a);
{
    *a = *a + 50;
}
```

5.16 The function **test** is coded as follows:

```
int test (int number)
{
```

```
int m, n = 0;
while (number)
{
    m = number % 10;
    if (m % 2)
        n = n + 1;
    number = number /10;
}
return (n);
}
```

What will be the values of **x** and **y** when the following statements are executed?

```
int x = test (135);
int y = test (246);
```

- 5.17 Enumerate the rules that apply to a function call.
- 5.18 Summarize the rules for passing parameters to functions by pointers.
- 5.19 What are the rules that govern the passing of arrays to function?
- 5.20 State the problems we are likely to encounter when we pass global variables as parameters to functions.

Programming Exercises

- 5.1 Write a function **exchange** to interchange the values of two variables, say **x** and **y**. Illustrate the use of this function, in a calling function. Assume that **x** and **y** are defined as global variables.
- 5.2 Write a function **space(x)** that can be used to provide a space of **x** positions between two output numbers. Demonstrate its application.
- 5.3 Use recursive function calls to evaluate

$$f(x) = x \frac{x^3}{3!} + \frac{x^5}{5!} - \frac{x^7}{7!} + \dots$$

- 5.4 An n _order polynomial can be evaluated as follows:
$$P = (\dots((a_0x+a_1)x+a_2)x+a_3)x+\dots+a_n)$$

Write a function to evaluate the polynomial, using an array variable. Test it using a main program.
- 5.5 The Fibonacci numbers are defined recursively as follows:

$$F_1 = 1$$
$$F_2 = 1$$

$$F_n = F_{n-1} + F_{n-2}, n > 2$$

Write a function that will generate and print the first **n** Fibonacci numbers. Test the function for **n** = 5, 10, and 15.

- 5.6 Write a function that will round a floating-point number to an indicated decimal place. For example the number 17.457 would yield the value 17.46 when it is rounded off to two decimal places.
- 5.7 Write a function **prime** that returns 1 if its argument is a prime number and returns zero otherwise.
- 5.8 Write a function that will scan a character string passed as an argument and convert all lowercase characters into their uppercase equivalents.
- 5.9 Develop a top_down modular program to implement a calculator. The program should request the user to input two numbers and display one of the following as per the desire of the user:
(a) Sum of the numbers

- (b) Difference of the numbers
- (c) Product of the numbers
- (d) Division of the numbers

Provide separate functions for performing various tasks such as reading, calculating and displaying. Calculating module should call second level modules to perform the individual mathematical operations. The main function should have only function calls.

- 5.10 Develop a modular interactive program using functions that reads the values of three sides of a triangle and displays either its area or its perimeter as per the request of the user. Given the three sides a , b and c .

$$\text{Perimeter} = a + b + c$$

$$\text{Area} = \sqrt{s(s-a)(s-b)(s-c)}$$

$$\text{where } s = (a+b+c)/2$$

- 5.11 Write a function that can be called to find the largest element of an m by n matrix.
- 5.12 Write a function that can be called to compute the product of two matrices of size m by n and n by m . The main function provides the values for m and n and two matrices.
- 5.13 Design and code an interactive modular program that will use functions to a matrix of m by n size, compute column averages and row averages, and then print the entire matrix with averages shown in respective rows and columns.
- 5.14 Develop a top-down modular program that will perform the following tasks:
- (a) Read two integer arrays with unsorted elements.
 - (b) Sort them in ascending order
 - (c) Merge the sorted arrays
 - (d) Print the sorted list
- Use functions for carrying out each of the above tasks. The main function should have only function calls.
- 5.15 Develop your own functions for performing following operations on strings:
- (a) Copying one string to another
 - (b) Comparing two strings
 - (c) Adding a string to the end of another string
- Write a driver program to test your functions.
- 5.16 Write a program that invokes a function called **find()** to perform the following tasks:
- (a) Receives a character array and a single character.
 - (b) Returns 1 if the specified character is found in the array, 0 otherwise.
- 5.17 Design a function **locate()** that takes two character arrays **s1** and **s2** and one integer value **m** as parameters and inserts the string **s2** into **s1** immediately after the index **m**. Write a program to test the function using a real-life situation. (**Hint:** **s2** may be a missing word in **s1** that represents a line of text.)
- 5.18 Write a function that takes an integer parameter **m** representing the month number of the year and returns the corresponding name of the month. For instance, if $m = 3$, the month is March. Test your program.
- 5.19 In preparing the calendar for a year we need to know whether that particular year is leap year or not. Design a function **leap()** that receives the year as a parameter and returns an appropriate message. What modifications are required if we want to use the function in preparing the actual calendar?
- 5.20 Write a function that receives a floating point value **x** and returns it as a value rounded to two nearest decimal places. For example, the value 123.4567 will be rounded to 123.46. (**Hint:** Seek help of one of the math functions available in math library.)
-

Key Terms

- **Modular programming:** It is a programming approach of organizing a large program into small, independent program segments known as modules.
- **Program definition:** It is an independent program module that is specially written to implement the requirements of the function.
- **Calling program:** It is the program that calls the function.
- **Function type:** It specifies the type of value that the function is supposed to return.
- **Parameter list:** It declares the variables that will receive the data sent by the calling program.
- **Function body:** It contains the declarations and statements necessary for performing the required task.
- **Local variables:** The variables declared inside a function are known as local variables.
- **Recursion:** It is the process in which a called function in turn calls another function.
- **Internal variables:** These are the variables, which are declared within a particular function.
- **External variables:** These variables are declared outside of any function. These are alive and active throughout the entire program.
- **Block statement:** It is a set of statements enclosed in a set of braces.

UNIT 6

Pointers

6.1 INTRODUCTION

A pointer is a derived data type in C. It is built from one of the fundamental data types available in C. Pointers contain memory addresses as their values. Since these memory addresses are the locations in the computer memory where program instructions and data are stored, pointers can be used to access and manipulate data stored in the memory.

Pointers are undoubtedly one of the most distinct and exciting features of C language. It has added power and flexibility to the language. Although they appear little confusing and difficult to understand for a beginner, they are a powerful tool and handy to use once they are mastered.

Pointers are used frequently in C, as they offer a number of benefits to the programmers. They include:

1. Pointers are more efficient in handling arrays and data tables.
2. Pointers can be used to return multiple values from a function via function arguments.
3. Pointers permit references to functions and thereby facilitating passing of functions as arguments to other functions.
4. The use of pointer arrays to character strings results in saving of data storage space in memory.
5. Pointers allow C to support dynamic memory management.
6. Pointers provide an efficient tool for manipulating dynamic data structures such as structures, linked lists, queues, stacks and trees.
7. Pointers reduce length and complexity of programs.
8. They increase the execution speed and thus reduce the program execution time.

Of course, the real power of C lies in the proper use of pointers. In this chapter, we will examine the pointers in detail and illustrate how to use them in program development.

6.2 UNDERSTANDING POINTERS

The computer's memory is a sequential collection of *storage cells* as shown in Fig. 6.1. Each cell, commonly known as a *byte*, has a number called *address* associated with it. Typically, the addresses are numbered consecutively, starting from zero. The last address depends on the memory size. A computer system having 64 K memory will have its last address as 65,535.

Whenever we declare a variable, the system allocates, somewhere in the memory, an appropriate location to hold the value of the variable. Since, every byte has a unique address number, this location will have its own address number. Consider the following statement

```
int quantity = 179;
```

6.2 Computer Programming

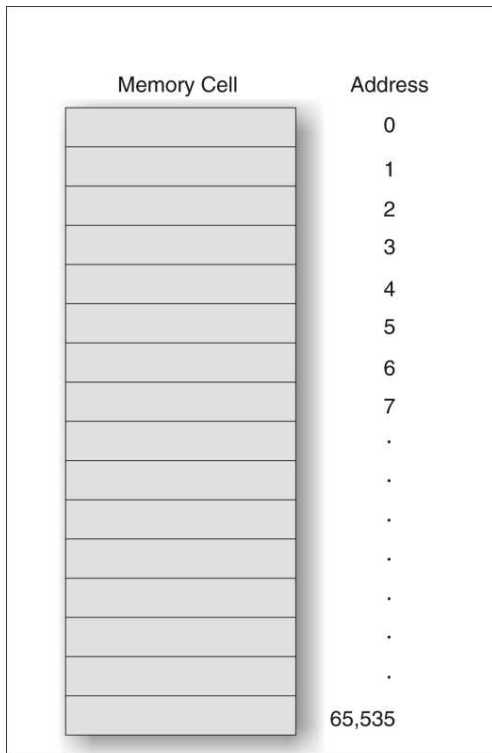


Fig. 6.1 Memory organisation




Fig. 6.2 Representation of a variable

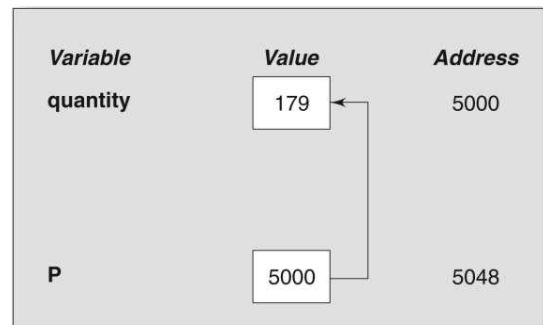


Fig. 6.3 Pointer variable

This statement instructs the system to find a location for the integer variable **quantity** and puts the value 179 in that location. Let us assume that the system has chosen the address location 5000 for **quantity**. We may represent this as shown in Fig. 6.2. (Note that the address of a variable is the address of the first byte occupied by that variable.)

During execution of the program, the system always associates the name **quantity** with the address 5000. (This is something similar to having a house number as well as a house name.) We may have access to the value 179 by using either the name **quantity** or the address 5000. Since memory addresses are simply numbers, they can be assigned to some variables, that can be stored in memory, like any other variable. Such variables that hold memory addresses are called *pointer variables*. A pointer variable is, therefore, nothing but a variable that contains an address, which is a location of another variable in memory.

Remember, since a pointer is a variable, its value is also stored in the memory in another location. Suppose, we assign the address of **quantity** to a variable **p**. The link between the variables **p** and **quantity** can be visualized as shown in Fig. 6.3. The address of **p** is 5048.

Since the value of the variable **p** is the address of the variable **quantity**, we may access the value of **quantity** by using the value of **p** and therefore, we say that the variable **p** 'points' to the variable **quantity**. Thus, **p** gets the name 'pointer'. (We are not really concerned about the actual values of pointer variables. They may be different everytime we run the program. What we are concerned about is the relationship between the variables **p** and **quantity**.)

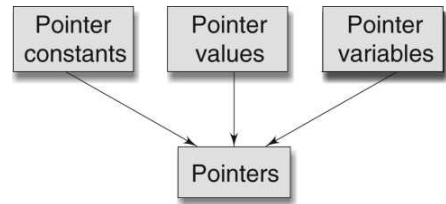
Underlying Concepts of Pointers

Pointers are built on the three underlying concepts as illustrated below:

Memory addresses within a computer are referred to as *pointer constants*. We cannot change them; we can only use them to store data values. They are like house numbers.

We cannot save the value of a memory address directly. We can only obtain the value through the variable stored there using the address operator (&). The value thus obtained is known as *pointer value*. The pointer value (i.e. the address of a variable) may change from one run of the program to another.

Once we have a pointer value, it can be stored into another variable. The variable that contains a pointer value is called a *pointer variable*.



6.3 ACCESSING THE ADDRESS OF A VARIABLE

The actual location of a variable in the memory is system dependent and therefore, the address of a variable is not known to us immediately. How can we then determine the address of a variable? This can be done with the help of the operator **&** available in C. We have already seen the use of this *address operator* in the **scanf** function. The operator **&** immediately preceding a variable returns the address of the variable associated with it. For example, the statement

```
p = &quantity;
```

would assign the address 5000 (the location of **quantity**) to the variable **p**. The **&** operator can be remembered as ‘address of’.

The **&** operator can be used only with a simple variable or an array element. The following are illegal uses of address operator:

1. **&125** (pointing at constants).
2. `int x[10];`
 &x (pointing at array names).
3. **&(x+y)** (pointing at expressions).

If **x** is an array, then expressions such as

```
&x[0] and &x[i+3]
```

are valid and represent the addresses of 0th and (i+3)th elements of **x**.

EXAMPLE 6.1 Write a program to print the address of a variable along with its value.

The program shown in Fig. 6.4, declares and initializes four variables and then prints out these values with their respective storage locations. Note that we have used **%u** format for printing address values. Memory addresses are unsigned integers.

```

Program
main()
{
    char a;
```

(Contd.)

6.4 Computer Programming

```
int    x;
float  p, q;

a = 'A';
x = 125;
p = 10.25, q = 18.76;
printf("%c is stored at addr %u.\n", a, &a);
printf("%d is stored at addr %u.\n", x, &x);
printf("%f is stored at addr %u.\n", p, &p);
printf("%f is stored at addr %u.\n", q, &q);
}
```

Output

```
A is stored at addr 4436.
125 is stored at addr 4434.
10.250000 is stored at addr 4442.
18.760000 is stored at addr 4438.
```

Fig. 6.4 Accessing the address of a variable

6.4 DECLARING POINTER VARIABLES

In C, every variable must be declared for its type. Since pointer variables contain addresses that belong to a separate data type, they must be declared as pointers before we use them. The declaration of a pointer variable takes the following form:

```
data_type *pt_name;
```

This tells the compiler three things about the variable **pt_name**.

1. The asterisk (*) tells that the variable **pt_name** is a pointer variable.
2. **pt_name** needs a memory location.
3. **pt_name** points to a variable of type *data_type*.

For example,


```
int *p;    /* integer pointer */
```

declares the variable **p** as a pointer variable that points to an integer data type. Remember that the type **int** refers to the data type of the variable being pointed to by **p** and not the type of the value of the pointer. Similarly, the statement

```
float *x;    /* float pointer */
```

declares **x** as a pointer to a floating-point variable.

The declarations cause the compiler to allocate memory locations for the pointer variables **p** and **x**. Since the memory locations have not been assigned any values, these locations may contain some unknown values in them and therefore they point to unknown locations as shown:



Pointer Declaration Style

Pointer variables are declared similarly as normal variables except for the addition of the unary `*` operator. This symbol can appear anywhere between the type name and the pointer variable name. Programmers use the following styles:

```
int*   p;    /* style 1 */
int    *p;   /* style 2 */
int   *  p;  /* style 3 */
```

However, the style2 is becoming increasingly popular due to the following reasons:

1. This style is convenient to have multiple declarations in the same statement. Example:

```
int *p, x, *q;
```

2. This style matches with the format used for accessing the target values. Example:

```
int x, *p, y;
x = 10;
p = &x;
y = *p;          /* accessing x through p */
*p = 20;         /* assigning 20 to x */
```

We use in this book the style 2, namely,

```
int *p;
```

6.5 INITIALIZATION OF POINTER VARIABLES

The process of assigning the address of a variable to a pointer variable is known as *initialization*. As pointed out earlier, all uninitialized pointers will have some unknown values that will be interpreted as memory addresses. They may not be valid addresses or they may point to some values that are wrong. Since the compilers do not detect these errors, the programs with uninitialized pointers will produce erroneous results. It is therefore important to initialize pointer variables carefully before they are used in the program.

Once a pointer variable has been declared we can use the assignment operator to initialize the variable. Example:

```
int quantity;
int *p;          /* declaration */
p = &quantity;   /* initialization */
```

We can also combine the initialization with the declaration. That is,

```
int *p = &quantity;
```

is allowed. The only requirement here is that the variable **quantity** must be declared before the initialization takes place. Remember, this is an initialization of **p** and not ***p**.

We must ensure that the pointer variables always point to the corresponding type of data. For example,

```
float a, b;
int x, *p;
p = &a;          /* wrong */
b = *p;
```

will result in erroneous output because we are trying to assign the address of a **float** variable to an **integer pointer**. When we declare a pointer to be of **int** type, the system assumes that any address that the pointer will hold will point to an integer variable. Since the compiler will not detect such errors, care should be taken to avoid wrong pointer assignments.

It is also possible to combine the declaration of data variable, the declaration of pointer variable and the initialization of the pointer variable in one step. For example,

```
int x, *p = &x;    /* three in one */
```

6.6 Computer Programming

is perfectly valid. It declares **x** as an integer variable and **p** as a pointer variable and then initializes **p** to the address of **x**. And also remember that the target variable **x** is declared first. The statement

```
int *p = &x, x;
```

is not valid.

We could also define a pointer variable with an initial value of NULL or 0 (zero). That is, the following statements are valued

```
int *p = NULL;  
int *p = 0;
```

Pointer Flexibility

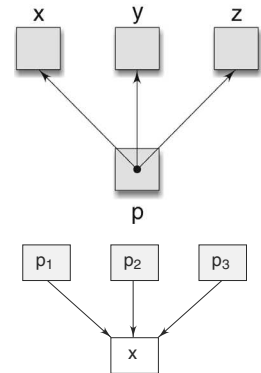
Pointers are flexible. We can make the same pointer to point to different data variables in different statements.

Example;

```
int x, y, z, *p;  
.....  
p = &x;  
.....  
p = &y;  
.....  
p = &z;  
.....
```

We can also use different pointers to point to the same data variable. Example.

```
int x;  
int *p1 = &x;  
int *p2 = &x;  
int *p3 = &x;  
.....  
.....
```



With the exception of NULL and 0, no other constant value can be assigned to a pointer variable. For example, the following is wrong:

```
int *p = 5360;    /* absolute address */
```

6.6 ACCESSING A VARIABLE THROUGH ITS POINTER

Once a pointer has been assigned the address of a variable, the question remains as to how to access the value of the variable using the pointer? This is done by using another unary operator ***** (asterisk), usually known as the *indirection operator*. Another name for the indirection operator is the *dereferencing operator*. Consider the following statements:

```
int quantity, *p, n;  
quantity = 179;  
p = &quantity;  
n = *p;
```

The first line declares **quantity** and **n** as integer variables and **p** as a pointer variable pointing to an integer. The second line assigns the value 179 to **quantity** and the third line assigns the address of **quantity** to the pointer variable **p**. The fourth line contains the indirection operator *****. When the operator ***** is placed before a pointer variable in an expression (on the right-hand side of the equal sign), the pointer returns the value of the variable of which the pointer value is the address. In this case, ***p** returns the value of the variable **quantity**,

because **p** is the address of **quantity**. The ***** can be remembered as ‘value at address’. Thus the value of **n** would be 179. The two statements

```
p = &quantity;
n = *p;
```

are equivalent to

```
n = *&quantity;
```

which in turn is equivalent to

```
n = quantity;
```

In C, the assignment of pointers and addresses is always done symbolically, by means of symbolic names. You cannot access the value stored at the address 5368 by writing `*5368`. It will not work. Example 6.2 illustrates the distinction between pointer value and the value it points to.

EXAMPLE 6.2 Write a program to illustrate the use of indirection operator ‘*****’ to access the value pointed to by a printer.

The program and output are shown in Fig. 6.5. The program clearly shows how we can access the value of a variable using a pointer. You may notice that the value of the pointer **ptr** is 4104 and the value it points to is 10. Further, you may also note the following equivalences:

```
x = *(&x) = *ptr = y
&x = &*ptr
```

Program

```
main()
{
    int  x, y;
    int  *ptr;
    x = 10;
    ptr = &x;
    y = *ptr;
    printf("Value of x is %d\n\n", x);
    printf("%d is stored at addr %u\n", x, &x);
    printf("%d is stored at addr %u\n", *x, &x);
    printf("%d is stored at addr %u\n", *ptr, ptr);
    printf("%d is stored at addr %u\n", ptr, &ptr);
    printf("%d is stored at addr %u\n", y, &y);
    *ptr = 25;
    printf("\nNow x = %d\n", x);
}
```

Output

```
Value of x is 10
10  is stored at addr 4104
10  is stored at addr 4104
10  is stored at addr 4104
4104 is stored at addr 4106
10  is stored at addr 4108
Now x = 25
```

Fig. 6.5 Accessing a variable through its pointer

6.8 Computer Programming

The actions performed by the program are illustrated in Fig. 6.6. The statement **ptr = &x** assigns the address of **x** to **ptr** and **y = *ptr** assigns the value pointed to by the pointer **ptr** to **y**.

Note the use of the assignment statement

***ptr = 25;**

This statement puts the value of 25 at the memory location whose address is the value of **ptr**. We know that the value of **ptr** is the address of **x** and therefore, the old value of **x** is replaced by 25. This, in effect, is equivalent to assigning 25 to **x**. This shows how we can change the value of a variable *indirectly* using a pointer and the *indirection operator*.

6.7 CHAIN OF POINTERS

It is possible to make a pointer to point to another pointer, thus creating a chain of pointers as shown.

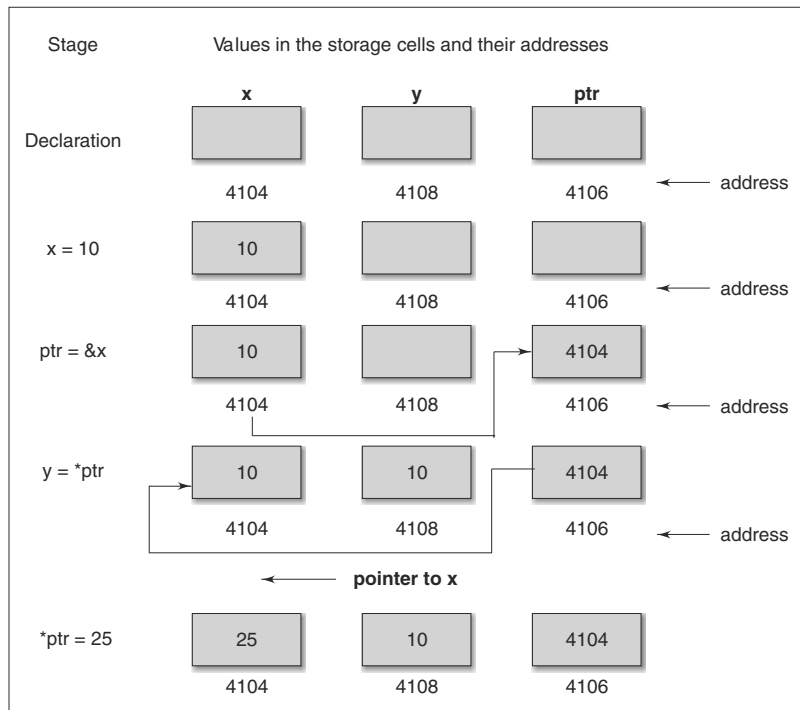



Fig. 6.6 Illustration of pointer assignments

Here, the pointer variable **p2** contains the address of the pointer variable **p1**, which points to the location that contains the desired value. This is known as *multiple indirections*.

A variable that is a pointer to a pointer must be declared using additional indirection operator symbols in front of the name. Example:

```
int **p2;
```

This declaration tells the compiler that **p2** is a pointer to a pointer of **int** type. Remember, the pointer **p2** is not a pointer to an integer, but rather a pointer to an integer pointer.

We can access the target value indirectly pointed to by pointer to a pointer by applying the indirection operator twice. Consider the following code:

```
main ( )
{
    int x, *p1,      **p2;
    x = 100;
    p1 = &x;         /* address of    x */
    p2 = &p1          /* address of    p1 */
    printf ("%d",    **p2);
}
```

This code will display the value 100. Here, **p1** is declared as a pointer to an integer and **p2** as a pointer to a pointer to an integer.

6.8 POINTER EXPRESSIONS

Like other variables, pointer variables can be used in expressions. For example, if **p1** and **p2** are properly declared and initialized pointers, then the following statements are valid.

```
y = *p1 * *p2;           same as (*p1) * (*p2)
sum = sum + *p1;
z = 5* - *p2/ *p1;       same as (5 * (- (*p2)))/(*p1)
*p2 = *p2 + 10;
```

Note that there is a blank space between / and * in the item3 above. The following is wrong.

```
z = 5* - *p2 /*p1;
```

The symbol /* is considered as the beginning of a comment and therefore the statement fails.

C allows us to add integers to or subtract integers from pointers, as well as to subtract one pointer from another. $p1 + 4$, $p2 - 2$ and $p1 - p2$ are all allowed. If **p1** and **p2** are both pointers to the same array, then **p2 - p1** gives the number of elements between **p1** and **p2**.

We may also use short-hand operators with the pointers.

```
p1++;
-p2;
sum += *p2;
```

In addition to arithmetic operations discussed above, pointers can also be compared using the relational operators. The expressions such as **p1 > p2**, **p1 == p2**, and **p1 != p2** are allowed. However, any comparison of pointers that refer to separate and unrelated variables makes no sense. Comparisons can be used meaningfully in handling arrays and strings.

We may not use pointers in division or multiplication. For example, expressions such as

```
p1 / p2 or p1 * p2 or p1 / 3
```

are not allowed. Similarly, two pointers cannot be added. That is, $p1 + p2$ is illegal.

EXAMPLE 6.3 Write a program to illustrate the use of pointers in arithmetic operations.

The program in Fig. 6.7 shows how the pointer variables can be directly used in expressions. It also illustrates the order of evaluation of expressions. For example, the expression

```
4* - *p2 / *p1 + 10
```

6.10 Computer Programming

is evaluated as follows:

$$((4 * (-(*p2))) / (*p1)) + 10$$

When $*p1 = 12$ and $*p2 = 4$, this expression evaluates to 9. Remember, since all the variables are of type `int`, the entire evaluation is carried out using the integer arithmetic.

Program

```
main()
{
    int a, b, *p1, *p2, x, y, z;
    a = 12;
    b = 4;
    p1 = &a;
    p2 = &b;
    x = *p1 * *p2 - 6;
    y = 4 * - *p2 / *p1 + 10;
    printf("Address of a = %u\n", p1);
    printf("Address of b = %u\n", p2);
    printf("\n");
    printf("a = %d, b = %d\n", a, b);
    printf("x = %d, y = %d\n", x, y);
    *p2 = *p2 + 3;
    *p1 = *p2 - 5;
    z = *p1 * *p2 - 6;
    printf("\na = %d, b = %d,", a, b);
    printf(" z = %d\n", z);
}
```

Output

```
Address of a = 4020
Address of b = 4016
a = 12, b = 4
x = 42, y = 9
a = 2, b = 7, z = 8
```

Fig. 6.7 Evaluation of pointer expressions

6.9 POINTER INCREMENTS AND SCALE FACTOR

We have seen that the pointers can be incremented like

```
p1 = p2 + 2;
p1 = p1 + 1;
```

and so on. Remember, however, an expression like

```
p1++;
```

will cause the pointer **p1** to point to the next value of its type. For example, if **p1** is an integer pointer with an initial value, say 2800, then after the operation **p1 = p1 + 1**, the value of **p1** will be 2802, and not 2801. That is, when we increment a pointer, its value is increased by the 'length' of the data type that it points to. This length called the *scale factor*.

For an IBM PC, the length of various data types are as follows:

characters	1 byte
integers	2 bytes
floats	4 bytes
long integers	4 bytes
doubles	8 bytes

The number of bytes used to store various data types depends on the system and can be found by making use of the **sizeof** operator. For example, if **x** is a variable, then **sizeof(x)** returns the number of bytes needed for the variable. (Systems like Pentium use 4 bytes for storing integers and 2 bytes for short integers.)

Rules of Pointer Operations

The following rules apply when performing operations on pointer variables.

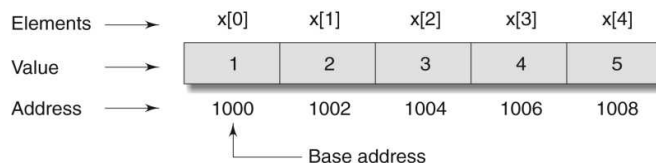
1. A pointer variable can be assigned the address of another variable.
2. A pointer variable can be assigned the values of another pointer variable.
3. A pointer variable can be initialized with NULL or zero value.
4. A pointer variable can be pre-fixed or post-fixed with increment or decrement operators.
5. An integer value may be added or subtracted from a pointer variable.
6. When two pointers point to the same array, one pointer variable can be subtracted from another.
7. When two pointers point to the objects of the same data types, they can be compared using relational operators.
8. A pointer variable cannot be multiplied by a constant.
9. Two pointer variables cannot be added.
10. A value cannot be assigned to an arbitrary address (i.e. `&x = 10;` is illegal).

6.10 POINTERS AND ARRAYS

When an array is declared, the compiler allocates a base address and sufficient amount of storage to contain all the elements of the array in contiguous memory locations. The base address is the location of the first element (index 0) of the array. The compiler also defines the array name as a constant pointer to the first element. Suppose we declare an array **x** as follows:

```
int x[5] = {1, 2, 3, 4, 5};
```

Suppose the base address of **x** is 1000 and assuming that each integer requires two bytes, the five elements will be stored as follows:



The name **x** is defined as a constant pointer pointing to the first element, **x[0]** and therefore the value of **x** is 1000, the location where **x[0]** is stored. That is,

```
x = &x[0] = 1000
```

If we declare **p** as an integer pointer, then we can make the pointer **p** to point to the array **x** by the following assignment:

```
p = x;
```

6.12 Computer Programming

This is equivalent to

p = &x[0];

Now, we can access every value of **x** using **p++** to move from one element to another. The relationship between **p** and **x** is shown as:

p = &x[0] (= 1000)
p+1 = &x[1] (= 1002)
p+2 = &x[2] (= 1004)
p+3 = &x[3] (= 1006)
p+4 = &x[4] (= 1008)

You may notice that the address of an element is calculated using its index and the scale factor of the data type. For instance,

$$\begin{aligned}\text{address of } \mathbf{x[3]} &= \text{base address} + (3 \times \text{scale factor of } \mathbf{int}) \\ &= 1000 + (3 \times 2) = 1006\end{aligned}$$

When handling arrays, instead of using array indexing, we can use pointers to access array elements. Note that ***(p+3)** gives the value of **x[3]**. The pointer accessing method is much faster than array indexing.

Example 6.4 illustrates the use of pointer accessing method.

EXAMPLE 6.4 Write a program using pointers to compute the sum of all elements stored in an array.

The program shown in Fig. 6.8 illustrates how a pointer can be used to traverse an array element. Since incrementing an array pointer causes it to point to the next element, we need only to add one to **p** each time we go through the loop.

Program

```
main()
{
    int *p, sum, i;
    int x[5] = {5,9,6,3,7};
    i = 0;
    p = x;          /* initializing with base address of x */
    printf("Element  Value  Address\n\n");
    while(i < 5)
    {
        printf(" x[%d] %d %u\n", i, *p, p);
        sum = sum + *p; /* accessing array element */
        i++, p++;      /* incrementing pointer */
    }
    printf("\n Sum    = %d\n", sum);
    printf("\n &x[0]  = %u\n", &x[0]);
    printf("\n p      = %u\n", p);
}
```

Output

Element	Value	Address
x[0]	5	166
x[1]	9	168
x[2]	6	170

(Contd.)

x[3]	3	172
x[4]	7	174
Sum	=	55
&x[0]	=	166
p	=	176

Fig. 6.8 Accessing one-dimensional array elements using the pointer

It is possible to avoid the loop control variable **i** as shown:

```

.....
p = x;
while(p <= &x[4])
{
    sum += *p;
    p++;
}
.....

```

Here, we compare the pointer **p** with the address of the last element to determine when the array has been traversed.

Pointers can be used to manipulate two-dimensional arrays as well. We know that in a one-dimensional array **x**, the expression

***(x+i) or *(p+i)**

represents the element **x[i]**. Similarly, an element in a two-dimensional array can be represented by the pointer expression as follows:

***(*(a+i)+j) or *(*(p+i)+j)**

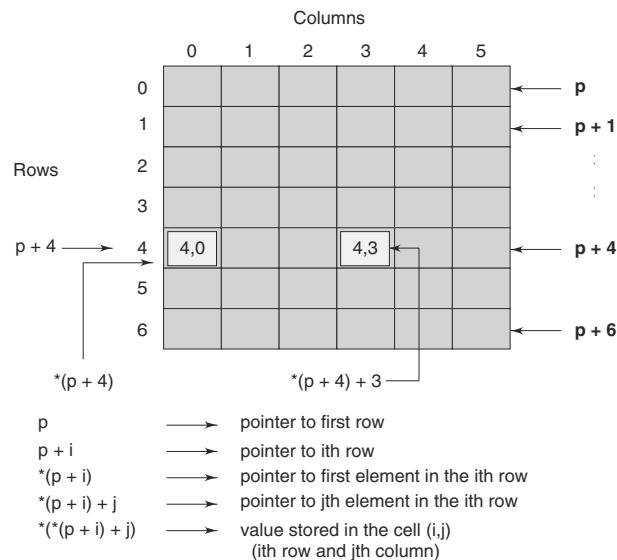


Fig. 6.9 Pointers to two-dimensional arrays


Figure 6.9 illustrates how this expression represents the element **a[i][j]**. The base address of the array **a** is **&a[0][0]** and starting at this address, the compiler allocates contiguous space for all the elements *row-wise*.

6.14 Computer Programming

That is, the first element of the second row is placed immediately after the last element of the first row, and so on. Suppose we declare an array **a** as follows:

```
int a[3][4] = { {15,27,11,35},
                {22,19,31,17},
                {31,23,14,36}
              };
```

The elements of **a** will be stored as:



If we declare **p** as an **int** pointer with the initial address of &a[0][0], then

$a[i][j]$ is equivalent to $*(p+4 \times i+j)$

You may notice that, if we increment **i** by 1, the **p** is incremented by 4, the size of each row. Then the element **a[2][3]** is given by $*(p+2 \times 4+3) = *(p+11)$.

This is the reason why, when a two-dimensional array is declared, we must specify the size of each row so that the compiler can determine the correct storage mapping.

6.11 POINTERS AND CHARACTER STRINGS

Strings are treated like character arrays and therefore, they are declared and initialized as follows:

```
char str [5] = "good";
```

The compiler automatically inserts the null character '\0' at the end of the string. C supports an alternative method to create strings using pointer variables of type **char**. Example:


```
char *str = "good";
```

This creates a string for the literal and then stores its address in the pointer variable **str**.

The pointer **str** now points to the first character of the string "good" as:

We can also use the run-time assignment for giving values to a string pointer. Example

```
char * string1;  
string1 = "good";
```



Note that the assignment

```
string1 = "good";
```

is not a string copy, because the variable **string1** is a pointer, not a string.

C does not support copying one string to another through the assignment operation.)

We can print the content of the string **string1** using either **printf** or **puts** functions as follows:

```
printf("%s", string1);  
puts (string1);
```

Remember, although **string1** is a pointer to the string, it is also the name of the string. Therefore, we do not need to use indirection operator ***** here.

Like in one-dimensional arrays, we can use a pointer to access the individual characters in a string. This is illustrated by Example 6.5.

EXAMPLE 6.5 Write a program using pointers to determine the length of a character string.

A program to count the length of a string is shown in Fig. 6.10. The statement

```
char *cptr = name;
```

declares **cptr** as a pointer to a character and assigns the address of the first character of **name** as the initial value. Since a string is always terminated by the null character, the statement

```
while(*cptr != '\0')
```


is true until the end of the string is reached.

When the **while** loop is terminated, the pointer **cptr** holds the address of the null character. Therefore, the statement

```
length = cptr - name;
```

gives the length of the string **name**.

The output also shows the address location of each character. Note that each character occupies one memory cell (byte).



Program

```
main()
{
    char *name;
    int length;
    char *cptr = name;
    name = "DELHI";
    printf ("%s\n", name);
    while(*cptr != '\0')
    {
        printf("%c is stored at address %u\n", *cptr, cptr);
        cptr++;
    }
    length = cptr - name;
    printf("\nLength of the string = %d\n", length);
}
```

Output

```
DELHI
D is stored at address 54
E is stored at address 55
L is stored at address 56
H is stored at address 57
I is stored at address 58
Length of the string = 5
```

Fig. 6.10 *String handling by pointers*

In C, a constant character string always represents a pointer to that string. And therefore the following statements are valid:

```
char *name;  
name = "Delhi";
```

These statements will declare **name** as a pointer to character and assign to **name** the constant character string “Delhi”. You might remember that this type of assignment does not apply to character arrays. The statements like

6.16 Computer Programming

```
char name[20];  
name = "Delhi";
```


do not work.

6.12 ARRAY OF POINTERS

One important use of pointers is in handling of a table of strings. Consider the following array of strings:

```
char name [3][25];
```

This says that the **name** is a table containing three names, each with a maximum length of 25 characters (including null character). The total storage requirements for the **name** table are 75 bytes.



We know that rarely the individual strings will be of equal lengths. Therefore, instead of making each row a fixed number of characters, we can make it a pointer to a string of varying length. For example,

```
char *name[3] = {  
    "New Zealand",  
    "Australia",  
    "India"  
};
```

declares **name** to be an *array of three pointers* to characters, each pointer pointing to a particular name as:

name [0] ———> New Zealand
name [1] ———> Australia
name [2] ———> India

This declaration allocates only 28 bytes, sufficient to hold all the characters as shown

N	e	w		Z	e	a	l	a	n	d	\0
A	u	s	t	r	a	l	i	a	\0		
I	n	d	i	a	\0						

The following statement would print out all the three names:

```
for(i = 0; i <= 2; i++)  
    printf("%s\n", name[i]);
```

To access the *j*th character in the *i*th name, we may write as

```
*(name[i]+j)
```

The character arrays with the rows of varying length are called ‘ragged arrays’ and are better handled by pointers.

Remember the difference between the notations ***p[3]** and **(*p)[3]**. Since ***** has a lower precedence than **[]**, ***p[3]** declares **p** as an array of 3 pointers while **(*p)[3]** declares **p** as a pointer to an array of three elements.

6.13 POINTERS AS FUNCTION ARGUMENTS

We have seen earlier that when an array is passed to a function as an argument, only the address of the first element of the array is passed, but not the actual values of the array elements. If **x** is an array, when we call **sort(x)**, the address of **x[0]** is passed to the function **sort**. The function uses this address for manipulating the array elements. Similarly, we can pass the address of a variable as an argument to a function in the normal fashion. We used this method when discussing functions that return multiple values.

When we pass addresses to a function, the parameters receiving the addresses should be pointers. The process of calling a function using pointers to pass the addresses of variables is known as ‘*call by reference*’. (You know, the process of passing the actual value of variables is known as “call by value”.) The function which is called by ‘reference’ can change the value of the variable used in the call.

Consider the following code:

```
main()
{
    int x;
    x = 20;
    change(&x);          /* call by reference or address */
    printf("%d\n",x);
}
change(int *p)
{
    *p = *p + 10;
}
```

When the function **change()** is called, the address of the variable **x**, not its value, is passed into the function **change()**. Inside **change()**, the variable **p** is declared as a pointer and therefore **p** is the address of the variable **x**. The statement,

***p = *p + 10;**

means ‘add 10 to the value stored at the address **p**’. Since **p** represents the address of **x**, the value of **x** is changed from 20 to 30. Therefore, the output of the program will be 30, not 20.

Thus, call by reference provides a mechanism by which the function can change the stored values in the calling function. Note that this mechanism is also known as “*call by address*” or “*pass by pointers*”



NOTE: C99 adds a new qualifier **restrict** to the pointers passed as function parameters.

EXAMPLE 6.6 Write a function using pointers to exchange the values stored in two locations in the memory.

The program in Fig. 6.11 shows how the contents of two locations can be exchanged using their address locations. The function **exchange()** receives the addresses of the variables **x** and **y** and exchanges their contents.

```
Program
void exchange (int *, int *);    /* prototype */
main()
{
    int x, y;
```

(Contd.)

6.18 Computer Programming

```
x = 100;
y = 200;
printf("Before exchange : x = %d    y = %d\n\n", x, y);
exchange(&x,&y);    /* call */
printf("After exchange  : x = %d    y = %d\n\n", x, y);
}
exchange (int *a, int *b)
{
    int t;
    t = *a;    /* Assign the value at address a to t */
    *a = *b;    /* put b into a */
    *b = t;    /* put t into b */
}
```

Output

```
Before exchange : x = 100    y = 200
After exchange  : x = 200    y = 100
```

Fig. 6.11 *Passing of pointers as function parameters*

You may note the following points:

1. The function parameters are declared as pointers.
2. The dereferenced pointers are used in the function body.
3. When the function is called, the addresses are passed as actual arguments.

The use of pointers to access array elements is very common in C. We have used a pointer to traverse array elements in Example 6.4. We can also use this technique in designing user-defined functions discussed in Chapter 12. Let us consider the problem sorting an array of integers discussed in Example 5.6.

The function **sort** may be written using pointers (instead of array indexing) as shown:

```
void sort (int m, int *x)
{
    int i j, temp;
    for (i=1; i<= m-1; i++)
        for (j=1; j<= m-1; j++)
            if (*(x+j-1) >= *(x+j))
            {
                temp = *(x+j- 1);
                *(x+j-1) = *(x+j);
                *(x+j) = temp;
            }
}
```

Note that we have used the pointer *x* (instead of array *x[]*) to receive the address of array passed and therefore the pointer *x* can be used to access the array elements (as pointed out in Section 6.10). This function can be used to sort an array of integers as follows:

```
.....
int score[4] = {45, 90, 71, 83};
.....
sort(4, score);    /* Function call */
.....
```

The calling function must use the following prototype declaration.

```
void sort (int, int *);
```

This tells the compiler that the formal argument that receives the array is a pointer, not array variable.

Pointer parameters are commonly employed in string functions. Consider the function `copy` which copies one string to another.

```
copy(char *s1, char *s2)
{
    while( (*s1++ = *s2++) != '\0')
        ;
}
```

This copies the contents of `s2` into the string `s1`. Parameters `s1` and `s2` are the pointers to character strings, whose initial values are passed from the calling function. For example, the calling statement

```
copy(name1, name2);
```

will assign the address of the first element of `name1` to `s1` and the address of the first element of `name2` to `s2`.

Note that the value of `*s2++` is the character that `s2` pointed to before `s2` was incremented. Due to the postfix `++`, `s2` is incremented only after the current value has been fetched. Similarly, `s1` is incremented only after the assignment has been completed.

Each character, after it has been copied, is compared with `'\0'` and therefore copying is terminated as soon as the `'\0'` is copied.

6.14 FUNCTIONS RETURNING POINTERS

We have seen so far that a function can return a single value by its name or return multiple values through pointer parameters. Since pointers are a data type in C, we can also force a function to return a pointer to the calling function. Consider the following code:

```
int *larger (int *, int *);      /* prototype */
main ( )
{
    int a = 10;
    int b = 20;
    int *p;
    p = larger(&a, &b);          /*Function call */
    printf ("%d", *p);
}
int *larger (int *x, int *y)
{
    if (*x>*y)
        return (x);             /* address of a */
    else
        return (y);             /* address of b */
}
```

The function `larger` receives the addresses of the variables `a` and `b`, decides which one is larger using the pointers `x` and `y` and then returns the address of its location. The returned value is then assigned to the pointer variable `p` in the calling function. In this case, the address of `b` is returned and assigned to `p` and therefore the output will be the value of `b`, namely, 20.

Note that the address returned must be the address of a variable in the calling function. It is an error to return a pointer to a local variable in the called function.

6.15 POINTERS TO FUNCTIONS

A function, like a variable, has a type and an address location in the memory. It is therefore, possible to declare a pointer to a function, which can then be used as an argument in another function. A pointer to a function is declared as follows:

```
type (*fptr) ();
```

This tells the compiler that **fptr** is a pointer to a function, which returns *type* value. The parentheses around ***fptr** are necessary. Remember that a statement like

```
type *gptra();
```

would declare **gptra** as a function returning a pointer to *type*.

We can make a function pointer to point to a specific function by simply assigning the name of the function to the pointer. For example, the statements

```
double mul(int, int);
double (*p1)();
p1 = mul;
```

declare **p1** as a pointer to a function and **mul** as a function and then make **p1** to point to the function **mul**. To call the function **mul**, we may now use the pointer **p1** with the list of parameters. That is,

```
(*p1)(x,y) /* Function call */
```

is equivalent to

```
mul(x,y)
```

Note the parentheses around ***p1**.

EXAMPLE 6.7 Write a program that uses a function pointer as a function argument.

A program to print the function values over a given range of values is shown in Fig. 6.12. The printing is done by the function **table** by evaluating the function passed to it by the **main**.

With **table**, we declare the parameter **f** as a pointer to a function as follows:

```
double (*f)();
```

The value returned by the function is of type **double**. When **table** is called in the statement

```
table (y, 0.0, 2, 0.5);
```

we pass a pointer to the function **y** as the first parameter of **table**. Note that **y** is not followed by a parameter list.

During the execution of **table**, the statement

```
value = (*f)(a);
```

calls the function **y** which is pointed to by **f**, passing it the parameter **a**. Thus the function **y** is evaluated over the range 0.0 to 2.0 at the intervals of 0.5.

Similarly, the call

```
table (cos, 0.0, PI, 0.5);
```

passes a pointer to **cos** as its first parameter and therefore, the function **table** evaluates the value of **cos** over the range 0.0 to PI at the intervals of 0.5.

Program

```

#include <math.h>
#define PI 3.1415926
double y(double);
double cos(double);
double table (double(*f)(), double, double, double);

main()
{   printf("Table of y(x) = 2*x*x-x+1\n\n");
    table(y, 0.0, 2.0, 0.5);
    printf("\nTable of cos(x)\n\n");
    table(cos, 0.0, PI, 0.5);
}

double table(double(*f)(),double min, double max, double step)
{   double a, value;
    for(a = min; a <= max; a += step)
    {
        value = (*f)(a);
        printf("%5.2f  %10.4f\n", a, value);
    }
}

double y(double x)
{
    return(2*x*x-x+1);
}

```

Output

```

Table of y(x) = 2*x*x-x+1
  0.00      1.0000
  0.50      1.0000
  1.00      2.0000
  1.50      4.0000
  2.00      7.0000
Table of cos(x)
  0.00      1.0000
  0.50      0.8776
  1.00      0.5403
  1.50      0.0707
  2.00     -0.4161
  2.50     -0.8011
  3.00     -0.9900

```

Fig. 6.12 Use of pointers to functions**Compatibility and Casting**

A variable declared as a pointer is not just a *pointer type* variable. It is also a pointer to a *specific* fundamental data type, such as a character. A pointer therefore always has a type associated with it. We cannot assign a pointer of one type to a pointer of another type, although both of them have memory addresses as their values. This is known as *incompatibility* of pointers.

All the pointer variables store memory addresses, which are compatible, but what is not compatible is the underlying data type to which they point to. We cannot use the assignment operator with the pointers of different types. We can

(Contd.)

6.22 Computer Programming

however make explicit assignment between incompatible pointer types by using **cast** operator, as we do with the fundamental types. Example:

```
int x;
char *p;
p = (char *) &x;
```

In such cases, we must ensure that all operations that use the pointer **p** must apply casting properly.

We have an exception. The exception is the void pointer (void *). The void pointer is a **generic pointer** that can represent any pointer type. All pointer types can be assigned to a void pointer and a void pointer can be assigned to any pointer without casting. A void pointer is created as follows:

```
void *vp;
```

Remember that since a void pointer has no object type, it cannot be de-referenced.

6.16 POINTERS AND STRUCTURES

We know that the name of an array stands for the address of its zeroth element. The same thing is true of the names of arrays of structure variables. Suppose **product** is an array variable of **struct** type. The name **product** represents the address of its zeroth element. Consider the following declaration:

```
struct inventory
{
    char    name[30];
    int     number;
    float   price;
} product[2], *ptr;
```

This statement declares **product** as an array of two elements, each of the type **struct inventory** and **ptr** as a pointer to data objects of the type **struct inventory**. The assignment

```
ptr = product;
```

would assign the address of the zeroth element of **product** to **ptr**. That is, the pointer **ptr** will now point to **product[0]**. Its members can be accessed using the following notation.

```
ptr -> name
ptr -> number
ptr -> price
```

The symbol \rightarrow is called the *arrow operator* (also known as *member selection operator*) and is made up of a minus sign and a greater than sign. Note that **ptr** \rightarrow is simply another way of writing **product[0]**.

When the pointer **ptr** is incremented by one, it is made to point to the next record, i.e., **product[1]**. The following **for** statement will print the values of members of all the elements of **product** array.

```
for(ptr = product; ptr < product+2; ptr++)
    printf ("%s %d %f\n", ptr->name, ptr->number, ptr->price);
```

We could also use the notation

```
(*ptr).number
```

to access the member **number**. The parentheses around ***ptr** are necessary because the member operator **.** has a higher precedence than the operator *****.

EXAMPLE 6.8 Write a program to illustrate the use of structure pointers.

A program to illustrate the use of a structure pointer to manipulate the elements of an array of structures is shown in Fig. 6.13. The program highlights all the features discussed above. Note that the pointer **ptr** (of type **struct invent**) is also used as the loop control index in **for** loops.

Program

```
struct invent
{
    char *name[20];
    int number;
    float price;
};
main()
{
    struct invent product[3], *ptr;
    printf("INPUT\n\n");
    for(ptr = product; ptr < product+3; ptr++)
        scanf("%s %d %f", ptr->name, &ptr->number, &ptr->price);
    printf("\nOUTPUT\n\n");
    ptr = product;
    while(ptr < product + 3)
    {
        printf("%-20s %5d %10.2f\n",
            ptr->name,
            ptr->number,
            ptr->price);
        ptr++;
    }
}
```

Output

```
INPUT
Washing_machine   5   7500
Electric_iron     12   350
Two_in_one        7   1250

OUTPUT
Washing machine    5   7500.00
Electric_iron      12  350.00
Two_in_one         7  1250.00
```

Fig. 6.13 Pointer to structure variables

While using structure pointers, we should take care of the precedence of operators.

The operators ‘->’ and ‘.’, and () and [] enjoy the highest priority among the operators. They bind very tightly with their operands. For example, given the definition

```
struct
{
    int count;
    float *p; /* pointer inside the struct */
} ptr; /* struct type pointer */
```

6.24 Computer Programming

then the statement

```
++ptr->count;
```

increments **count**, not **ptr**. However,

```
(++ptr)->count;
```

increments **ptr** first, and then links **count**. The statement

```
ptr++ -> count;
```

is legal and increments **ptr** after accessing **count**.

The following statements also behave in the similar fashion.

*ptr->p	Fetches whatever p points to.
*ptr->p++	Increments p after accessing whatever it points to.
(*ptr->p)++	Increments whatever p points to.
*ptr++->p	Increments ptr after accessing whatever it points to.

In the previous chapter, we discussed about passing of a structure as an argument to a function. We also saw an example where a function receives a copy of an entire structure and returns it after working on it. As we mentioned earlier, this method is inefficient in terms of both, the execution speed and memory. We can overcome this drawback by passing a pointer to the structure and then using this pointer to work on the structure members. Consider the following function:

```
print_invent(struct invent *item)
{
    printf("Name: %s\n", item->name);
    printf("Price: %f\n", item->price);
}
```


This function can be called by

```
print_invent(&product);
```

The formal argument **item** receives the address of the structure **product** and therefore it must be declared as a pointer of type **struct invent**, which represents the structure of **product**.

Pointer to Pointer

Pointer to Pointer Stores the address of the Pointer Variable. Pointer Stores the address of the Variable. Double (**) is used to denote the double Pointer. The ANSI C standard supports 12 levels of indirection. But two levels of indirection are common. **The number of indirection operators required to completely dereference a pointer is equal to the number of * used while declaring it.**



```
#include<stdio.h>
```

```
int main()
```

```

{
    int num = 45 , *ptr , **ptr2ptr ;
    ptr      = &num;
    ptr2ptr  = &ptr;

    printf("%d",**ptr2ptr);

    return(0);
}
Output is 45

```

6.17 INTRODUCTION

Most often we face situations in programming where the data is dynamic in nature. That is, the number of data items keep changing during execution of the program. For example, consider a program for processing the list of customers of a corporation. The list grows when names are added and shrinks when names are deleted. When list grows we need to allocate more memory space to the list to accommodate additional data items. Such situations can be handled more easily and effectively by using what is known as *dynamic data structures* in conjunction with *dynamic memory management* techniques.

Dynamic data structures provide flexibility in adding, deleting or rearranging data items at run time. Dynamic memory management techniques permit us to allocate additional memory space or to release unwanted space at run time, thus, optimizing the use of storage space. This chapter discusses the concept of *linked lists*, one of the basic types of dynamic data structures. Before we take up linked lists, we shall briefly introduce the dynamic storage management functions that are available in C. These functions would be extensively used in processing linked lists.

6.18 DYNAMIC MEMORY ALLOCATION

C language requires the number of elements in an array to be specified at compile time. But we may not be able to do so always. Our initial judgement of size, if it is wrong, may cause failure of the program or wastage of memory space.

Many languages permit a programmer to specify an array's size at run time. Such languages have the ability to calculate and assign, during execution, the memory space required by the variables in a program. The process of allocating memory at run time is known as *dynamic memory allocation*. Although C does not inherently have this facility, there are four library routines known as "memory management functions" that can be used for allocating and freeing memory during program execution. They are listed in Table 6.1. These functions help us build complex application programs that use the available memory intelligently.

Memory Allocation Process

Before we discuss these functions, let us look at the memory allocation process associated with a C program. Figure 6.14 shows the conceptual view of storage of a C program in memory.

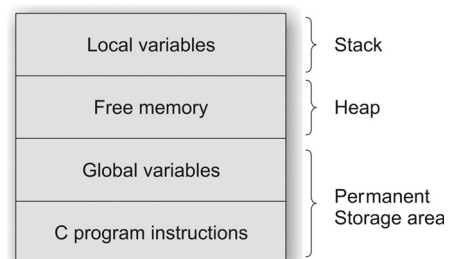


Fig. 6.14 Storage of a C program

Table 6.1 Memory Allocation Functions

Function	Task
malloc	Allocates request size of bytes and returns a pointer to the first byte of the allocated space.
calloc	Allocates space for an array of elements, initializes them to zero and then returns a pointer to the memory.
free	Frees previously allocated space.
realloc	Modifies the size of previously allocated space.

The program instructions and global and static variables are stored in a region known as *permanent storage area* and the local variables are stored in another area called *stack*. The memory space that is located between these two regions is available for dynamic allocation during execution of the program. This free memory region is called the *heap*. The size of the heap keeps changing when program is executed due to creation and death of variables that are local to functions and blocks. Therefore, it is possible to encounter memory “overflow” during dynamic allocation process. In such situations, the memory allocation functions mentioned above return a NULL pointer (when they fail to locate enough memory requested).

6.19 ALLOCATING A BLOCK OF MEMORY: MALLOC

A block of memory may be allocated using the function **malloc**. The **malloc** function reserves a block of memory of specified size and returns a pointer of type **void**. This means that we can assign it to any type of pointer. It takes the following form:

```
ptr = (cast-type *) malloc(byte-size);
```

ptr is a pointer of type *cast-type*. The **malloc** returns a pointer (of *cast-type*) to an area of memory with size *byte-size*.

Example:

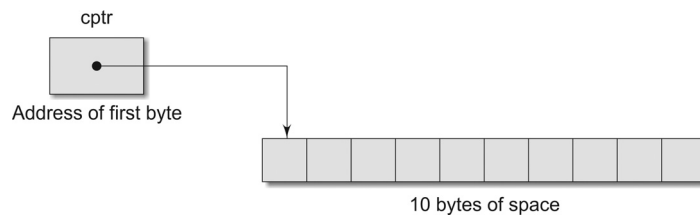
```
x = (int *) malloc (100 *sizeof(int));
```

On successful execution of this statement, a memory space equivalent to “100 times the size of an **int**” bytes is reserved and the address of the first byte of the memory allocated is assigned to the pointer **x** of type of **int**.

Similarly, the statement

```
cptr = (char*) malloc(10);
```

allocates 10 bytes of space for the pointer **cptr** of type **char**. This is illustrated as:



Note that the storage space allocated dynamically has no name and therefore its contents can be accessed only through a pointer.

We may also use **malloc** to allocate space for complex data types such as structures.
Example:

```
st_var = (struct store *)malloc(sizeof(struct store));
```

where, **st_var** is a pointer of type **struct store**

Remember, the **malloc** allocates a block of contiguous bytes. The allocation can fail if the space in the heap is not sufficient to satisfy the request. If it fails, it returns a NULL. We should therefore check whether the allocation is successful before using the memory pointer. This is illustrated in the program in Fig. 6.14.

EXAMPLE 6.9 Write a program that uses a table of integers whose size will be specified interactively at run time.

The program is given in Fig. 6.14. It tests for availability of memory space of required size. If it is available, then the required space is allocated and the address of the first byte of the space allocated is displayed. The program also illustrates the use of pointer variable for storing and accessing the table values.

Program

```
#include <stdio.h>
#include <stdlib.h>
#define NULL 0

main()
{
    int *p, *table;
    int size;
    printf("\nWhat is the size of table?");
    scanf("%d",&size);
    printf("\n")
    /*-----Memory allocation ----- */
    if((table = (int*)malloc(size *sizeof(int))) == NULL)
    {
        printf("No space available \n");
        exit(1);
    }
    printf("\n Address of the first byte is %u\n", table);
    /* Reading table values*/
    printf("\nInput table values\n");

    for (p=table; p<table + size; p++)
        scanf("%d",p);
    /* Printing table values in reverse order*/
    for (p = table + size -1; p >= table; p --)
        printf("%d is stored at address %u \n",*p,p);
}
```

Output

```
What is the size of the table? 5
Address of the first byte is 2262
Input table values
```

(Contd.)

```

11 12 13 14 15 15
15 is stored at address 2270
14 is stored at address 2268
13 is stored at address 2266
12 is stored at address 2264
11 is stored at address 2262

```

Fig. 6.15 Memory allocation with **malloc**

6.20 ALLOCATING MULTIPLE BLOCKS OF MEMORY: CALLOC

calloc is another memory allocation function that is normally used for requesting memory space at run time for storing derived data types such as arrays and structures. While **malloc** allocates a single block of storage space, **calloc** allocates multiple blocks of storage, each of the same size, and then sets all bytes to zero. The general form of **calloc** is:

```
ptr = (cast-type *) calloc (n, elem-size);
```

The above statement allocates contiguous space for *n* blocks, each of size *elem-size* bytes. All bytes are initialized to zero and a pointer to the first byte of the allocated region is returned. If there is not enough space, a NULL pointer is returned.

The following segment of a program allocates space for a structure variable:

```

. . .
. . .
struct student
{
    char name[25];
    float age;
    long int id_num;
};
typedef struct student record;
record *st_ptr;
int class_size = 30;

st_ptr=(record *)calloc(class_size, sizeof(record));
. . .
. . .

```

record is of type **struct student** having three members: **name**, **age** and **id_num**. The **calloc** allocates memory to hold data for 30 such records. We must be sure that the requested memory has been allocated successfully before using the **st_ptr**. This may be done as follows:

```

if(st_ptr == NULL)
{
    printf("Available memory not sufficient");
    exit(1);
}

```

6.21 RELEASING THE USED SPACE: FREE

Compile-time storage of a variable is allocated and released by the system in accordance with its storage class. With the dynamic run-time allocation, it is our responsibility to release the space when it is not required. The release of storage space becomes important when the storage is limited.

When we no longer need the data we stored in a block of memory, and we do not intend to use that block for storing any other information, we may release that block of memory for future use, using the **free** function:

```
free (ptr);
```

ptr is a pointer to a memory block, which has already been created by **malloc** or **calloc**. Use of an invalid pointer in the call may create problems and cause system crash. We should remember two things here:

1. It is not the pointer that is being released but rather what it points to.
2. To release an array of memory that was allocated by **calloc** we need only to release the pointer once. It is an error to attempt to release elements individually.

6.22 COMMAND LINE ARGUMENTS

What is a command line argument? It is a parameter supplied to a program when the program is invoked. This parameter may represent a filename the program should process. For example, if we want to execute a program to copy the contents of a file named **X_FILE** to another one named **Y_FILE**, then we may use a command line like

```
C > PROGRAM X_FILE Y_FILE
```

where **PROGRAM** is the filename where the executable code of the program is stored. This eliminates the need for the program to request the user to enter the filenames during execution. How do these parameters get into the program?

We know that every C program should have one **main** function and that it marks the beginning of the program. But what we have not mentioned so far is that it can also take arguments like other functions. In fact **main** can take two arguments called **argc** and **argv** and the information contained in the command line is passed on to the program through these arguments, when **main** is called up by the system.

The variable **argc** is an argument counter that counts the number of arguments on the command line. The **argv** is an argument vector and represents an array of character pointers that point to the command line arguments. The size of this array will be equal to the value of **argc**. For instance, for the command line given above, **argc** is three and **argv** is an array of three pointers to strings as shown below:

```
argv[0] -> PROGRAM
argv[1] -> X_FILE
argv[2] -> Y_FILE
```

In order to access the command line arguments, we must declare the main function and its parameters as follows:

```
main(int argc, char *argv[])
{
    ....
    ....
}
```

The first parameter in the command line is always the program name and therefore **argv[0]** always represents the program name.

EXAMPLE 6.10 Write a program that will receive a filename and a line of text as command line arguments and write the text to the file.

6.30 Computer Programming

Figure 6.16 shows the use of command line arguments. The command line is

F14_7 TEXT AAAAAA BBBB BB CCCCCC DDDDDD EEEEE E FFFFF GGGGGG

Each word in the command line is an argument to the **main** and therefore the total number of arguments is 9.

The argument vector **argv[1]** points to the string TEXT and therefore the statement

```
fp = fopen(argv[1], "w");
```

opens a file with the name TEXT. The **for** loop that follows immediately writes the remaining 7 arguments to the file TEXT.

Program

```
#include <stdio.h>

main(int argc, char *argv[])
{
    FILE *fp;
    int i;
    char word[15];

    fp = fopen(argv[1], "w"); /* open file with name argv[1] */
    printf("\nNo. of arguments in Command line = %d\n\n",argc);
    for(i = 2; i < argc; i++)
        fprintf(fp,"%s ", argv[i]); /* write to file argv[1] */
    fclose(fp);

    /* Writing content of the file to screen */

    printf("Contents of %s file\n\n", argv[1]);
    fp = fopen(argv[1], "r");
    for(i = 2; i < argc; i++)
    {
        fscanf(fp,"%s", word);
        printf("%s ", word);
    }

    fclose(fp);
    printf("\n\n");

    /* Writing the arguments from memory */

    for(i = 0; i < argc; i++)
        printf("%s \n", i*5,argv[i]);
}
```

Output

```
C>F14_7 TEXT AAAAAA BBBB BB CCCCC DDDDDD EEEEE FFFFF GGGGG
```

```
No. of arguments in Command line = 9
```

```
Contents of TEXT file
```

(Contd.)

```

AAAAAA BBBBBB CCCCCC DDDDDD EEEEE EFFFFF GGGGGG

C:\C\F12_7.EXE
TEXT
  AAAAAA
    BBBBBB
      CCCCCC
        DDDDDD
          EEEEE
            FFFFFF
              GGGGGG

```

Fig. 6.16 Use of command line arguments

Just Remember

- Only an address of a variable can be stored in a pointer variable.
- Do not store the address of a variable of one type into a pointer variable of another type.
- The value of a variable cannot be assigned to a pointer variable.
- A pointer variable contains garbage until it is initialized. Therefore we must not use a pointer variable before it is assigned, the address of a variable.
- Remember that the definition for a pointer variable allocates memory only for the pointer variable, not for the variable to which it is pointing.
- If we want a called function to change the value of a variable in the calling function, we must pass the address of that variable to the called function.
- When we pass a parameter by address, the corresponding formal parameter must be a pointer variable.
- It is an error to assign a numeric constant to a pointer variable.
- It is an error to assign the address of a variable to a variable of any basic data types.
- It is an error to assign a pointer of one type to a pointer of another type without a cast (with an exception of void pointer).
- A proper understanding of a precedence and associativity rules is very important in pointer applications. For example, expressions like `*p++`, `*p[]`, `(*p)[]`, `(p).member` should be carefully used.
- When an array is passed as an argument to a function, a pointer is actually passed. In the header function, we must declare such arrays with proper size, except the first, which is optional.
- A very common error is to use (or not to use) the address operator (`&`) and the indirection operator (`*`) in certain places. Be careful. The compiler may not warn such mistakes.
- Pointers should be used very carefully as they involve direct memory access.
- A pointer-to-a-pointer reference should be used carefully as it involves usage of two indirection operators which could be confusing.
- A pointer variable can be assigned value of another pointer variable.
- A pointer variable can be initialized with a NULL value.
- You can define a pointer to a function that can be used as an argument in another function.
- Use the **sizeof** operator to determine the size of a linked list.
- When using memory allocation functions **malloc** and **calloc**, test for a NULL pointer return value. Print appropriate message if the memory allocation fails.
- Never call memory allocation functions with a zero size.
- Release the dynamically allocated memory when it is no longer required to avoid any possible “memory leak”.

- Using a pointer after its memory has been released is an error.
- It is an error to assign the return value from **malloc** or **calloc** to anything other than a pointer.
- It is a logic error to set a pointer to NULL before the node has been released. The node is irretrievably lost.
- It is an error to declare a self-referential structure without a structure tag.
- It is an error to release individually the elements of an array created with **calloc**.
- It is a logic error to fail to set the link filed in the last node to null.

Multiple Choice Questions

1. Pointer is an example of which of the following type?
 - (a) Derived type
 - (b) Fundamental type
 - (c) User-defined type
 - (d) None of the above
2. An integer pointer:
 - (a) Points to an another integer value
 - (b) Points to the address of another integer value.
 - (c) Points to itself
 - (d) None of the above
3. In the expression `*ptr=&a`, what does `&` signify
 - (a) Address of a (b) Address of ptr
 - (c) Value of a (d) None of the above
4. Which of the following expressions in C is used for accessing the address of a variable var?
 - (a) `&var` (b) `*var`
 - (c) `&(*var)` (d) `*(&var)`
5. Which of the following is a syntactically correct pointer declaration?
 - (a) `float *x;`
 - (b) `float* x;`
 - (c) `float * x;`
 - (d) All of the above are correct
6. Which of the following expressions will give the value stored in variable x?
 - (a) `x` (b) `*x`
 - (c) `*&x` (d) `&x`
7. If `a1=&x` and `a2=&a1`, what will be the output generated by the expression `**a2`?
 - (a) Address of a2
 - (b) Address of a1
 - (c) Value of x
 - (d) Address of x
8. If `a1=2` and `a2=&a1` then what does `a2++` depict (consider the address value of a1 to be 3802)
 - (a) 3 (b) 3803
 - (c) 3804 (d) 3802
9. What will be the expression for obtaining the address of the ith element of an array A?
 - (a) `A[i]` (b) `&A[i]`
 - (c) `*A[i]` (d) `A[&i]`
10. What is the size of an integer & float pointer?
 - (a) 2 & 4 (b) 4 & 4
 - (c) 2 & 2 (d) 1 & 1
11. Linked list uses type of memory allocation
 - (a) static (b) random
 - (c) dynamic (d) compile time
12. The number of extra pointers required to reverse a singly linked list is
 - (a) 1 (b) 2
 - (c) 3 (d) 4
13. The number of extra pointers required to reverse a double linked list is
 - (a) 1 (b) 2
 - (c) 3 (d) 4
14. The functions used for memory allocation are
 - (a) `malloc` (b) `calloc`
 - (c) a and b (d) none of the above
15. Linked lists use _____ type of structures.
 - (a) nested (b) self-referential
 - (c) simple (d) unions
16. _____ cannot be used to represent linked lists.
 - (a) arrays (b) structures

- (c) unions (d) all the above (b) memset(0,m*n)
 17. calloc(m,n) is equivalent to (c) ptr=malloc(m*n)
 (a) malloc(m*n,0) (d) malloc(m/n)
-

Case Study

1. Processing of Examination Marks

Marks obtained by a batch of students in the Annual Examination are tabulated as follows:

Student name	Marks obtained
S. Laxmi	45 67 38 55
V.S. Rao	77 89 56 69
-	- - - -

It is required to compute the total marks obtained by each student and print the rank list based on the total marks.

The program in Fig. 6.15 stores the student names in the array **name** and the marks in the array **marks**. After computing the total marks obtained by all the students, the program prepares and prints the rank list. The declaration

```
int marks[STUDENTS][SUBJECTS+1];
```

defines **marks** as a pointer to the array's first row. We use **rowptr** as the pointer to the row of **marks**. The **rowptr** is initialized as follows:

```
int (*rowptr)[SUBJECTS+1] = array;
```

Note that **array** is the formal argument whose values are replaced by the values of the actual argument **marks**. The parentheses around ***rowptr** makes the **rowptr** as a pointer to an array of **SUBJECTS+1** integers. Remember, the statement

```
int *rowptr[SUBJECTS+1];
```

would declare **rowptr** as an array of **SUBJECTS+1** elements.

When we increment the **rowptr** (by **rowptr+1**), the incrementing is done in units of the size of each row of **array**, making **rowptr** point to the next row. Since **rowptr** points to a particular row, **(*rowptr)[x]** points to the xth element in the row.

Program

```
#define STUDENTS 5
#define SUBJECTS 4
#include <string.h>

main()
{
    char name[STUDENTS][20];
    int marks[STUDENTS][SUBJECTS+1];

    printf("Input students names & their marks in four subjects\n");
    get_list(name, marks, STUDENTS, SUBJECTS);
```

(Contd.)

6.34 Computer Programming

```
get_sum(marks, STUDENTS, SUBJECTS+1);
printf("\n");
print_list(name,marks,STUDENTS,SUBJECTS+1);
get_rank_list(name, marks, STUDENTS, SUBJECTS+1);
printf("\nRanked List\n\n");
print_list(name,marks,STUDENTS,SUBJECTS+1);
}

/* Input student name and marks */
get_list(char *string[ ],
         int array [ ] [SUBJECTS +1], int m, int n)
{
    int i, j, (*rowptr)[SUBJECTS+1] = array;
    for(i = 0; i < m; i++)
    {
        scanf("%s", string[i]);
        for(j = 0; j < SUBJECTS; j++)
            scanf("%d", &((*rowptr + i))[j]);
    }
}

/* Compute total marks obtained by each student */
get_sum(int array [ ] [SUBJECTS +1], int m, int n)
{
    int i, j, (*rowptr)[SUBJECTS+1] = array;
    for(i = 0; i < m; i++)
    {
        (*rowptr + i)[n-1] = 0;
        for(j = 0; j < n-1; j++)
            (*rowptr + i)[n-1] += (*rowptr + i)[j];
    }
}

/* Prepare rank list based on total marks */
get_rank_list(char *string [ ],
              int array [ ] [SUBJECTS + 1]
              int m,
              int n)
{
    int i, j, k, (*rowptr)[SUBJECTS+1] = array;
    char *temp;

    for(i = 1; i <= m-1; i++)
        for(j = 1; j <= m-i; j++)
            if( (*rowptr + j-1)[n-1] < (*rowptr + j)[n-1])
            {
                swap_string(string[j-1], string[j]);

                for(k = 0; k < n; k++)
                    swap_int(&((*rowptr + j-1))[k],&((*rowptr+j))[k]);
            }
}

/* Print out the ranked list */
```

(Contd.)

```

print_list(char *string[ ],
           int array [] [SUBJECTS + 1],
           int m,
           int n)
{
    int i, j, (*rowptr)[SUBJECTS+1] = array;
    for(i = 0; i < m; i++)
    {
        printf("%-20s", string[i]);
        for(j = 0; j < n; j++)
            printf("%5d", (*(rowptr + i))[j]);
        printf("\n");
    }
}

/*      Exchange of integer values      */
swap_int(int *p, int *q)
{
    int temp;
    temp = *p;
    *p = *q;
    *q = temp;
}

/*      Exchange of strings      */
swap_string(char s1[ ], char s2[ ])
{
    char swaparea[256];
    int i;
    for(i = 0; i < 256; i++)
        swaparea[i] = '\0';
    i = 0;
    while(s1[i] != '\0' && i < 256)
    {
        swaparea[i] = s1[i];
        i++;
    }
    i = 0;
    while(s2[i] != '\0' && i < 256)
    {
        s1[i] = s2[i];
        s1[++i] = '\0';
    }
    i = 0;
    while(swaparea[i] != '\0')
    {
        s2[i] = swaparea[i];
        s2[++i] = '\0';
    }
}

```

(Contd.)

Output

Input students names & their marks in four subjects

S.Laxmi	45	67	38	55
V.S.Rao	77	89	56	69
A.Gupta	66	78	98	45
S.Mani	86	72	0	25
R.Daniel	44	55	66	77

S.Laxmi	45	67	38	55	205
V.S.Rao	77	89	56	69	291
A.Gupta	66	78	98	45	287
S.Mani	86	72	0	25	183
R.Daniel	44	55	66	77	242

Ranked List

V.S.Rao	77	89	56	69	291
A.Gupta	66	78	98	45	287
R.Daniel	44	55	66	77	242
S.Laxmi	45	67	38	55	205
S.Mani	86	72	0	25	183

Fig. 6.17 Preparation of the rank list of a class of students

2. Inventory Updating

The price and quantity of items stocked in a store changes every day. They may either increase or decrease. The program in Fig. 6.17 reads the incremental values of price and quantity and computes the total value of the items in stock.

The program illustrates the use of structure pointers as function parameters. **&item**, the address of the structure **item**, is passed to the functions **update()** and **mul()**. The formal arguments **product** and **stock**, which receive the value of **&item**, are declared as pointers of type **struct stores**.

Program

```

struct stores
{
    char name[20];
    float price;
    int quantity;
};
main()
{
    void update(struct stores *, float, int);
    float      p_increment, value;
    int        q_increment;

```

(Contd.)


```

    struct stores item = {"XYZ", 25.75, 12};
    struct stores *ptr = &item;

    printf("\nInput increment values:");
    printf(" price increment and quantity increment\n");
    scanf("%f %d", &p_increment, &q_increment);

    /* ----- */
    update(&item, p_increment, q_increment);
    /* ----- */
    printf("Updated values of item\n\n");
    printf("Name      : %s\n", ptr->name);
    printf("Price      : %f\n", ptr->price);
    printf("Quantity   : %d\n", ptr->quantity);

    /* ----- */
    value = mul(&item);
    /* ----- */
    printf("\nValue of the item = %f\n", value);
}

void update(struct stores *product, float p, int q)
{
    product->price += p;
    product->quantity += q;
}

float mul(struct stores *stock)
{
    return(stock->price * stock->quantity);
}

```

Output

```

Input increment values: price increment and quantity increment
10 12
Updated values of item

Name      : XYZ
Price     : 35.750000
Quantity  : 24

Value of the item = 858.000000

```

Fig. 6.18 Use of structure pointers as function parameters

Review Questions

- 6.1 State whether the following statements are *true* or *false*.
- Pointer constants are the addresses of memory locations.
 - Pointer variables are declared using the address operator.
 - The underlying type of a pointer variable is void.
 - Pointers to pointers is a term used to describe pointers whose contents are the address of another pointer.
 - It is possible to cast a pointer to float as a pointer to integer.
 - An integer can be added to a pointer.
 - A pointer can never be subtracted from another pointer.
 - When an array is passed as an argument to a function, a pointer is passed.
 - Pointers cannot be used as formal parameters in headers to function definitions.
 - Value of a local variable in a function can be changed by another function.
- 6.2 Fill in the blanks in the following statements:
- A pointer variable contains as its value the _____ of another variable.
 - The _____ operator is used with a pointer to de-reference the address contained in the pointer.
 - The _____ operator returns the value of the variable to which its operand points.
 - The only integer that can be assigned to a pointer variable is _____.
 - The pointer that is declared as _____ cannot be de-referenced.
- 6.3 What is a pointer?
- 6.4 How is a pointer initialized?
- 6.5 Explain the effects of the following statements:
- `int a, *b = &a;`
 - `int p, *p;`
 - `char *s;`
 - `a = (float *) &x;`
 - `double(*f)();`
- 6.6 If **m** and **n** have been declared as integers and **p1** and **p2** as pointers to integers, then state errors, if any, in the following statements.
- `p1 = &m;`
 - `p2 = n;`
 - `*p1 = &n;`
 - `p2 = &*m;`
 - `m = p2 - p1;`
 - `p1 = &p2;`
 - `m = *p1 + *p2++;`
- 6.7 Distinguish between `(*m)[5]` and `*m[5]`.
- 6.8 Find the error, if any, in each of the following statements:
- `int x = 10;`
 - `int *y = 10;`
 - `int a, *b = &a;`
 - `int m;`
`int **x = &m;`
- 6.9 Given the following declarations:
- ```
int x = 10, y = 10;
int *p1 = &x, *p2 = &y;
```
- What is the value of each of the following expressions?
- `(*p1)++`
  - `—(*p2)`
  - `*p1 + (*p2) —`
  - `++(*p2) - *p1`
- 6.10 Describe typical applications of pointers in developing programs.
- 6.11 What are the arithmetic operators that are permitted on pointers?
- 6.12 What is printed by the following program?
- ```
int m = 100';
int * p1 = &m;
int **p2 = &p1;
printf("%d", **p2);
```
- 6.13 What is wrong with the following code?
- ```
int **p1, *p2;
p2 = &p1;
```
- 6.14 Assuming **name** as an array of 15 character length, what is the difference between the following two expressions?
- `name + 10;` and
  - `*(name + 10).`

6.15 What is the output of the following segment?

```
int m[2];
*(m+1) = 100;
*m = *(m+1);
printf("%d", m[0]);
```

6.16 What is the output of the following code?

```
int m[2];
int *p = m;
m[0] = 100 ;
m[1] = 200 ;
printf("%d %d", ++*p, *p);
```

6.17 What is the output of the following program?

```
int f(char *p);
main ()
{
 char str[] = "ANSI";
 printf("%d", f(str));
}
int f(char *p)
{
 char *q = p;
 while (*++p)
 ;
 return (p-q);
}
```

6.18 Given below are two different definitions of the function **search()**

- (a) void search (int\* m[ ], int x)
- ```
{
    }
}
```
- (b) void search (int ** m, int x)
- ```
{
 }
}
```

Are they equivalent? Explain.

6.19 Do the declarations

```
char s [5] ;
char *s;
```

represent the same? Explain.

6.20 Which one of the following is the correct way of declaring a pointer to a function? Why?

- (a) int ( \*p) (void) ;  
 (b) int \*p (void);

6.21 State whether the following statements are *true* or *false*.

- (a) Dynamically allocated memory can only be accessed using pointers.

(b) **calloc** is used to change the memory allocation previously allocated with **malloc**

- (c) Only one call to free is necessary to release an entire array allocated with **calloc**  
 (d) Memory should be freed when it is no longer required.  
 (e) To ensure that it is released, allocated memory should be freed before the program ends.  
 (f) The link field in a linked list always points to successor.  
 (g) The first step in adding a node to a linked list is to allocate memory for the next node.

6.22 Fill in the blanks in the following statements.

- (a) Function \_\_\_\_\_ is used to dynamically allocate memory to arrays.  
 (b) A \_\_\_\_\_ is an ordered collection of data in which each element contains the location of the next element.  
 (c) Data structures which contain a member field that points to the same structure type are called \_\_\_\_\_ structures.  
 (d) A \_\_\_\_\_ identifies the last logical node in a linked list.  
 (e) Stacks are referred to as \_\_\_\_\_

6.23 What is a linked list? How is it represented?

6.24 What is dynamic memory allocation? How does it help in building complex programs?

6.25 What is the principal difference between the functions **malloc** and **calloc**

6.26 Find errors, if any, in the following memory management statements:

- (a) \*ptr = (int \*)malloc(m, sizeof(int));  
 (b) table = (float \*)calloc(100);  
 (c) node = free(ptr);

6.27 Why a linked list is called a dynamic data structure? What are the advantages of using linked lists over arrays?

6.28 Describe different types of linked lists.

6.29 Identify errors, if any, in the following structure definition statements:

```
struct
{
```

## 6.40 Computer Programming

```
char name[30]
struct *next;
};
typedef struct node;
```

6.30 The following code is defined in a header file *list.h*

```
typedef struct
{
 char name[15];
 int age;
 float weight;
}DATA;
struct linked_list
{
 DATA person;
 Struct linked_list *next;
};
typedef struct linked_list NODE;
typedef NODE *NDPTR;
```

Explain how could we use this header file for writing programs.

6.31 What does the following code achieve?

```
int * p ;
p = malloc (sizeof (int)) ;
```

6.32 What does the following code do?

```
float *p;
p = calloc (10,sizeof(float)) ;
```

6.33 What is the output of the following code?

```
int i, *ip ;
ip = calloc (4, sizeof(int));
```

```
for (i = 0 ; i < 4 ; i++)
 * ip++ = i * i;
for (i = 0 ; i < 4 ; i++)
 printf("%d\n", *-ip);
```

6.34 What is printed by the following code?

```
int *p;
p = malloc (sizeof (int));
*p = 100 ;
p = malloc (sizeof (int));
*p = 111;
printf("%d", *p);
```

6.35 What is the output of the following segment?

```
struct node
{
 int m ;
 struct node *next;
} x, y, z, *p;
x.m = 10 ;
y.m = 20 ;
z.m = 30 ;
x.next = &y;
y.next = &z;
z.next = NULL;
p = x.next;
while (p != NULL)
{
 printf("%d\n", p -> m);
 p = p -> next;
}
```

---

## Programming Exercises

---

6.1 Write a program using pointers to read in an array of integers and print its elements in reverse order.

6.2 We know that the roots of a quadratic equation of the form

$$ax^2 + bx + c = 0$$

are given by the following equations:

$$x_1 = \frac{-b + \text{square-root}(b^2 - 4ac)}{2a}$$

$$x_2 = \frac{-b - \text{square-root}(b^2 - 4ac)}{2a}$$

Write a function to calculate the roots. The function must use two pointer parameters, one

to receive the coefficients a, b, and c, and the other to send the roots to the calling function.

6.3 Write a function that receives a sorted array of integers and an integer value, and inserts the value in its correct place.

6.4 Write a function using pointers to add two matrices and to return the resultant matrix to the calling function.

6.5 Using pointers, write a function that receives a character string and a character as argument and deletes all occurrences of this character in the string. The function should return the corrected string with no holes.

6.6 Write a function **day\_name** that receives a number n and returns a pointer to a

character string containing the name of the corresponding day. The day names should be kept in a **static** table of character strings local to the function.

- 6.7 Write a program to read in an array of names and to sort them in alphabetical order. Use **sort** function that receives pointers to the functions **strcmp** and **swap.sort** in turn should call these functions via the pointers.
  - 6.8 Given an array of sorted list of integer numbers, write a function to search for a particular item, using the method of *binary search*. And also show how this function may be used in a program. Use pointers and pointer arithmetic.  
(**Hint:** In binary search, the target value is compared with the array's middle element. Since the table is sorted, if the required value is smaller, we know that all values greater than the middle element can be ignored. That is, in one attempt, we eliminate one half the list. This search can be applied recursively till the target value is found.)
  - 6.9 Write a function (using a pointer parameter) that reverses the elements of a given array.
  - 6.10 Write a function (using pointer parameters) that compares two integer arrays to see whether they are identical. The function returns 1 if they are identical, 0 otherwise.
  - 6.11 Write a menu driven program to create a linked list of a class of students and perform the following operations:
    - (a) Write out the contents of the list.
    - (b) Edit the details of a specified student.
    - (c) Count the number of students above a specified age and weight.Make use of the header file defined in Review Question 6.30.
  - 6.12 Write recursive and non-recursive functions for reversing the elements in a linear list. Compare the relative efficiencies of them.
  - 6.13 Write an interactive program to create linear linked lists of customer names and their telephone numbers. The program should be menu driven and include features for adding a new customer and deleting an existing customer.
  - 6.14 Modify the above program so that the list is always maintained in the alphabetical order of customer names.
  - 6.15 Develop a program to combine two sorted lists to produce a third sorted lists which contains one occurrence of each of the elements in the original lists.
  - 6.16 Write a program to create a circular linked list so that the input order of data items maintained. Add function to carry out the following operations on circular linked list.
    - (a) Count the number of nodes
    - (b) Write out contents
    - (c) Locate and write the contents of a given node
  - 6.17 Write a program to construct an ordered doubly linked list and write out the contents of a specified node.
  - 6.18 Write a function that would traverse a linear singly linked list in reverse and write out the contents in reverse order.
  - 6.19 Given two ordered singly linked lists, write a function that will merge them into a third ordered list.
  - 6.20 Write a function that takes a pointer to the first node in a linked list as a parameter and returns a pointer to the last node. NULL should be returned if the list is empty.
  - 6.21 Write a function that counts and returns the total number of nodes in a linked list.
  - 6.22 Write a function that takes a specified node of a linked list and makes it as its last node.
  - 6.23 Write a function that computes and returns the length of a circular list.
  - 6.24 Write functions to implement the following tasks for a doubly linked list.
    - (a) To insert a node.
    - (b) To delete a node.
    - (c) To find a specified node.
-

## Key Terms

---

- **Pointer:** It is a derived data type that contains memory address as its value.
- **Memory:** It is a sequential collection of storage cells.
- **Pointer variables:** These variables hold memory addresses and are stored in the memory.
- **Call by reference:** It is the process of calling a function using pointers to pass the address of the variables.
- **Call by value:** It is the process of passing the actual value of variables.
- **Command line argument:** It is a parameter supplied to a program when the program is invoked.

# UNIT 7

## Structure and Union Types

### 7.1 INTRODUCTION

We have seen that arrays can be used to represent a group of data items that belong to the same type, such as **int** or **float**. However, we cannot use an array if we want to represent a collection of data items of different types using a single name. Fortunately, C supports a constructed data type known as *structures*, a mechanism for packing data of different types. A structure is a convenient tool for handling a group of logically related data items. For example, it can be used to represent a set of attributes, such as `student_name`, `roll_number` and marks. The concept of a structure is analogous to that of a 'record' in many other languages. More examples of such structures are:

|           |   |                                 |
|-----------|---|---------------------------------|
| time      | : | seconds, minutes, hours         |
| date      | : | day, month, year                |
| book      | : | author, title, price, year      |
| city      | : | name, country, population       |
| address   | : | name, door-number, street, city |
| inventory | : | item, stock, value              |
| customer  | : | name, telephone, city, category |

Structures help to organize complex data in a more meaningful way. It is a powerful concept that we may often need to use in our program design. This chapter is devoted to the study of structures and their applications in program development. Another related concept known as *unions* is also discussed.

### 7.2 DEFINING A STRUCTURE

Unlike arrays, structures must be defined first for their format that may be used later to declare structure variables. Let us use an example to illustrate the process of structure definition and the creation of structure variables. Consider a book database consisting of book name, author, number of pages, and price. We can define a structure to hold this information as follows:

```
struct book_bank
{
 char title[20];
 char author[15];
 int pages;
 float price;
};
```

## 7.2 Computer Programming

The keyword **struct** declares a structure to hold the details of four data fields, namely **title**, **author**, **pages**, and **price**. These fields are called *structure elements* or *members*. Each member may belong to a different type of data. **book\_bank** is the name of the structure and is called the *structure tag*. The tag name may be used subsequently to declare variables that have the tag's structure.

Note that the above definition has not declared any variables. It simply describes a format called *template* to represent information as shown below:

|               |                        |
|---------------|------------------------|
| <b>title</b>  | array of 20 characters |
| <b>author</b> | array of 15 characters |
| <b>pages</b>  | integer                |
| <b>price</b>  | float                  |

The general format of a structure definition is as follows:

```
struct tag_name
{
 data_type member1;
 data_type member2;

};
```

In defining a structure you may note the following syntax:

1. The template is terminated with a semicolon.
2. While the entire definition is considered as a statement, each member is declared independently for its name and type in a separate statement inside the template.
3. The tag name such as **book\_bank** can be used to declare structure variables of its type, later in the program.

### Arrays vs Structures

Both the arrays and structures are classified as structured data types as they provide a mechanism that enable us to access and manipulate data in a relatively easy manner. But they differ in a number of ways.

1. An array is a collection of related data elements of same type. Structure can have elements of different types.
2. An array is derived data type whereas a structure is a programmer-defined one.
3. Any array behaves like a built-in data type. All we have to do is to declare an array variable and use it. But in the case of a structure, first we have to design and declare a data structure before the variables of that type are declared and used.

## 7.3 DECLARING STRUCTURE VARIABLES

After defining a structure format we can declare variables of that type. A structure variable declaration is similar to the declaration of variables of any other data types. It includes the following elements:

1. The keyword **struct**.
2. The structure tag name.
3. List of variable names separated by commas.
4. A terminating semicolon.

For example, the statement

```
struct book_bank, book1, book2, book3;
```

declares **book1**, **book2**, and **book3** as variables of type **struct book\_bank**.



Each one of these variables has four members as specified by the template. The complete declaration might look like this:

```
struct book_bank
{
 char title[20];
 char author[15];
 int pages;
 float price;
};
struct book_bank book1, book2, book3;
```

Remember that the members of a structure themselves are not variables. They do not occupy any memory until they are associated with the structure variables such as **book1**. When the compiler comes across a declaration statement, it reserves memory space for the structure variables. It is also allowed to combine both the structure definition and variables declaration in one statement.

The declaration

```
struct book_bank
{
 char title[20];
 char author[15];
 int pages;
 flat price;
} book1, book2, book3;
```

is valid. The use of tag name is optional here. For example:

```
struct
{

} book1, book2, book3;
```

declares **book1**, **book2**, and **book3** as structure variables representing three books, but does not include a tag name. However, this approach is not recommended for two reasons.

1. Without a tag name, we cannot use it for future declarations:
2. Normally, structure definitions appear at the beginning of the program file, before any variables or functions are defined. They may also appear before the **main**, along with macro definitions, such as **#define**. In such cases, the definition is *global* and can be used by other functions as well.

### Type-Defined Structures

We can use the keyword **typedef** to define a structure as follows:

```
typedef struct
{
 type member1;
 type member2;

} type_name;
```

The `type_name` represents structure definition associated with it and therefore can be used to declare structure variables as shown below:

```
type_name variable1, variable2, ;
```

Remember that (1) the name `type_name` is the type definition name, not a variable and (2) we cannot define a variable with `typedef` declaration.

## 7.4 ACCESSING STRUCTURE MEMBERS

We can access and assign values to the members of a structure in a number of ways. As mentioned earlier, the members themselves are not variables. They should be linked to the structure variables in order to make them meaningful members. For example, the word **title**, has no meaning whereas the phrase ‘title of book3’ has a meaning. The link between a member and a variable is established using the *member operator* ‘.’ which is also known as ‘dot operator’ or ‘period operator’. For example,

**book1.price**

is the variable representing the price of **book1** and can be treated like any other ordinary variable. Here is how we would assign values to the members of **book1**:

```
strcpy(book1.title, "BASIC");
strcpy(book1.author, "Balagurusamy");
book1.pages = 250;
book1.price = 120.50;
```

We can also use **scanf** to give the values through the keyboard.

```
scanf("%s\n", book1.title);
scanf("%d\n", &book1.pages);
```

are valid input statements.

**EXAMPLE 7.1** Define a structure type, struct personal that would contain person name, date of joining and salary. Using this structure, write a program to read this information for one person from the keyboard and print the same on the screen.

Structure definition along with the program is shown in Fig. 7.1. The **scanf** and **printf** functions illustrate how the member operator ‘.’ is used to link the structure members to the structure variables. The variable name with a period and the member name is used like an ordinary variable.

### Program

```
struct personal
{
 char name[20];
 int day;
 char month[10];
 int year;
 float salary;
};
main()
{
 struct personal person;
 printf("Input Values\n");
 scanf("%s %d %s %d %f",
 person.name,
 &person.day,
 person.month,
 &person.year,
 &person.salary);
```

(Contd.)

```

 printf("%s %d %s %d %f\n",
 person.name,
 person.day,
 person.month,
 person.year,
 person.salary);
 }

```

**Output**

```

Input Values
M.L.Goel 10 January 1945 4500
M.L.Goel 10 January 1945 4500.00

```

Fig. 7.1 Defining and accessing structure members

## 7.5 STRUCTURE INITIALIZATION

Like any other data type, a structure variable can be initialized at compile time.

```

main()
{
 struct
 {
 int weight;
 float height;
 }
 student = {60, 180.75};

}

```

This assigns the value 60 to **student. weight** and 180.75 to **student. height**. There is a one-to-one correspondence between the members and their initializing values.

A lot of variation is possible in initializing a structure. The following statements initialize two structure variables. Here, it is essential to use a tag name.

```

main()
{
 struct st_record
 {
 int weight;
 float height;
 };
 struct st_record student1 = { 60, 180.75 };
 struct st_record student2 = { 53, 170.60 };

}

```

Another method is to initialize a structure variable outside the function as shown below:

```

struct st_record
{
 int weight;
 float height;
} student1 = {60, 180.75};

```

## 7.6 Computer Programming

```
main()
{
 struct st_record student2 = {53, 170.60};

}
```

C language does not permit the initialization of individual structure members within the template. The initialization must be done only in the declaration of the actual variables.

Note that the compile-time initialization of a structure variable must have the following elements:

1. The keyword **struct**.
2. The structure tag name.
3. The name of the variable to be declared.
4. The assignment operator **=**.
5. A set of values for the members of the structure variable, separated by commas and enclosed in braces.
6. A terminating semicolon.

### Rules for Initializing Structures

There are a few rules to keep in mind while initializing structure variables at compile-time.

1. We cannot initialize individual members inside the structure template.
2. The order of values enclosed in braces must match the order of members in the structure definition.
3. It is permitted to have a partial initialization. We can initialize only the first few members and leave the remaining blank. The uninitialized members should be only at the end of the list.
4. The uninitialized members will be assigned default values as follows:
  - Zero for integer and floating point numbers.
  - `'\0'` for characters and strings.

## 7.6 COPYING AND COMPARING STRUCTURE VARIABLES

Two variables of the same structure type can be copied the same way as ordinary variables. If **person1** and **person2** belong to the same structure, then the following statements are valid:

```
person1 = person2;
person2 = person1;
```

However, the statements such as

```
person1 == person2
person1 != person2
```

are not permitted. C does not permit any logical operations on structure variables. In case, we need to compare them, we may do so by comparing members individually.

**EXAMPLE 7.2** Write a program to illustrate the comparison of structure variables.

The program shown in Fig. 7.2 illustrates how a structure variable can be copied into another of the same type. It also performs member-wise comparison to decide whether two structure variables are identical.

**program**

```

struct class
{
 int number;
 char name[20];
 float marks;
};

main()
{
 int x;
 struct class student1 = {111,"Rao",72.50};
 struct class student2 = {222,"Reddy", 67.00};
 struct class student3;

 student3 = student2;

 x = ((student3.number == student2.number) &&
 (student3.marks == student2.marks)) ? 1 : 0;

 if(x == 1)
 {
 printf("\nstudent2 and student3 are same\n\n");
 printf("%d %s %f\n", student3.number,
 student3.name,
 student3.marks);
 }
 else
 printf("\nstudent2 and student3 are different\n\n");
}

```

**Output**

student2 and student3 are same


222 Reddy 67.000000

**Fig. 7.2** Comparing and copying structure variables

### Word Boundaries and Slack Bytes

Computer stores structures using the concept of “word boundary”. The size of a word boundary is machine dependent. In a computer with two bytes word boundary, the members of a structure are stored left aligned on the word boundary, as shown below. A character data takes one byte and an integer takes two bytes. One byte between them is left unoccupied. This unoccupied byte is known as the *slack byte*.

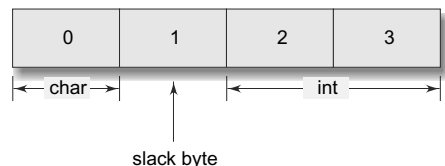When we declare structure variables, each one of them may contain slack bytes and the values stored in such slack bytes are undefined. Due to this, even if the members of two variables are equal, their structures do not necessarily compare equal. C, therefore, does not permit comparison of structures. However, we can design our own function that could compare individual members to decide whether the structures are equal or not.



## 7.7 OPERATIONS ON INDIVIDUAL MEMBERS

As pointed out earlier, the individual members are identified using the member operator, the *dot*. A member with the *dot operator* along with its structure variable can be treated like any other variable name and therefore can be manipulated using expressions and operators. Consider the program in Fig. 7.2. We can perform the following operations:

```
if (student1.number == 111)
 student1.marks += 10.00;
float sum = student1.marks + student2.marks;
student2.marks * = 0.5;
```

We can also apply increment and decrement operators to numeric type members. For example, the following statements are valid:

```
student1.number ++;
++ student1.number;
```

The precedence of the *member* operator is higher than all *arithmetic* and *relational* operators and therefore no parentheses are required.

### Three Ways to Access Members

We have used the dot operator to access the members of structure variables. In fact, there are two other ways. Consider the following structure:

```
typedef struct
{
 int x;
 int y;
} VECTOR;
VECTOR v, *ptr;
ptr = &v;
```

The identifier **ptr** is known as **pointer** that has been assigned the address of the structure variable **v**. Now, the members can be accessed in three ways:

- using dot notation : v.x
- using indirection notation : (\*ptr).x
- using selection notation : ptr -> x

The second and third methods will be considered in Chapter 14.

## 7.8 ARRAYS OF STRUCTURES

We use structures to describe the format of a number of related variables. For example, in analyzing the marks obtained by a class of students, we may use a template to describe student name and marks obtained in various subjects and then declare all the students as structure variables. In such cases, we may declare an array of structures, each element of the array representing a structure variable. For example:

```
struct class student[100];
```

defines an array called **student**, that consists of 100 elements. Each element is defined to be of the type **struct class**. Consider the following declaration:

```
struct marks
{
 int subject1;
```

```

 int subject2;
 int subject3;
};
main()
{
 struct marks student[3] =
 {{45,68,81}, {75,53,69}, {57,36,71}};

```

This declares the **student** as an array of three elements **student[0]**, **student[1]**, and **student[2]** and initializes their members as follows:

```

 student[0].subject1 = 45;
 student[0].subject2 = 65;

 student[2].subject3 = 71;

```

Note that the array is declared just as it would have been with any other array. Since **student** is an array, we use the usual array-accessing methods to access individual elements and then the member operator to access members. Remember, each element of **student** array is a structure variable with three members.

An array of structures is stored inside the memory in the same way as a multi-dimensional array. The array **student** actually looks as shown in Fig. 7.3.

|                       |    |
|-----------------------|----|
| student [0].subject 1 | 45 |
| .subject 2            | 68 |
| .subject 3            | 81 |
| student [1].subject 1 | 75 |
| .subject 2            | 53 |
| .subject 3            | 69 |
| student [2].subject 1 | 57 |
| .subject 2            | 36 |
| .subject 3            | 71 |

Fig. 7.3 The array *student* inside memory

**EXAMPLE 7.3** For the student array discussed above, write a program to calculate the subject-wise and student-wise totals and store them as a part of the structure.

The program is shown in Fig. 7.4. We have declared a four-member structure, the fourth one for keeping the student-totals. We have also declared an **array** **total** to keep the subject-totals and the grand-total. The grand-total is given by **total.total**. Note that a member name can be any valid C name and can be the same as an existing structure variable name. The linked name **total.total** represents the **total** member of the structure variable **total**.

## 7.10 Computer Programming

### Program

```
struct marks
{
 int sub1;
 int sub2;
 int sub3;
 int total;
};
main()
{
 int i;
 struct marks student[3] = {{45,67,81,0},
 {75,53,69,0},
 {57,36,71,0}};

 struct marks total;
 for(i = 0; i <= 2; i++)
 {
 student[i].total = student[i].sub1 +
 student[i].sub2 +
 student[i].sub3;
 total.sub1 = total.sub1 + student[i].sub1;
 total.sub2 = total.sub2 + student[i].sub2;
 total.sub3 = total.sub3 + student[i].sub3;
 total.total = total.total + student[i].total;
 }
 printf(" STUDENT TOTAL\n\n");
 for(i = 0; i <= 2; i++)
 printf("Student[%d] %d\n", i+1, student[i].total);
 printf("\n SUBJECT TOTAL\n\n");
 printf("%s %d\n%s %d\n%s %d\n",
 "Subject 1 ", total.sub1,
 "Subject 2 ", total.sub2,
 "Subject 3 ", total.sub3);

 printf("\nGrand Total = %d\n", total.total);
}
```

### Output

| STUDENT    | TOTAL |
|------------|-------|
| Student[1] | 193   |
| Student[2] | 197   |
| Student[3] | 164   |

| SUBJECT   | TOTAL |
|-----------|-------|
| Subject 1 | 177   |
| Subject 2 | 156   |
| Subject 3 | 221   |

Grand Total = 554

**Fig. 7.4** Arrays of structures: Illustration of subscripted structure variables



## 7.9 ARRAYS WITHIN STRUCTURES

C permits the use of arrays as structure members. We have already used arrays of characters inside a structure. Similarly, we can use single-dimensional or multi-dimensional arrays of type **int** or **float**. For example, the following structure declaration is valid:

```
struct marks
{
 int number;
 float subject[3];
} student[2];
```

Here, the member **subject** contains three elements, **subject[0]**, **subject[1]** and **subject[2]**. These elements can be accessed using appropriate subscripts. For example, the name

**student[1].subject[2];**

would refer to the marks obtained in the third subject by the second student.

**EXAMPLE 7.4** Rewrite the program of Example 7.3 using an array member to represent the three subjects.

The modified program is shown in Fig. 7.5. You may notice that the use of array name for subjects has simplified in code.

```
Program
main()
{
 struct marks
 {
 int sub[3];
 int total;
 };
 struct marks student[3] =
 {45,67,81,0,75,53,69,0,57,36,71,0};

 struct marks total;
 int i,j;

 for(i = 0; i <= 2; i++)
 {
 for(j = 0; j <= 2; j++)
 {
 student[i].total += student[i].sub[j];
 total.sub[j] += student[i].sub[j];
 }
 total.total += student[i].total;
 }
 printf("STUDENT TOTAL\n\n");
 for(i = 0; i <= 2; i++)
```

(Contd.)

## 7.12 Computer Programming

```
 printf("Student[%d] %d\n", i+1, student[i].total);

 printf("\nSUBJECT TOTAL\n\n");
 for(j = 0; j <= 2; j++)
 printf("Subject-%d %d\n", j+1, total.sub[j]);

 printf("\nGrand Total = %d\n", total.total);
}
Output
```

| STUDENT    | TOTAL |
|------------|-------|
| Student[1] | 193   |
| Student[2] | 197   |
| Student[3] | 164   |

| STUDENT       | TOTAL |
|---------------|-------|
| Student-1     | 177   |
| Student-2     | 156   |
| Student-3     | 221   |
| Grand Total = | 554   |

**Fig. 7.5** Use of subscripted members arrays in structures

## 7.10 STRUCTURES WITHIN STRUCTURES

Structures within a structure means *nesting* of structures. Nesting of structures is permitted in C. Let us consider the following structure defined to store information about the salary of employees.

```
struct salary
{
 char name;
 char department;
 int basic_pay;
 int dearness_allowance;
 int house_rent_allowance;
 int city_allowance;
}
employee;
```

This structure defines name, department, basic pay and three kinds of allowances. We can group all the items related to allowance together and declare them under a substructure as shown below:

```
struct salary
{
 char name;
 char department;
 struct
 {
 int dearness;
 int house_rent;
 int city;
 }
}
```

```

 allowance;
 }
 employee;

```

The salary structure contains a member named **allowance**, which itself is a structure with three members. The members contained in the inner structure namely **dearness**, **house\_rent**, and **city** can be referred to as:

```

employee.allowance.dearness
employee.allowance.house_rent
employee.allowance.city

```

An inner-most member in a nested structure can be accessed by chaining all the concerned structure variables (from outer-most to inner-most) with the member using dot operator. The following are invalid:

```

employee.allowance (actual member is missing)
employee.house_rent (inner structure variable is missing)

```

An inner structure can have more than one variable. The following form of declaration is legal:

```

struct salary
{

 struct
 {
 int dearness;

 }
 allowance,
 arrears;
}
employee[100];

```

The inner structure has two variables, **allowance** and **arrears**. This implies that both of them have the same structure template. Note the comma after the name **allowance**. A base member can be accessed as follows:

```

employee[1].allowance.dearness
employee[1].arrears.dearness

```

We can also use tag names to define inner structures. Example:

```

struct pay
{
 int dearness;
 int house_rent;
 int city;
};
struct salary
{
 char name;
 char department;
 struct pay allowance;
 struct pay arrears;
};
struct salary employee[100];

```

**pay** template is defined outside the **salary** template and is used to define the structure of **allowance** and **arrears** inside the **salary** structure.

It is also permissible to nest more than one type of structures.

## 7.14 Computer Programming

```
struct personal_record
{
 struct name_part name;
 struct addr_part address;
 struct date date_of_birth;

};
struct personal_record person1;
```

The first member of this structure is **name**, which is of the type **struct name\_part**. Similarly, other members have their structure types.



**NOTE:** C permits nesting up to 15 levels. However, C99 allows 63 levels of nesting.

## 7.11 STRUCTURES AND FUNCTIONS

We know that the main philosophy of C language is the use of functions. And therefore, it is natural that C supports the passing of structure values as arguments to functions. There are three methods by which the values of a structure can be transferred from one function to another.

1. The first method is to pass each member of the structure as an actual argument of the function call. The actual arguments are then treated independently like ordinary variables. This is the most elementary method and becomes unmanageable and inefficient when the structure size is large.
2. The second method involves passing of a copy of the entire structure to the called function. Since the function is working on a copy of the structure, any changes to structure members within the function are not reflected in the original structure (in the calling function). It is, therefore, necessary for the function to return the entire structure back to the calling function. All compilers may not support this method of passing the entire structure as a parameter.
3. The third approach employs a concept called *pointers* to pass the structure as an argument. In this case, the address location of the structure is passed to the called function. The function can access indirectly the entire structure and work on it. This is similar to the way arrays are passed to function. This method is more efficient as compared to the second one.

In this section, we discuss in detail the second method, while the third approach using pointers is discussed in the next chapter, where pointers are dealt in detail.

The general format of sending a copy of a structure to the called function is:

```
function_name (structure_variable_name);
```

The called function takes the following form:

```
data_type function_name(struct_type st_name)
{

 return(expression);
}
```

The following points are important to note:

1. The called function must be declared for its type, appropriate to the data type it is expected to return. For example, if it is returning a copy of the entire structure, then it must be declared as **struct** with an appropriate tag name.

2. The structure variable used as the actual argument and the corresponding formal argument in the called function must be of the same **struct** type.
3. The **return** statement is necessary only when the function is returning some data back to the calling function. The *expression* may be any simple variable or structure variable or an expression using simple variables.
4. When a function returns a structure, it must be assigned to a structure of identical type in the calling function.
5. The called functions must be declared in the calling function appropriately.

**EXAMPLE 7.5** Write a simple program to illustrate the method of sending an entire structure as a parameter to a function.

A program to update an item is shown in Fig. 7.6. The function **update** receives a copy of the structure variable **item** as one of its parameters. Note that both the function **update** and the formal parameter **product** are declared as type **struct stores**. It is done so because the function uses the parameter **product** to receive the structure variable **item** and also to return the updated values of **item**.

The function **mul** is of type **float** because it returns the product of **price** and **quantity**. However, the parameter **stock**, which receives the structure variable **item** is declared as type **struct stores**.

The entire structure returned by **update** can be copied into a structure of identical type. The statement

```
item = update(item,p_increment,q_increment);
```

replaces the old values of **item** by the new ones.

**Program**

```
/* Passing a copy of the entire structure */
struct stores
{
 char name[20];
 float price;
 int quantity;
};
struct stores update (struct stores product, float p, int q);
float mul (struct stores stock);
main()
{
 float p_increment, value;
 int q_increment;

 struct stores item = {"XYZ", 25.75, 12};

 printf("\nInput increment values:");
 printf(" price increment and quantity increment\n");
 scanf("%f %d", &p_increment, &q_increment);

 /* ----- */
 item = update(item, p_increment, q_increment);
 /* ----- */
 printf("Updated values of item\n\n");
```

(Contd.)

## 7.16 Computer Programming

```
 printf("Name : %s\n",item.name);
 printf("Price : %f\n",item.price);
 printf("Quantity : %d\n",item.quantity);
 /* ----- */
 value = mul(item);
 /* ----- */
 printf("\nValue of the item = %f\n", value);
}
struct stores update(struct stores product, float p, int q)
{
 product.price += p;
 product.quantity += q;
 return(product);
}
float mul(struct stores stock)
{
 return(stock.price * stock.quantity);
}
```

### Output

```
Input increment values: price increment and quantity increment
10 12
Updated values of item
Name : XYZ
Price : 35.750000
Quantity : 24
Value of the item = 858.000000
```

**Fig. 7.6** Using structure as a function parameter

You may notice that the template of **stores** is defined before **main()**. This has made the data type **struct stores** as *global* and has enabled the functions **update** and **mul** to make use of this definition.

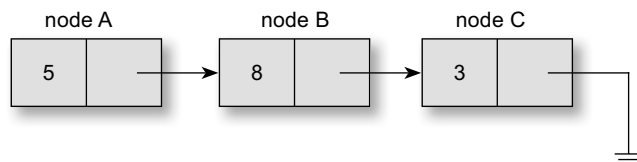
### Self Referential Structure

Self referential structure is a Structure that has a pointer to itself. Pointer stores the address of the Structure of same type.

```
struct struct_name
{
 datatype datatype_name;
 struct_name * pointer_name;
}
```

Self-Referential Structure allow to create data structures that contains references to data of the same type as themselves.

```
struct node {
 int value;
 struct node *next;
};
```



## 7.12 UNIONS

Unions are a concept borrowed from structures and therefore follow the same syntax as structures. However, there is major distinction between them in terms of storage. In structures, each member has its own storage location, whereas all the members of a union use the same location. This implies that, although a union may contain many members of different types, it can handle only one member at a time. Like structures, a union can be declared using the keyword `union` as follows:

```
union item
{
 int m;
 float x;
 char c;
} code;
```

This declares a variable **code** of type **union item**. The union contains three members, each with a different data type. However, we can use only one of them at a time. This is due to the fact that only one location is allocated for a union variable, irrespective of its size.

The compiler allocates a piece of storage that is large enough to hold the largest variable type in the union. In the declaration above, the member `x` requires 4 bytes which is the largest among the members. Figure 7.7 shows how all the three variables share the same address. This assumes that a float variable requires 4 bytes of storage.

To access a union member, we can use the same syntax that we use for structure members. That is,

```
code.m
code.x
code.c
```

are all valid member variables. During accessing, we should make sure that we are accessing the member whose value is currently stored. For example, the statements such as

```
code.m = 379;
code.x = 7859.36;
printf("%d", code.m);
```

would produce erroneous output (which is machine dependent).

In effect, a union creates a storage location that can be used by any one of its members at a time. When a different member is assigned a new value, the new value supersedes the previous member's value.

Unions may be used in all places where a structure is allowed. The notation for accessing a union member which is nested inside a structure remains the same as for the nested structures.


Unions may be initialized when the variable is declared. But, unlike structures, it can be initialized only with a value of the same type as the first union member. For example, with the preceding, the declaration

```
union item abc = {100};
```

is valid but the declaration

```
union item abc = {10.75};
```

is invalid. This is because the type of the first member is **int**. Other members can be initialized by either assigning values or reading from the keyboard.

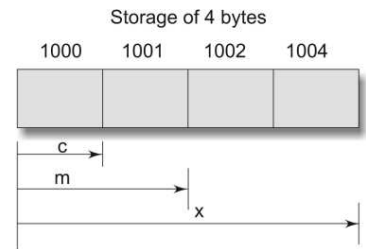

**Fig. 7.7** Sharing of a storage locating by union members

## 7.13 SIZE OF STRUCTURES

We normally use structures, unions, and arrays to create variables of large sizes. The actual size of these variables in terms of bytes may change from machine to machine. We may use the unary operator **sizeof** to tell us the size of a structure (or any variable). The expression

**sizeof(struct x)**

will evaluate the number of bytes required to hold all the members of the structure **x**. If **y** is a simple structure variable of type **struct x**, then the expression

**sizeof(y)**

would also give the same answer. However, if **y** is an array variable of type **struct x**, then

**sizeof(y)**

would give the total number of bytes the array **y** requires.

This kind of information would be useful to determine the number of records in a database. For example, the expression

**sizeof(y)/sizeof(x)**

would give the number of elements in the array **y**.

## 7.14 BIT FIELDS

So far, we have been using integer fields of size 16 bits to store data. There are occasions where data items require much less than 16 bits space. In such cases, we waste memory space. Fortunately, C permits us to use small *bit fields* to hold data items and thereby to pack several data items in a word of memory. Bit fields allow direct manipulation of string of a string of preselected bits as if it represented an integral quantity.

A *bit field* is a set of adjacent bits whose size can be from 1 to 16 bits in length. A word can therefore be divided into a number of bit fields. The name and size of bit fields are defined using a structure. The general form of bit field definition is:


```
struct tag-name
{
 data-type name1: bit-length;
 data-type name2: bit-length;

 data-type nameN: bit-length;
}
```

The *data-type* is either **int** or **unsigned int** or **signed int** and the *bit-length* is the number of bits used for the specified name. Remember that a **signed** bit field should have at least 2 bits (one bit for sign). Note that the field name is followed by a colon. The *bit-length* is decided by the range of value to be stored. The largest value that can be stored is  $2^{n-1}$ , where **n** is bit-length.

The internal representation of bit fields is machine dependent. That is, it depends on the size of **int** and the ordering of bits. Some machines store bits from left to right and others from right to left. The sketch below illustrates the layout of bit fields, assuming a 16-bit word that is ordered from right to left.





There are several specific points to observe:

1. The first field always starts with the first bit of the word.
2. A bit field cannot overlap integer boundaries. That is, the sum of lengths of all the fields in a structure should not be more than the size of a word. In case, it is more, the overlapping field is automatically forced to the beginning of the next word.
3. There can be unnamed fields declared with size. Example:

**Unsigned :**            *bit-length*

Such fields provide padding within the word.

4. There can be unused bits in a word.
5. We cannot take the address of a bit field variable. This means we cannot use **scanf** to read values into bit fields. We can neither use pointer to access the bit fields.
6. Bit fields cannot be arrayed.
7. Bit fields should be assigned values that are within the range of their size. If we try to assign larger values, behavior would be unpredicted.

Suppose, we want to store and use personal information of employees in compressed form, this can be done as follows:

```
struct personal
{
 unsigned sex : 1
 unsigned age : 7
 unsigned m_status : 1
 unsigned children : 3
 unsigned : 4
} emp;
```

This defines a variable name **emp** with four bit fields. The range of values each field could have is follows:

| <i>Bit field</i> | <i>Bit length</i> | <i>Range of value</i>  |
|------------------|-------------------|------------------------|
| Sex              | 1                 | 0 or 1                 |
| Age              | 7                 | 0 or 127 ( $2^7 - 1$ ) |
| m_status         | 1                 | 0 or 1                 |
| children         | 3                 | 0 to 7 ( $2^3 - 1$ )   |

Once bit fields are defined, they can be referenced just as any other structure-type data item would be referenced. The following assignment statements are valid.

```
emp.sex = 1;
emp.age = 50;
```

Remember, we cannot use **scanf** to read values into a bit field. We may have to read into a temporary variable and then assign its value to the bit field. For example:

```
scanf("%d %d", &AGE,&CHILDREN);
```

## 7.20 Computer Programming

```
emp.age = AGE;
emp.children = CHILDREN;
```

One restriction in accessing bit fields is that a pointer cannot be used. However, they can be used in normal expressions like any other variable. For example:

```
sum = sum + emp.age;
if(emp.m_status). . . .;
printf("%d\n", emp.age);
```

are valid statements.

It is possible to combine normal structure elements with bit field elements. For example:

```
struct personal
{
 char name[20]; /* normal variable */
 struct addr address; /* structure variable */
 unsigned sex : 1;
 unsigned age : 7;

}
emp[100];
```

This declares **emp** as a 100 element array of type **struct personal**. This combines normal variable name and structure type variable **address** with bit fields.

Bit fields are packed into words as they appear in the definition. Consider the following definition.

```
struct pack
{
 unsigned a:2;
 int count;
 unsigned b : 3;
};
```

Here, the bit field **a** will be in one word, the variable **count** will be in the second word and the bit field **b** will be in the third word. The fields **a** and **b** would not get packed into the same word.

## 7.15 TYPEDEF

C supports a feature known as “type definition” that allows users to define an identifier that would represent an existing data type. The user-defined data type identifier can later be used to declare variables. It takes the general form:

```
typedef type identifier;
```

Where *type* refers to an existing data type and “identifier” refers to the “new” name given to the data type. The existing data type may belong to any class of type, including the user-defined ones. Remember that the new type is ‘new’ only in name, but not the data type. **typedef** cannot create a new type. Some examples of type definition are:

```
typedef int units;
typedef float marks;
```

## 7.16 ENUM

enum is a user-defined enumerated data type supported by ANSI C.

It is defined as follows:

```
enum identifier {value1, value2, ... valuen};
```

The “identifier” is a user-defined enumerated data type which can be used to declare variables that can have one of the values enclosed within the braces (known as *enumeration constants*). After this definition, we can declare variables to be of this ‘new’ type as below:

```
enum identifier v1, v2, ... vn;
```

The enumerated variables v1, v2, ... vn can only have one of the values *value1*, *value2*, ... *valuen*. The assignments of the following types are valid:

```
v1 = value3;
v5 = value1;
```

An example:

```
enum day {Monday, Tuesday, ... Sunday};
enum day week_st, week_end;
week_st = Monday;
week_end = Friday;
if(week_st == Tuesday)
 week_end = Saturday;
```

The compiler automatically assigns integer digits beginning with 0 to all the enumeration constants. That is, the enumeration constant value1 is assigned 0, value2 is assigned 1, and so on. However, the automatic assignments can be overridden by assigning values explicitly to the enumeration constants. For example:

```
enum day {Monday = 1, Tuesday, ... Sunday};
```

Here, the constant Monday is assigned the value of 1. The remaining constants are assigned values that increase successively by 1.

The definition and declaration of enumerated variables can be combined in one statement. Example:

```
enum day {Monday, ... Sunday} week_st, week_end;
```

### Just Remember

- Remember to place a semicolon at the end of definition of structures and unions.
- We can declare a structure variable at the time of definition of a structure by placing it after the closing brace but before the semicolon.
- Do not place the structure tag name after the closing brace in the definition. That will be treated as a structure variable. The tag name must be placed before the opening brace but after the keyword **struct**.
- When we use **typedef** definition, the *type\_name* comes after the closing brace but before the semicolon.
- We cannot declare a variable at the time of creating a **typedef** definition. We must use the *type\_name* to declare a variable in an independent statement.
- It is an error to use a structure variable as a member of its own **struct** type structure.
- Assigning a structure of one type to a structure of another type is an error.
- Declaring a variable using the tag name only (without the keyword **struct**) is an error.
- It is an error to compare two structure variables.

## 7.22 Computer Programming

- It is illegal to refer to a structure member using only the member name.
- When structures are nested, a member must be qualified with all levels of structures nesting it.
- When accessing a member with a pointer and dot notation, parentheses are required around the pointer, like `(*ptr).number`.
- The selection operator `(->)` is a single token. Any space between the symbols `-` and `>` is an error.
- When using **scanf** for reading values for members, we must use address operator `&` with non-string members.
- Forgetting to include the array subscript when referring to individual structures of an array of structures is an error.
- A union can store only one of its members at a time. We must exercise care in accessing the correct member. Accessing a wrong data is a logic error.
- It is an error to initialize a union with data that does not match the type of the first member.
- Always provide a structure tag name when creating a structure. It is convenient to use tag name to declare new structure variables later in the program.
- Use short and meaningful structure tag names.
- Avoid using same names for members of different structures (although it is not illegal).
- Passing structures to functions by pointers is more efficient than passing by value. (Passing by pointers are discussed in Chapter 12.)
- We cannot take the address of a bit field. Therefore, we cannot use **scanf** to read values in bit fields. We can neither use pointer to access the bit fields.
- Bit fields cannot be arrayed.
- Structures and unions give the programmer the liberty of creating user-defined complex data types.
- The size of a structure variable can be computed by adding the storage space of each of its member variables.
- The initialization of a structure variable can also be done at the time of its declaration by using the assignment operator `'='` and placing the initial values inside braces, separated by commas.
- The uninitialized structure members are assigned the value zero for integer and float and `'\0'` for characters and strings.
- Nesting of structures is possible by declaring a structure inside another structure.

---

## Multiple Choice Questions

---

- |                                                                            |                                                  |
|----------------------------------------------------------------------------|--------------------------------------------------|
| 1. A structure stores which of the following?                              | <pre>{ Datatype 1 Datatype 2 }</pre>             |
| (a) Multiple values of the same type                                       |                                                  |
| (b) Multiple values of different types                                     |                                                  |
| (c) Multiple values of the same user-defined type                          | (c) <pre>struct { Datatype 1 Datatype 2 };</pre> |
| (d) None of the above                                                      |                                                  |
| 2. Which of the following is the correct syntax for declaring a structure? | (d) <pre>struct; { Datatype 1 Datatype 2 }</pre> |
| (a) <pre>struct ( Datatype 1 Datatype 2 );</pre>                           |                                                  |
| (b) <pre>struct</pre>                                                      |                                                  |

3. Which of the following is the incorrect way of declaring structure type variables?
- (a) `struct book`  
`{`  
`Datatypes`  
`}book1, book2;`
- (b) `struct book`  
`{`  
`Datatypes`  
`};`  
`Struct book book1, book2;`
- (c) `struct book1, book2`  
`{`  
`Datatype`  
`};`
- (d) All of the above are correct
4. Which of the following is the correct way of assigning a value to the 'name' field of a structure 'book'?
- (a) `book.name`                      (b) `book->name`  
(c) `book(name)`                      (d) None of the above
5. The uninitialized integer data type of a structure contains which of the following default values?
- (a) garbage                              (b) zero  
(c) one                                      (d) None of the above
6. The uninitialized character data type of a structure contains which of the following default values?
- (a) garbage                              (b) zero  
(c) `'\0'`                                      (d) None of the above
7. Which of the following expressions are correct for accessing the 'num' variable value of the ith element of a structure array 'student'?
- (a) `student[i].num`                      (b) `student.num[i]`  
(c) `student[i]->num`                      (d) None of the above
8. C allows nesting of structures till which level?
- (a) 13                                      (b) 14  
(c) 15                                      (d) 16
9. In the following union declaration, what will be the size of a union variable?
- ```
union item
{
    int a;
    float b;
    char c;
} item 1;
```
- (a) 1 (b) 2
(c) 4 (d) 8
10. Which of the following is the correct way of representing the selection statement?
- (a) `->`
(b) `'`
(c) `- >`
(d) All of the above are correct
11. Which of the following is the correct way of declaring a variable of bit size 1?
- (a) `unsigned b:1;`
(b) `unsigned b(1);`
(c) `unsigned b->sizeof(1)`
(d) None of the above

Case Study

Book Shop Inventory

A book shop uses a personal computer to maintain the inventory of books that are being sold at the shop. The list includes details such as author, title, price, publisher, stock position, etc. Whenever a customer wants a book, the shopkeeper inputs the title and author of the book and the system replies whether it is in the list or not. If it is not, an appropriate message is displayed. If book is in the list, then the system displays the book details and asks for number of copies. If the requested copies are available, the total cost of the books is displayed; otherwise the message "Required copies not in stock" is displayed.

A program to accomplish this is shown in Fig. 7.8. The program uses a template to define the structure of the book. Note that the date of publication, a member of **record** structure, is also defined as a structure.

7.24 Computer Programming

Programs

```
#include <stdio.h>
#include <string.h>
struct record
{
    char    author[20];
    char    title[30];
    float   price;
    struct
    {
        char    month[10];
        int     year;
    }
    date;
    char    publisher[10];
    int     quantity;
};
int look_up(struct record table[],char s1[],char s2[],int m);
void get (char string [ ] );
main()
{
    char title[30], author[20];
    int  index, no_of_records;
    char response[10], quantity[10];
    struct record book[] = {
        {"Ritche","C Language",45.00,"May",1977,"PHI",10},
        {"Kochan","Programming in C",75.50,"July",1983,"Hayden",5},
        {"Balagurusamy","BASIC",30.00,"January",1984,"TMH",0},
        {"Balagurusamy","COBOL",60.00,"December",1988,"Macmillan",25}
    };

    no_of_records = sizeof(book)/ sizeof(struct record);
    do
    {
        printf("Enter title and author name as per the list\n");
        printf("\nTitle:   ");
        get(title);
        printf("Author:   ");
        get(author);
        index = look_up(book, title, author, no_of_records);
        if(index != -1)    /* Book found */
        {
            printf("\n%s %s %.2f %s %d %s\n\n",
                book[index].author,
                book[index].title,
                book[index].price,
                book[index].date.month,
                book[index].date.year,
                book[index].publisher);

            printf("Enter number of copies:");
```

(Contd.)

```

        get(quantity);
        if(atoi(quantity) < book[index].quantity)
            printf("Cost of %d copies = %.2f\n",atoi(quantity),
                book[index].price * atoi(quantity));
        else
            printf("\nRequired copies not in stock\n\n");
    }
    else
        printf("\nBook not in list\n\n");
    printf("\nDo you want any other book? (YES / NO):");
    get(response);
}
while(response[0] == 'Y' || response[0] == 'y');
printf("\n\nThank you. Good bye!\n");
}
void get(char string [])
{
    char c;
    int i = 0;
    do
    {
        c = getchar();
        string[i++] = c;
    }
    while(c != '\n');
    string[i-1] = '\0';
}

int look_up(struct record table[],char s1[],char s2[],int m)
{
    int i;
    for(i = 0; i < m; i++)
        if(strcmp(s1, table[i].title) == 0 &&
            strcmp(s2, table[i].author) == 0)
            return(i);          /* book found      */
    return(-1);                 /* book not found */
}

```

Output

```

Enter title and author name as per the list
Title:  BASIC
Author:  Balagurusamy
Balagurusamy BASIC 30.00 January 1984 TMH
Enter number of copies:5
Required copies not in stock
Do you want any other book? (YES / NO):y
Enter title and author name as per the list
Title:  COBOL
Author:  Balagurusamy
Balagurusamy COBOL 60.00 December 1988 Macmillan
Enter number of copies:7

```

(Contd.)

7.26 Computer Programming

```
Cost of 7 copies = 420.00

Do you want any other book? (YES / NO):y
Enter title and author name as per the list
Title:    C Programming
Author:    Ritche

Book not in list
Do you want any other book? (YES / NO):n

Thank you. Good bye!
```

Fig. 7.8 Program of bookshop inventory

When the title and author of a book are specified, the program searches for the book in the list using the function

look_up(table, s1, s2, m)

The parameter **table** which receives the structure variable **book** is declared as type **struct record**. The parameters **s1** and **s2** receive the string values of **title** and **author** while **m** receives the total number of books in the list. Total number of books is given by the expression

sizeof(book)/sizeof(struct record)

The search ends when the book is found in the list and the function returns the serial number of the book. The function returns **-1** when the book is not found. Remember that the serial number of the first book in the list is zero. The program terminates when we respond “NO” to the question

Do you want any other book?

Note that we use the function

get(string)

to get title, author, etc. from the terminal. This enables us to input strings with spaces such as “C Language”. We cannot use **scanf** to read this string since it contains two words.

Since we are reading the quantity as a string using the **get(string)** function, we have to convert it to an integer before using it in any expressions. This is done using the **atoi()** function.

Review Questions

- 7.1 State whether the following statements are *true* or *false*.
- (a) A **struct** type in C is a built-in data type.
 - (b) The tag name of a structure is optional.
 - (c) Structures may contain members of only one data type.
 - (d) A structure variable is used to declare a data type containing multiple fields.
 - (e) It is legal to copy a content of a structure variable to another structure variable of the same type.
 - (f) Structures are always passed to functions by printers.
 - (g) Pointers can be used to access the members of structure variables.

- (h) We can perform mathematical operations on structure variables that contain only numeric type members.
- (i) The keyword **typedef** is used to define a new data type.
- (j) In accessing a member of a structure using a pointer *p*, the following two are equivalent:
 (*p).member_name and p -> member_name
- (k) A union may be initialized in the same way a structure is initialized.
- (l) A union can have another union as one of the members.
- (m) A structure cannot have a union as one of its members.
- (n) An array cannot be used as a member of a structure.
- (o) A member in a structure can itself be a structure.
- 7.2 Fill in the blanks in the following statements:
- (a) The _____ can be used to create a synonym for a previously defined data type.
- (b) A _____ is a collection of data items under one name in which the items share the same storage.
- (c) The name of a structure is referred to as _____.
- (d) The selection operator -> requires the use of a _____ to access the members of a structure.
- (e) The variables declared in a structure definition are called its _____.
- 7.3 A structure tag name **abc** is used to declare and initialize the structure variables of type **struct abc** in the following statements. Which of them are incorrect? Why? Assume that the structure **abc** has three members, **int**, **float** and **char** in that order.
- (a) struct a,b,c;
- (b) struct abc a,b,c
- (c) abc x,y,z;
- (d) struct abc a[];
- (e) struct abc a = { };
- (f) struct abc = b, { 1+2, 3.0, "xyz"}
- (g) struct abc c = {4,5,6};
- (h) struct abc a = 4, 5.0, "xyz";
- 7.4 Given the declaration struct abc a,b,c; which of the following statements are legal?
- (a) scanf ("%d, &a);
- (b) printf ("%d", b);
- (c) a = b;
- (d) a = b + c;
- (e) if (a>b)
-
- 7.5 Given the declaration
- ```
struct item_bank
{
 int number;
 double cost;
};
```
- which of the following are correct statements for declaring one dimensional array of structures of type **struct item\_bank**?
- (a) int item\_bank items[10];
- (b) struct items[10] item\_bank;
- (c) struct item\_bank items (10);
- (d) struct item\_bank items [10];
- (e) struct items item\_bank [10];
- 7.6 Given the following declaration
- ```
typedef struct abc
{
    char x;
    int y;
    float z[10];
} ABC;
```
- State which of the following declarations are invalid? Why?
- (a) struct abc v1;
- (b) struct abc v2[10];
- (c) struct ABC v3;
- (d) ABC a,b,c;
- (e) ABC a[10];
- 7.7 How does a structure differ from an array?
- 7.8 Explain the meaning and purpose of the following:
- (a) Template
- (b) **struct** keyword
- (c) **typedef** keyword
- (d) **sizeof** operator
- (e) Tag name

7.28 Computer Programming

- 7.9 Explain what is wrong in the following structure declaration:
- ```
struct
{
 int number;
 float price;
}
main()
{

}
```
- 7.10 When do we use the following?
- (a) Unions
  - (b) Bit fields
  - (c) The **sizeof** operator
- 7.11 What is meant by the following terms?
- (a) Nested structures
  - (b) Array of structures
- Give a typical example of use of each of them.
- 7.12 Given the structure definitions and declarations
- ```
struct abc
{
    int a;
    float b;
};
struct xyz
{
    int x;
    float y;
};
abc a1, a2;
xyz x1, x2;
```
- find errors, if any, in the following statements:
- (a) `a1 = x1;`
 - (b) `abc.a1 = 10.75;`
 - (c) `int m = a + x;`
 - (d) `int n = x1.x + 10;`
 - (e) `a1 = a2;`
 - (f) `if (a.a1 > x.x1) . . .`
 - (g) `if (a1.a < x1.x) . . .`
 - (h) `if (x1 != x2) . . .`
- 7.13 Describe with examples, the different ways of assigning values to structure members.
- 7.14 State the rules for initializing structures.
- 7.15 What is a 'slack byte'? How does it affect the implementation of structures?
- 7.16 Describe three different approaches that can be used to pass structures as function arguments.
- 7.17 What are the important points to be considered when implementing bit-fields in structures?
- 7.18 Define a structure called **complex** consisting of two floating-point numbers **x** and **y** and declare a variable **p** of type **complex**. Assign initial values 0.0 and 1.1 to the members.
- 7.19 What is the error in the following program?
- ```
typedef struct product
{
 char name [10];
 float price ;
} PRODUCT products [10];
```
- 7.20 What will be the output of the following program?
- ```
main ( )
{
    union x
    {
        int a;
        float b;
        double c ;
    };
    printf("%d\n", sizeof(x));
    a.x = 10;
    printf("%d%f%f\n", a.x, b.x, c.x);
    c.x = 1.23;
    printf("%d%f%f\n", a.x, b.x, c.x);
}
```

Programming Exercises

- 7.1 Define a structure data type called **time_struct** containing three members integer **hour**, integer **minute** and integer **second**. Develop a program that would assign values to the individual members and display the time in the following form:
- 16:40:51

- 7.2 Modify the above program such that a function is used to input values to the members and another function to display the time.
- 7.3 Design a function **update** that would accept the data structure designed in Exercise 7.1 and increments time by one second and returns the new time. (If the increment results in 60 seconds, then the second member is set to zero and the minute member is incremented by one. Then, if the result is 60 minutes, the minute member is set to zero and the hour member is incremented by one. Finally when the hour becomes 24, it is set to zero.)
- 7.4 Define a structure data type named **date** containing three integer members **day**, **month** and **year**. Develop an interactive modular program to perform the following tasks;
- To read data into structure members by a function
 - To validate the date entered by another function
 - To print the date in the format
April 29, 2002
- by a third function.
The input data should be three integers like 29, 4, and 2002 corresponding to day, month and year. Examples of invalid data:
31, 4, 2002 – April has only 30 days
29, 2, 2002 – 2002 is not a leap year
- 7.5 Design a function **update** that accepts the **date** structure designed in Exercise 7.4 to increment the date by one day and return the new date. The following rules are applicable:
- If the date is the last day in a month, month should be incremented
 - If it is the last day in December, the year should be incremented
 - There are 29 days in February of a leap year
- 7.6 Modify the input function used in Exercise 7.4 such that it reads a value that represents the date in the form of a long integer, like 19450815 for the date 15-8-1945 (August 15, 1945) and assigns suitable values to the members **day**, **month** and **year**.
Use suitable algorithm to convert the long integer 19450815 into year, month and day.
- 7.7 Add a function called **nextdate** to the program designed in Exercise 7.4 to perform the following task;
- Accepts two arguments, one of the structure **data** containing the present date and the second an integer that represents the number of days to be added to the present date.
 - Adds the days to the present date and returns the structure containing the next date correctly.
- Note that the next date may be in the next month or even the next year.
- 7.8 Use the **date** structure defined in Exercise 7.4 to store two dates. Develop a function that will take these two dates as input and compares them.
- It returns 1, if the **date1** is earlier than **date2**
 - It returns 0, if **date1** is later date
- 7.9 Define a structure to represent a vector (a series of integer values) and write a modular program to perform the following tasks:
- To create a vector
 - To modify the value of a given element
 - To multiply by a scalar value
 - To display the vector in the form (10, 20, 30,)
- 7.10 Add a function to the program of Exercise 7.9 that accepts two vectors as input parameters and return the addition of two vectors.
- 7.11 Create two structures named **metric** and **British** which store the values of distances. The **metric** structure stores the values in meters and centimeters and the British structure stores the values in feet and inches. Write a program that reads values for the structure variables and adds values contained in one variable of **metric** to the contents of another variable of **British**. The program should display the result in the format of

7.30 Computer Programming

feet and inches or metres and centimetres as required.

- 7.12 Define a structure named **census** with the following three members:
- A character array `city []` to store names
 - A long integer to store population of the city
 - A float member to store the literacy level

Write a program to do the following:

- To read details for 5 cities randomly using an array variable
- To sort the list alphabetically
- To sort the list based on literacy level
- To sort the list based on population
- To display sorted lists

- 7.13 Define a structure that can describe a hotel. It should have members that include the name, address, grade, average room charge, and number of rooms.

Write functions to perform the following operations:

- To print out hotels of a given grade in order of charges
- To print out hotels with room charges less than a given value

- 7.14 Define a structure called **cricket** that will describe the following information:

player name
team name
batting average

Using **cricket**, declare an array **player** with 50 elements and write a program to read the information about all the 50 players and print a team-wise list containing names of players with their batting average.

- 7.15 Design a structure **student_record** to contain name, date of birth and total marks obtained. Use the **date** structure designed in Exercise 7.4 to represent the date of birth. Develop a program to read data for 10 students in a class and list them rank-wise.

Key Terms

- **Array:** It is a collection of related data elements of same type.
- **Structure:** It is a collection of related data elements of different types.
- **Dot operator:** It is a member operator used to identify the individual members in a structure.
- **Union:** It is a collection of many members of different types.
- **Bit field:** It is a set of adjacent bits that holds data items and packs several data items in a word of memory.

UNIT 8

File Handling

8.1 INTRODUCTION

Until now we have been using the functions such as **scanf** and **printf** to read and write data. These are console oriented I/O functions, which always use the terminal (keyboard and screen) as the target place. This works fine as long as the data is small. However, many real-life problems involve large volumes of data and in such situations, the console oriented I/O operations pose two major problems.

1. It becomes cumbersome and time consuming to handle large volumes of data through terminals.
2. The entire data is lost when either the program is terminated or the computer is turned off.

It is therefore necessary to have a more flexible approach where data can be stored on the disks and read whenever necessary, without destroying the data. This method employs the concept of *files* to store data. A file is a place on the disk where a group of related data is stored. Like most other languages, C supports a number of functions that have the ability to perform basic file operations, which include:

- naming a file,
- opening a file,
- reading data from a file,
- writing data to a file, and
- closing a file.

There are two distinct ways to perform file operations in C. The first one is known as the *low-level* I/O and uses UNIX system calls. The second method is referred to as the *high-level* I/O operation and uses functions in C's standard I/O library. We shall discuss in this chapter, the important file handling functions that are available in the C library. They are listed in Table 8.1.

Table 8.1 High Level I/O Functions

<i>Function name</i>	<i>Operation</i>
fopen()	* Creates a new file for use. * Opens an existing file for use.
fclose()	* Closes a file which has been opened for use.
getc()	* Reads a character from a file.
putc()	* Writes a character to a file.
fprintf()	* Writes a set of data values to a file.
fscanf()	* Reads a set of data values from a file.
getw()	* Reads an integer from a file.
putw()	* Writes an integer to a file.

(Contd.)

8.2 Computer Programming

fseek()	* Sets the position to a desired point in the file.
ftell()	* Gives the current position in the file (in terms of bytes from the start).
rewind()	* Sets the position to the beginning of the file.

There are many other functions. Not all of them are supported by all compilers. You should check your C library before using a particular I/O function.

8.2 TYPES OF FILES

As already explained, files are used for the storage and retrieval of data by a C program. Depending upon the format in which data is stored, files are primarily categorized into two types:

- **Text file:** As the name suggests, a text file stores textual information like alphabets, numbers, special symbols, etc. In actuality, the ASCII code of textual characters is stored in the text files. But, since data is stored in a storage device in the binary format, the text file contents are first converted in the binary form before actually being stored in the storage device. In other words, we can say that the text files store the ASCII encrypted information. A text file can store different character sets such as:
 - Upper case English alphabets (A to Z)
 - Lowercase English alphabets (a to z)
 - Numeric characters (like 1, 3, 5, etc.)
 - Punctuation characters (like ; , ' " , ? , etc.)
 - Special characters (like \$, % , etc.)

Some of the examples of text files include C source code files and files with .txt extension. C language supports various operations for manipulating data stored in a text file. Some of these operations include creating a new file, opening an existing file, reading a file, writing into the file, etc. These operations are performed with the help of inbuilt functions of C, explained later in the chapter.

- **Binary file:** As the name suggests, a binary file stores the information in the binary form, i.e., in the same format as it is stored in the memory. Thus, the use of binary file eliminates the need of data conversion from text to binary format for storage purpose. However, one of the main drawbacks of binary file is that the data stored in a binary file is not in human understandable form. Any file which stores the data in the form of bytes, i.e., 8-bit representation is known as binary file. Every executable file generated by the C compiler is a binary file. Apart from .exe files, examples of binary files include video stream files, image files, etc. C language supports binary file operations such as **read**, **write** and **append** with the help of various inbuilt functions.

8.3 DEFINING AND OPENING A FILE

If we want to store data in a file in the secondary memory, we must specify certain things about the file, to the operating system. They include:

1. Filename.
2. Data structure.
3. Purpose.

Filename is a string of characters that make up a valid filename for the operating system. It may contain two parts, a *primary name* and an *optional period* with the extension. Examples:

Input.data
store

PROG.C
Student.c
Text.out

Data structure of a file is defined as **FILE** in the library of standard I/O function definitions. Therefore, all files should be declared as type **FILE** before they are used. **FILE** is a defined data type.

When we open a file, we must specify what we want to do with the file. For example, we may write data to the file or read the already existing data.

Following is the general format for declaring and opening a file:

```
FILE *fp;
fp = fopen("filename", "mode");
```

The first statement declares the variable **fp** as a “pointer to the data type **FILE**”. As stated earlier, **FILE** is a structure that is defined in the I/O library. The second statement opens the file named *filename* and assigns an identifier to the **FILE** type pointer **fp**. This pointer, which contains all the information about the file is subsequently used as a communication link between the system and the program.

The second statement also specifies the purpose of opening this file. The mode does this job. Mode can be one of the following:

- r** open the file for reading only.
- w** open the file for writing only.
- a** open the file for appending (or adding) data to it.

Note that both the filename and mode are specified as strings. They should be enclosed in double quotation marks.

When trying to open a file, one of the following things may happen:

1. When the mode is ‘writing’, a file with the specified name is created if the file does not exist. The contents are deleted, if the file already exists.
2. When the purpose is ‘appending’, the file is opened with the current contents safe. A file with the specified name is created if the file does not exist.
3. If the purpose is ‘reading’, and if it exists, then the file is opened with the current contents safe otherwise an error occurs.

Consider the following statements:

```
FILE *p1, *p2;
p1 = fopen("data", "r");
p2 = fopen("results", "w");
```

The file **data** is opened for reading and **results** is opened for writing. In case, the **results** file already exists, its contents are deleted and the file is opened as a new file. If **data** file does not exist, an error will occur.

Many recent compilers include additional modes of operation. They include:

- r+** The existing file is opened to the beginning for both reading and writing.
- w+** Same as **w** except both for reading and writing.
- a+** Same as **a** except both for reading and writing.

We can open and use a number of files at a time. This number however depends on the system we use.

8.4 CLOSING A FILE

A file must be closed as soon as all operations on it have been completed. This ensures that all outstanding information associated with the file is flushed out from the buffers and all links to the file are broken. It also

8.4 Computer Programming

prevents any accidental misuse of the file. In case, there is a limit to the number of files that can be kept open simultaneously, closing of unwanted files might help open the required files. Another instance where we have to close a file is when we want to reopen the same file in a different mode. The I/O library supports a function to do this for us. It takes the following form:

```
fclose(file_pointer);
```

This would close the file associated with the **FILE** pointer **file_pointer**. Look at the following segment of a program.

```
.....  
.....  
FILE *p1, *p2;  
p1 = fopen("INPUT", "w");  
p2 = fopen("OUTPUT", "r");  
.....  
.....  
fclose(p1);  
fclose(p2);  
.....
```

This program opens two files and closes them after all operations on them are completed. Once a file is closed, its file pointer can be reused for another file.

As a matter of fact all files are closed automatically whenever a program terminates. However, closing a file as soon as you are done with it is a good programming habit.

8.5 INPUT/OUTPUT OPERATIONS ON FILES

Once a file is opened, reading out of or writing to it is accomplished using the standard I/O routines that are listed in Table 8.1.

8.5.1 The *getc* and *putc* Functions

The simplest file I/O functions are **getc** and **putc**. These are analogous to **getchar** and **putchar** functions and handle one character at a time. Assume that a file is opened with mode **w** and file pointer **fp1**. Then, the statement

```
putc(c, fp1);
```

writes the character contained in the character variable **c** to the file associated with **FILE** pointer **fp1**. Similarly, **getc** is used to read a character from a file that has been opened in read mode. For example, the statement

```
c = getc(fp2);
```

would read a character from the file whose file pointer is **fp2**.

The file pointer moves by one character position for every operation of **getc** or **putc**. The **getc** will return an end-of-file marker EOF, when end of the file has been reached. Therefore, the reading should be terminated when EOF is encountered.

EXAMPLE 8.1	Write a program to read data from the keyboard, write it to a file called INPUT, again read the same data from the INPUT file, and display it on the screen.
--------------------	--

A program and the related input and output data are shown in Fig. 8.1. We enter the input data via the keyboard and the program writes it, character by character, to the file **INPUT**. The end of the data is indicated by entering an **EOF** character, which is *control-Z* in the reference system. (This may be control-D in other systems.) The file **INPUT** is closed at this signal.

Program

```
#include <stdio.h>

main()
{
    FILE *f1;
    char c;
    printf("Data Input\n\n");
    /* Open the file INPUT */
    f1 = fopen("INPUT", "w");

    /* Get a character from keyboard */
    while((c=getchar()) != EOF)

        /* Write a character to INPUT */
        putc(c,f1);
    /* Close the file INPUT */
    fclose(f1);
    printf("\nData Output\n\n");
    /* Reopen the file INPUT */
    f1 = fopen("INPUT", "r");

    /* Read a character from INPUT*/
    while((c=getc(f1)) != EOF)

        /* Display a character on screen */
        printf("%c",c);

    /* Close the file INPUT */
    fclose(f1);
}
```

Output

```
Data Input
This is a program to test the file handling
features on this system^Z

Data Output
This is a program to test the file handling
features on this system
```

Fig. 8.1 Character oriented read/write operations on a file

The file **INPUT** is again reopened for reading. The program then reads its content character by character, and displays it on the screen. Reading is terminated when **getc** encounters the end-of-file mark EOF.

Testing for the end-of-file condition is important. Any attempt to read past the end of file might either cause the program to terminate with an error or result in an infinite loop situation.

8.5.2 The *getw* and *putw* Functions

The **getw** and **putw** are integer-oriented functions. They are similar to the **getc** and **putc** functions and are used to read and write integer values. These functions would be useful when we deal with only integer data. The general forms of **getw** and **putw** are:

```
putw(integer, fp);
getw(fp);
```

Example 8.2 illustrates the use of **putw** and **getw** functions.

EXAMPLE 8.2 A file named DATA contains a series of integer numbers. Code a program to read these numbers and then write all ‘odd’ numbers to a file to be called ODD and all ‘even’ numbers to a file to be called EVEN.

The program is shown in Fig. 8.2. It uses three files simultaneously and therefore, we need to define three-file pointers **f1**, **f2** and **f3**.

First, the file DATA containing integer values is created. The integer values are read from the terminal and are written to the file **DATA** with the help of the statement

```
putw(number, f1);
```

Notice that when we type -1 , the reading is terminated and the file is closed. The next step is to open all the three files, **DATA** for reading, **ODD** and **EVEN** for writing. The contents of **DATA** file are read, integer by integer, by the function **getw(f1)** and written to **ODD** or **EVEN** file after an appropriate test. Note that the statement

```
(number = getw(f1)) != EOF
```

reads a value, assigns the same to **number**, and then tests for the end-of-file mark.

Finally, the program displays the contents of ODD and EVEN files. It is important to note that the files **ODD** and **EVEN** opened for writing are closed before they are reopened for reading.

Program

```
#include <stdio.h>
main()
{
    FILE *f1, *f2, *f3;
    int number, i;

    printf("Contents of DATA file\n\n");
    f1 = fopen("DATA", "w"); /* Create DATA file */
    for(i = 1; i <= 30; i++)
    {
        scanf("%d", &number);
        if(number == -1) break;
        putw(number, f1);
    }
    fclose(f1);

    f1 = fopen("DATA", "r");
    f2 = fopen("ODD", "w");
```

(Contd.)

```

f3 = fopen("EVEN", "w");

/* Read from DATA file */
while((number = getw(f1)) != EOF)
{
    if(number %2 == 0)
        putw(number, f3); /* Write to EVEN file */
    else
        putw(number, f2); /* Write to ODD file */
}
fclose(f1);
fclose(f2);
fclose(f3);

f2 = fopen("ODD", "r");
f3 = fopen("EVEN", "r");
printf("\n\nContents of ODD file\n\n");
while((number = getw(f2)) != EOF)
    printf("%4d", number);
printf("\n\nContents of EVEN file\n\n");
while((number = getw(f3)) != EOF)
    printf("%4d", number);

fclose(f2);
fclose(f3);

}

```

Output

```

Contents of DATA file
111 222 333 444 555 666 777 888 999 000 121 232 343 454 565 -1

Contents of ODD file
111 333 555 777 999 121 343 565

Contents of EVEN file
222 444 666 888 0 232 454

```

Fig. 8.2 Operations on integer data**8.5.3 The *fprintf* and *fscanf* Functions**

So far, we have seen functions, that can handle only one character or integer at a time. Most compilers support two other functions, namely **fprintf** and **fscanf**, that can handle a group of mixed data simultaneously.

The functions **fprintf** and **fscanf** perform I/O operations that are identical to the familiar **printf** and **scanf** functions, except of course that they work on files. The first argument of these functions is a file pointer which specifies the file to be used. The general form of **fprintf** is

```
fprintf(fp, "control string", list);
```

where *fp* is a file pointer associated with a file that has been opened for writing. The *control string* contains output specifications for the items in the list. The *list* may include variables, constants and strings. Example:

```
fprintf(f1, "%s %d %f", name, age, 7.5);
```

8.8 Computer Programming

Here, **name** is an array variable of type `char` and **age** is an `int` variable.
The general format of **fscanf** is

```
fprintf(fp, "control string", list);
```

This statement would cause the reading of the items in the list from the file specified by `fp`, according to the specifications contained in the *control string*. Example:

```
fscanf(f2, "%s %d", item, &quantity);
```

Like **scanf**, **fscanf** also returns the number of items that are successfully read. When the end of file is reached, it returns the value **EOF**.

EXAMPLE 8.3	Write a program to open a file named INVENTORY and store in it the following data: <table><thead><tr><th>Item name</th><th>Number</th><th>Price</th><th>Quantity</th></tr></thead><tbody><tr><td>AAA-1</td><td>111</td><td>17.50</td><td>115</td></tr><tr><td>BBB-2</td><td>125</td><td>36.00</td><td>75</td></tr><tr><td>C-3</td><td>247</td><td>31.75</td><td>104</td></tr></tbody></table> Extend the program to read this data from the file INVENTORY and display the inventory table with the value of each item.	Item name	Number	Price	Quantity	AAA-1	111	17.50	115	BBB-2	125	36.00	75	C-3	247	31.75	104
Item name	Number	Price	Quantity														
AAA-1	111	17.50	115														
BBB-2	125	36.00	75														
C-3	247	31.75	104														

The program is given in Fig. 8.3. The filename INVENTORY is supplied through the keyboard. Data is read using the function **fscanf** from the file **stdin**, which refers to the terminal and it is then written to the file that is being pointed to by the file pointer **fp**. Remember that the file pointer **fp** points to the file INVENTORY.

After closing the file INVENTORY, it is again reopened for reading. The data from the file, along with the item values are written to the file **stdout**, which refers to the screen. While reading from a file, care should be taken to use the same format specifications with which the contents have been written to the file....é

Program

```
#include <stdio.h>

main()
{
    FILE *fp;
    int    number, quantity, i;
    float  price, value;
    char   item[10], filename[10];

    printf("Input file name\n");
    scanf("%s", filename);
    fp = fopen(filename, "w");
    printf("Input inventory data\n\n");
    printf("Item name Number Price Quantity\n");
    for(i = 1; i <= 3; i++)
    {
        fscanf(stdin, "%s %d %f %d",
               item, &number, &price, &quantity);
        fprintf(fp, "%s %d %.2f %d",
               item, number, price, quantity);
    }
}
```

(Contd.)

```

fclose(fp);
fprintf(stdout, "\n\n");

fp = fopen(filename, "r");
printf("Item name  Number  Price  Quantity  Value\n");
for(i = 1; i <= 3; i++)
{
    fscanf(fp, "%s %d %f %d", item, &number, &price, &quantity);
    value = price * quantity;
    fprintf(stdout, "%-8s %7d %8.2f %8d %11.2f\n",
            item, number, price, quantity, value);
}
fclose(fp);
}

```

Output

Input file name

INVENTORY

Input inventory data

Item name	Number	Price	Quantity
AAA-1	111	17.50	115
BBB-2	125	36.00	75
C-3	247	31.75	104

Item name	Number	Price	Quantity	Value
AAA-1	111	17.50	115	2012.50
BBB-2	125	36.00	75	2700.00
C-3	247	31.75	104	3302.00

Fig. 8.3 Operations on mixed data types

8.6 ERROR HANDLING DURING I/O OPERATIONS

It is possible that an error may occur during I/O operations on a file. Typical error situations include:

1. Trying to read beyond the end-of-file mark.
2. Device overflow.
3. Trying to use a file that has not been opened.
4. Trying to perform an operation on a file, when the file is opened for another type of operation.
5. Opening a file with an invalid filename.
6. Attempting to write to a write-protected file.

If we fail to check such read and write errors, a program may behave abnormally when an error occurs. An unchecked error may result in a premature termination of the program or incorrect output. Fortunately, we have two status-inquiry library functions; **feof** and **ferror** that can help us detect I/O errors in the files.

The **feof** function can be used to test for an end of file condition. It takes a **FILE** pointer as its only argument and returns a nonzero integer value if all of the data from the specified file has been read, and returns zero otherwise. If **fp** is a pointer to file that has just been opened for reading, then the statement

```

if(feof(fp))
    printf("End of data.\n");

```

would display the message “End of data.” on reaching the end of file condition.

8.10 Computer Programming

The **ferror** function reports the status of the file indicated. It also takes a **FILE** pointer as its argument and returns a nonzero integer if an error has been detected up to that point, during processing. It returns zero otherwise. The statement

```
if(ferror(fp) != 0)
    printf("An error has occurred.\n");
```

would print the error message, if the reading is not successful.

We know that whenever a file is opened using **fopen** function, a file pointer is returned. If the file cannot be opened for some reason, then the function returns a NULL pointer. This facility can be used to test whether a file has been opened or not. Example:

```
if(fp == NULL)
    printf("File could not be opened.\n");
```

EXAMPLE 8.4 Write a program to illustrate error handling in file operations.

The program shown in Fig. 8.4 illustrates the use of the **NULL** pointer test and **feof** function. When we input filename as TETS, the function call

```
fopen("TETS", "r");
```

returns a **NULL** pointer because the file TETS does not exist and therefore the message “Cannot open the file” is printed out.

Similarly, the call **feof(fp2)** returns a non-zero integer when the entire data has been read, and hence the program prints the message “Ran out of data” and terminates further reading.

Program

```
#include <stdio.h>

main()
{
    char *filename;
    FILE *fp1, *fp2;
    int i, number;

    fp1 = fopen("TEST", "w");
    for(i = 10; i <= 100; i += 10)
        putw(i, fp1);

    fclose(fp1);

    printf("\nInput filename\n");

    open_file:
    scanf("%s", filename);

    if((fp2 = fopen(filename, "r")) == NULL)
    {
        printf("Cannot open the file.\n");
        printf("Type filename again.\n\n");
    }
}
```

(Contd.)

```

        goto open_file;
    }
    else

    for(i = 1; i <= 20; i++)
    {   number = getw(fp2);
        if(feof(fp2))
        {
            printf("\nRan out of data.\n");
            break;
        }
        else
            printf("%d\n", number);
    }

    fclose(fp2);
}

```

Output

```

Input filename
TETS
Cannot open the file.
Type filename again.

TEST
10
20
30
40
50
60
70
80
90
100

Ran out of data.

```

Fig. 8.4 Illustration of error handling in file operations**8.7 RANDOM ACCESS TO FILES**

So far we have discussed file functions that are useful for reading and writing data sequentially. There are occasions, however, when we are interested in accessing only a particular part of a file and not in reading the other parts. This can be achieved with the help of the functions **fseek**, **ftell**, and **rewind** available in the I/O library.

ftell takes a file pointer and return a number of type **long**, that corresponds to the current position. This function is useful in saving the current position of a file, which can be used later in the program. It takes the following form:

```
n = ftell(fp);
```

8.12 Computer Programming

n would give the relative offset (in bytes) of the current position. This means that **n** bytes have already been read (or written).

rewind takes a file pointer and resets the position to the start of the file. For example, the statement

```
rewind(fp);  
n = ftell(fp);
```

would assign **0** to **n** because the file position has been set to the start of the file by **rewind**. Remember, the first byte in the file is numbered as 0, second as 1, and so on. This function helps us in reading a file more than once, without having to close and open the file. Remember that whenever a file is opened for reading or writing, a **rewind** is done implicitly.

fseek function is used to move the file position to a desired location within the file. It takes the following form:

```
fseek(file_ptr, offset, position);
```

file_ptr is a pointer to the file concerned, *offset* is a number or variable of type long, and *position* is an integer number. The *offset* specifies the number of positions (bytes) to be moved from the location specified by *position*. The *position* can take one of the following three values:

Value	Meaning
0	Beginning of file
1	Current position
2	End of file

The offset may be positive, meaning move forwards, or negative, meaning move backwards.

Examples in Table 8.2 illustrate the operations of the **fseek** function:

Table 8.2 Operations of fseek Function

Statement	Meaning
fseek(fp,0L,0);	Go to the beginning. (Similar to rewind)
fseek(fp,0L,1);	Stay at the current position. (Rarely used)
fseek(fp,0L,2);	Go to the end of the file, past the last character of the file.
fseek(fp,m,0);	Move to (m+1)th byte in the file.
fseek(fp,m,1);	Go forward by m bytes.
fseek(fp,-m,1);	Go backward by m bytes from the current position.
fseek(fp,-m,2);	Go backward by m bytes from the end. (Positions the file to the mth character from the end.)

When the operation is successful, **fseek** returns a zero. If we attempt to move the file pointer beyond the file boundaries, an error occurs and **fseek** returns -1 (minus one). It is good practice to check whether an error has occurred or not, before proceeding further.

EXAMPLE 8.5 Write a program that uses the functions ftell and fseek.

Position —> 0 1 2 ... 25
Character stored —> A B C ... Z

We are reading the file twice. First, we are reading the content of every fifth position and printing its value along with its position on the screen. The second time, we are reading the contents of the file from the end and printing the same on the screen.

During the first reading, the file pointer crosses the end-of-file mark when the parameter **n** of **fseek(fp,n,0)** becomes 30. Therefore, after printing the content of position 30, the loop is terminated.

For reading the file from the end, we use the statement

```
fseek(fp,-1L,2);
```

to position the file pointer to the last character. Since every read causes the position to move forward by one position, we have to move it back by two positions to read the next character. This is achieved by the function

```
fseek(fp, -2L, 1);
```

in the while statement. This statement also tests whether the file pointer has crossed the file boundary or not. The loop is terminated as soon as it crosses it.

Program

```
#include <stdio.h>
main()
{
    FILE *fp;
    long n;
    char c;
    fp = fopen("RANDOM", "w");
    while((c = getchar()) != EOF)
        putc(c,fp);

    printf("No. of characters entered = %ld\n", ftell(fp));
    fclose(fp);
    fp = fopen("RANDOM","r");
    n = 0L;

    while(feof(fp) == 0)
    {
        fseek(fp, n, 0); /* Position to (n+1)th character */
        printf("Position of %c is %ld\n", getc(fp),ftell(fp));
        n = n+5L;
    }
    putchar('\n');

    fseek(fp,-1L,2); /* Position to the last character */
    do
    {
        putchar(getc(fp));
    }
    while(!fseek(fp,-2L,1));
    fclose(fp);
}
```

Output

```
ABCDEFGHIJKLMNOPQRSTUVWXYZ
No. of characters entered = 26
```

(Contd.)

8.14 Computer Programming

```
Position of A is 0
Position of F is 5
Position of K is 10
Position of P is 15
Position of U is 20
Position of Z is 25
Position of   is 30

ZYXWVUTSRQPONMLKJIHGFEDCBA
```

Fig. 8.5 Illustration of *fseek* and *ftell* functions

EXAMPLE 8.6 Write a program to append additional items to the file INVENTORY created in Example 8.3 and print the total contents of the file.

The program is shown in Fig. 8.6. It uses a structure definition to describe each item and a function **append()** to add an item to the file.

On execution, the program requests for the filename to which data is to be appended. After appending the items, the position of the last character in the file is assigned to **n** and then the file is closed.

The file is reopened for reading and its contents are displayed. Note that reading and displaying are done under the control of a **while** loop. The loop tests the current file position against **n** and is terminated when they become equal.

Program

```
#include <stdio.h>

struct invent_record
{
    char   name[10];
    int    number;
    float  price;
    int    quantity;
};

main()
{
    struct invent_record item;
    char filename[10];
    int response;
    FILE *fp;
    long n;
    void append (struct invent_record *x, file *y);
    printf("Type filename:");
    scanf("%s", filename);

    fp = fopen(filename, "a+");
    do
    {
        append(&item, fp);
        printf("\nItem %s appended.\n", item.name);
        printf("\nDo you want to add another item\
            (1 for YES /0 for NO)?");
```

(Contd.)

```

        scanf("%d", &response);
    } while (response == 1);

    n = ftell(fp);    /* Position of last character */
    fclose(fp);

    fp = fopen(filename, "r");

    while(ftell(fp) < n)
    {
        fscanf(fp, "%s %d %f %d",
            item.name, &item.number, &item.price, &item.quantity);
        fprintf(stdout, "%-8s %7d %8.2f %8d\n",
            item.name, item.number, item.price, item.quantity);
    }
    fclose(fp);
}

void append(struct invent_record *product, File *ptr)
{
    printf("Item name:");
    scanf("%s", product->name);
    printf("Item number:");
    scanf("%d", &product->number);
    printf("Item price:");
    scanf("%f", &product->price);
    printf("Quantity:");
    scanf("%d", &product->quantity);
    fprintf(ptr, "%s %d %.2f %d",
        product->name,
        product->number,
        product->price,
        product->quantity);
}

```

Output

```

Type filename:INVENTORY
Item name:XXX
Item number:444
Item price:40.50
Quantity:34
Item XXX appended.
Do you want to add another item(1 for YES /0 for NO)?1
Item name:YYY
Item number:555
Item price:50.50
Quantity:45
Item YYY appended.
Do you want to add another item(1 for YES /0 for NO)?0
AAA-1      111    17.50    115
BBB-2      125    36.00     75
C-3        247    31.75    104
XXX         444    40.50     34
YYY         555    50.50     45

```

Fig. 8.6 Adding items to an existing file

Just Remember

- Do not try to use a file before opening it.
 - Remember, when an existing file is open using 'w' mode, the contents of file are deleted.
 - When a file is used for both reading and writing, we must open it in 'w+' mode.
 - EOF is integer type with a value -1. Therefore, we must use an integer variable to test EOF.
 - It is an error to omit the file pointer when using a file function.
 - It is an error to open a file for reading when it does not exist.
 - It is an error to try to read from a file that is in write mode and vice versa.
 - It is an error to attempt to place the file marker before the first byte of a file.
 - It is an error to access a file with its name rather than its file pointer.
 - It is a good practice to close all files before terminating a program.
 - Use getw and putw for reading and writing an integer to a file.
 - You must choose an appropriate file access mode depending upon the type of file operation that you want to perform.
 - It is always advisable to implement an error-handling mechanism through the use of ferror function.
 - Use the fseek function to move to any desired location in a file.
-

Multiple Choice Questions

1. Which of the following tasks are not performed by the fopen function?
 - (a) Creating a new file which does not already exist
 - (b) Opening an existing file
 - (c) Deleting the existing file and creating a new one with the same name
 - (d) Opening an existing file in append mode
2. Which of the following is true for getc function?
 - (a) Read a string from the file
 - (b) Read a character from the file
 - (c) Read a character from the console
 - (d) Read a string from the console
3. Which of the following tasks are performed by the rewind function?
 - (a) Set the file pointer to the end of the file
 - (b) Set the file pointer to the beginning of the file
 - (c) Set the file pointer to any desired position in the file
 - (d) Erase all the file contents and place the file pointer at the beginning
4. Which of the following are not i/o functions in C?
 - (a) fscanf
 - (b) fseek
 - (c) ftel
 - (d) forward
5. What is the functionality of a+ file access mode?
 - (a) Open the file for appending data to it
 - (b) Open the file in read-write mode for appending data to it
 - (c) Append the contents of one file into another
 - (d) None of the above
6. Which of the following is true for putc?
 - (a) Put one character at a time into the file
 - (b) Put one string at a time into the file
 - (c) Put one character at a time into the console
 - (d) Put one string at a time into the console
7. Which of the following functions is used to read an integer value from a file?
 - (a) getw
 - (b) getc
 - (c) gets
 - (d) geti

8. Which of the following file-handling functions is analogous to the standard i/o function printf?
 - (a) fprintf (b) fprintf
 - (c) fprintfs (d) fprintfline
 9. What will the function call fseek(fp,m,0) do?
 - (a) Move to the mth byte in the file
 - (b) Move to the (m-1)th byte in the file
 - (c) Move to the (m+1)th byte in the file
 - (d) Move to a location which is m positions ahead of the current file pointer position
 10. Command line functions are:
 - (a) Passed at run time
 - (b) Passed at compile time
 - (c) Passed to the main function during preprocessing of the program
 - (d) Passed during dynamic memory allocation
 11. End of file is represented by which of the following?
 - (a) eof (b) EOF
 - (c) '/0' (d) Any garbage value
 12. What is the type and value of EOF?
 - (a) int, 0 (b) int, 1
 - (c) int, -1 (d) char, 1
 13. Which of the following is a commonly used function for error-handling?
 - (a) ferr (b) ferrror
 - (c) feof (d) None of the above
 14. Which of the following is not a file access mode?
 - (a) r+ (b) w+
 - (c) a- (d) a+
 15. In C, files can be manipulated in which of the following modes?
 - (a) text (b) int
 - (c) binary (d) All of the above
-

Review Questions

- 8.1 State whether the following statements are *true* or *false*.
 - (a) A file must be opened before it can be used.
 - (b) All files must be explicitly closed.
 - (c) Files are always referred to by name in C programs.
 - (d) Using **fseek** to position a file beyond the end of the file is an error.
 - (e) Function **fseek** may be used to seek from the beginning of the file only.
- 8.2 Fill in the blanks in the following statements.
 - (a) The mode _____ is used for opening a file for updating.
 - (b) The function _____ may be used to position a file at the beginning.
 - (c) The function _____ gives the current position in the file.
 - (d) The function _____ is used to write data to randomly accessed file.
- 8.3 Describe the use and limitations of the functions **getc** and **putc**.
- 8.4 What is the significance of EOF?
- 8.5 When a program is terminated, all the files used by it are automatically closed. Why is it then necessary to close a file during execution of the program?
- 8.6 Distinguish between the following functions:
 - (a) **getc** and **getchar**
 - (b) **printf** and **fprintf**
 - (c) **feof** and **ferror**
- 8.7 How does an append mode differ from a write mode?
- 8.8 What are the common uses of **rewind** and **ftell** functions?
- 8.9 Explain the general format of **fseek** function?
- 8.10 What is the difference between the statements **rewind(fp);** and **fseek(fp,0L,0);**?
- 8.11 Find error, if any, in the following statements:


```
FILE fptr;
fptr = fopen ("data", "a+");
```
- 8.12 What does the following statement mean?


```
FILE(*p) (void)
```
- 8.13 What does the following statement do?


```
While ( (c = getchar( )) != EOF )
  putc(c, fl);
```

8.18 Computer Programming

8.14 What does the following statement do?

```
While ( (m = getw(f1)) != EOF)
    printf("%5d", m);
```

8.15 What does the following segment do?

```
. . . . .
for (i = 1; i <= 5; i++)
{
    fscanf(stdin, "%s", name);
    fprintf(fp, "%s", name);
}
. . . . .
```

8.16 What is the purpose of the following functions?

- (a) feof () (b) ferror ()

8.17 Give examples of using **feof** and **ferror** in a program.

8.18 Can we read from a file and write to the same file without resetting the file pointer? If not, why?

8.19 When do we use the following functions ?

- (a) free () (b) rewind ()

8.20 Describe an algorithm that will append the contents of one file to the end of another file.

Programming Exercises

8.1 Write a program to copy the contents of one file into another.

8.2 Two files DATA1 and DATA2 contain sorted lists of integers. Write a program to produce a third file DATA which holds a single sorted, merged list of these two lists. Use command line arguments to specify the file names.

8.3 Write a program that compares two files and returns 0 if they are equal and 1 if they are not.

8.4 Write a program that appends one file at the end of another.

8.5 Write a program that reads a file containing integers and appends at its end the sum of all the integers.

8.6 Write a program that prompts the user for two files, one containing a line of text known as source file and other, an empty file known as target file and then copies the contents of source file into target file. Modify the program so that a specified character is deleted from the source file as it is copied to the target file.

8.7 Write a program that requests for a file name and an integer, known as offset

value. The program then reads the file starting from the location specified by the offset value and prints the contents on the screen.

Note: If the offset value is a positive integer, then printing skips that many lines. If it is a negative number, it prints that many lines from the end of the file. An appropriate error message should be printed, if anything goes wrong.

8.8 Write a program to create a sequential file that could store details about five products. Details include product code, cost and number of items available and are provided through keyboard.

8.9 Write a program to read the file created in Exercise 14.8 and compute and print the total value of all the five products.

8.10 Rewrite the program developed in Exercise 14.8 to store the details in a random access file and print the details of alternate products from the file. Modify the program so that it can output the details of a product when its code is specified interactively.

Key Terms

- **Filename:** It is a string of characters that make up a valid filename for the operating system.
- **ftell:** It is a function, which takes a file pointer and returns a number of type long that corresponds to the current position.
- **rewind:** It is a function, which takes a file pointer and resets the position to the start of the file.
- **fseek:** It is a function used to move the file position to a desired location within the file.

Appendix A

EXAMPLE A.1 Write a program for demonstrating the use of symbolic constants.

Program

```
/*Program for demonstrating use of Symbolic Constants*/
#include <stdio.h>
#include <conio.h>
#define CP 50 /*Defining Symbolic Constant for Cost Price*/

void main( )
{
    int SP, profit;
    clrscr();

    printf("Enter the SELLING PRICE ");
    scanf("%d", &SP);

    profit=SP-CP; /*Using Symbolic Constant CP in an expression*/
    printf("\nThe profit earned is %d", profit);

    getch();
}
```

Output

```
Enter the SELLING PRICE 65

The profit earned is 15
```

EXAMPLE A.2 Write a program that reads a date in the dd\mm\yyyy format and determines whether the entered date is correct or not.

Program

```
/*Program for demonstrating the use of scanf function*/
#include <stdio.h>
#include <conio.h>
```

(Contd.)

A.2 Computer Programming

```
void main()
{
    int dd,mm,yyyy;
    clrscr();

    printf("Enter the date in dd mm yyyy format ");
    scanf("%d %d %d",&dd,&mm,&yyyy); /*Reading the date values*/

    /*Checking whether day, month, and year is correct */
    if(dd<1 || dd>31 || mm<1 || mm>12 || yyyy<0 || (mm==2 && dd>29))
        printf("NO");
    else
        printf("YES");

    getch();
}
```

Output

```
Enter the date in dd mm yyyy format 22      09      2001
YES
```

EXAMPLE A.3 Write a program to determine whether an input number is even or odd.

Program

```
/*Program for demonstrating use of Modulo Division Operator %*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int num;
    clrscr();

    printf("\nEnter a number: ");
    scanf("%d",&num);/*Reading an Integer*/

    if(num%2==0)/*Using % operator to compute the remainder value*/
        printf("\n%d is an even number",num);
    else
        printf("\n%d is an odd number",num);

    getch();
}
```

Output

```
Enter a number: 55

55 is an odd number
```

EXAMPLE A.4 Write a program to convert degrees value into radians.**Program**

```

/*Program for demonstrating real arithmetic*/
#include <stdio.h>
#include <conio.h>

void main( )
{
    float deg, radian;
    clrscr();

    printf("Enter the degrees value ");
    scanf("%f", &deg);

    radian=(deg*3.14)/180.00; /*Using a formula for converting degrees to radians*/
    printf("\nThe equivalent value in radians is %.2f", radian);

    getch();
}

```

Output

Enter the degrees value 120

The equivalent value in radians is 2.09

EXAMPLE A.5 Write a program for calculating speed.**Program**

```

/*Program for demonstrating mixed-mode arithmetic*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int d;
    float t;
    clrscr();
    /*Reading the values of distance and time*/
    printf("\nEnter the distance travelled in Kms: ");
    scanf("%d", &d);
    printf("\nEnter the travel time in hours: ");
    scanf("%f", &t);

    printf("\nSpeed = %.2f Km/h", d/t); /*Mixed-mode arithmetic expression*/
    getch();
}

```

(Contd.)

A.4 Computer Programming

Output

Enter the distance travelled in Kms: 380

Enter the travel time in hours: 5.5

Speed = 69.09 Km/h

EXAMPLE A.6 Write a program for evaluating the logical expression $(10/2-4)\&\&(7\%3)\|(0/10)$.

Program

```
/*Program for demonstrating the use of logical operators*/
#include <stdio.h>
#include <conio.h>

void main()
{
    clrscr();

    if((10/2-4)&&(7%3)||(0/10))/*Evaluating a logical expression*/
        printf("True");
    else
        printf("False");

    getch();
}
```

Output

True

EXAMPLE A.7 Write a program to demonstrate the use of increment operator.

Program

```
/*Program for demonstrating the use of increment operator*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int a=10;
    clrscr();

    /*Using Increment Operator*/
    printf("a = %d",a);
    printf("\n++a = %d",++a);
    printf("\na = %d",a);
}
```

(Contd.)

```
printf("\na++ = %d",a++);
printf("\na = %d",a);

getch();
}
```

Output

```
a = 10
++a = 11
a = 11
a++ = 11
a = 12
```

EXAMPLE A.8 Write a program to perform bitwise AND and OR operations.

Program

```
/*Program for demonstrating the use of bitwise operators*/
#include <stdio.h>
#include <conio.h>

void main()
{
    char a='A',b='B';
    clrscr();

    printf("a & b = %c",a&b);/*Using bitwise & operator*/
    printf("\na | b = %c",a|b);/*Using bitwise | operator*/

    getch();
}
```

Output

```
a & b = @
a | b = C
```

EXAMPLE A.9 Write a program to demonstrate the use of sizeof operator.

Program

```
/*Program for demonstrating the use of sizeof operator*/
#include <stdio.h>
#include <conio.h>

void main()
{
    char a;
    int b;
```

(Contd.)

A.6 Computer Programming

```
long c;
float d;
clrscr();

/*Using the sizeof operator to compute the size of different datatypes*/
printf("Size of char a = %u",sizeof(a));
printf("\nSize of int b = %u",sizeof(b));
printf("\nSize of long c = %u",sizeof(c));
printf("\nSize of float d = %u",sizeof(d));
getch();
}
```

Output

```
Size of char a = 1
Size of int b = 2
Size of long c = 4
Size of float d = 4
```

EXAMPLE A.10 Write a program to solve the equation $x = a - b/3 + c*2 - 1$.

Program

```
/*Program for demonstrating operator precedence in expression evaluation*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int a=9,b=12,c=3;
    int x;
    clrscr();

    x=a-b/3+c*2-1; /*Expression evaluation*/
    printf("Value of x = %d",x); /*Printing the resultant value x*/

    getch();
}
```

Output

```
Value of x = 10
```

EXAMPLE A.11 Write a program to evaluate the expression $A/B*C+D/A$.

Program

```
/*Program for demonstrating operator precedence in expression evaluation*/
#include <stdio.h>
#include <conio.h>
```

(Contd.)

```

void main()
{
    int A,B,C,D;
    int RESULT;
    clrscr();
    printf("Enter the value of A, B, C and D: ");
    scanf("%d %d %d %d",&A, &B, &C, &D);/*Reading operand values*/

    RESULT= A - B * C + D * A; /*Expression evaluation*/
    printf("RESULT = %d",RESULT);/*Printing the resultant value*/

    getch();
}

```

Output

```

Enter the value of A, B, C and D: 22
5
65
9
RESULT = -105

```

EXAMPLE A.12 Write a program to compute logarithmic values.

Program

```

/*Program for demonstrating the use of built-in functions of C*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    int x;
    float l1,l2;
    clrscr();
    printf("Enter the value of x: ");
    scanf("%d",&x);/*Reading x*/

    l1=log(x);/*Computing natural log*/
    l2=log10(x); /*Computing log to the base 10*/
    printf("log(x) = %.2f\nlog10(x) = %.2f",l1,l2);/*Printing the resultant values*/

    getch();
}

```

Output

```

Enter the value of x: 10
log(x) = 2.30
log10(x) = 1.00

```

A.8 Computer Programming

EXAMPLE A.13 Write a program to compute x^y .

Program

```
/*Program for demonstrating the use of built-in function pow(x,y)*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    int x,y;
    long z;
    clrscr();

    printf("Enter the value of x: ");
    scanf("%d",&x);/*Reading the value of x*/
    printf("Enter the value of y: ");
    scanf("%d",&y);/*Reading the value of y*/

    z=pow(x,y);/*Calling the built-in function pow()*/

    printf("%d to the power of %d is equal to %ld", x, y, z);

    getch();
}
```

Output

```
Enter the value of x: 2
Enter the value of y: 16
2 to the power of 16 is equal to 65536
```

EXAMPLE A.14 Write a program for calculating sum of all the numbers between 3 and 20 excluding the multiples of 3.

Program

```
/*Program to demonstrate the use IF Statement*/
#include<stdio.h>
#include<conio.h>

void main()
{
    int i,sum=0;
    clrscr();

    for (i=3;i<20;i++)/*Specifying the looping condition*/
    {
        if(i%3==0)/*Identifying multiples of 3*/
            continue;
    }
}
```

(Contd.)


```

    sum=sum+i;
}

printf("\nSum of numbers between 3 to 20 excluding multiples of 3 = %d", sum);

getch();
}

```

Output

Sum of numbers between 3 to 20 excluding multiples of 3 = 124

EXAMPLE A.15 Write a program to determine whether or not a given year is a leap year.

Program

```

/*Program to demonstrate the use IF....ELSE Statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int year;
    clrscr();

    printf("\nEnter the year value: ");
    scanf("%d",&year);/*Reading the year value*/

    if(year%4==0)/*Determining whether year is a multiple of 4*/
        printf("\n\n%d is a leap year",year);
    else
        printf("\n%d is not a leap year",year);

    getch();
}

```

Output

Enter the year value: 2005

2005 is not a leap year

EXAMPLE A.16 Write a program to determine whether a given value is positive or negative.

Program

```

/*Program for demonstrating the use of IF....ELSE Statement*/
#include <stdio.h>
#include <conio.h>

```

(Contd.)

A.10 Computer Programming

```
void main()
{
    int num;
    clrscr();

    printf("\nEnter a number: ");
    scanf("%d",&num);/*Reading a number*/

    if(num>0)/*Checking positive values*/
        printf("\n%d is a positive number", num);
    else
        printf("\n%d is a negative number", num);

    getch();
}
```

Output

Enter a number: 12

12 is a positive number

EXAMPLE A.17 Write a program to determine the frequency of occurrence of individual digits in a number.

Program

```
/*Program for demonstrating the use of Switch Statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    long int num1,num2;
    int temp,d1=0,d2=0,d3=0,d4=0,d5=0,d6=0,d7=0,d8=0,d9=0,d0=0;
    clrscr();

    printf("\nEnter the number:");
    scanf("%ld",&num1);

    num2=num1;
    while(num1!=0)
    {
        temp=num1%10;
        switch(temp) /*Using the switch-case decision making construct*/
        {
            case 0:
                d0++; /*Counting number of Zeros*/
                break;
            case 1:
                d1++; /*Counting number of Ones*/
                break;
```

(Contd.)

```

        case 2:
            d2++; /*Counting number of Twos*/
            break;
        case 3:
            d3++; /*Counting number of Threes*/
            break;
        case 4:
            d4++; /*Counting number of Fours*/
            break;
        case 5:
            d5++; /*Counting number of Fives*/
            break;
        case 6:
            d6++; /*Counting number of Sixes*/
            break;
        case 7:
            d7++; /*Counting number of Sevens*/
            break;
        case 8:
            d8++; /*Counting number of Eights*/
            break;
        case 9:
            d9++; /*Counting number of Nines*/
            break;
    }
    num1=num1/10;
}
/*Displaying the frequency of individual digits in a number*/
printf("\nThe no of 0s in %ld are %d",num2,d0);
printf("\nThe no of 1s in %ld are %d",num2,d1);
printf("\nThe no of 2s in %ld are %d",num2,d2);
printf("\nThe no of 3s in %ld are %d",num2,d3);
printf("\nThe no of 4s in %ld are %d",num2,d4);
printf("\nThe no of 5s in %ld are %d",num2,d5);
printf("\nThe no of 6s in %ld are %d",num2,d6);
printf("\nThe no of 7s in %ld are %d",num2,d7);
printf("\nThe no of 8s in %ld are %d",num2,d8);
printf("\nThe no of 9s in %ld are %d",num2,d9);

    getch();
}

```

Output

Enter the number:889653442

```

The no of 0s in 889653442 are 0
The no of 1s in 889653442 are 0
The no of 2s in 889653442 are 1
The no of 3s in 889653442 are 1
The no of 4s in 889653442 are 2
The no of 5s in 889653442 are 1
The no of 6s in 889653442 are 1
The no of 7s in 889653442 are 0
The no of 8s in 889653442 are 2
The no of 9s in 889653442 are 1

```

EXAMPLE A.18 Write a program to implement a simple arithmetic calculator.**Program**

```

/*Program for demonstrating the use of Switch statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int choice;
    float num1, num2;
    clrscr();
    printf("*****Simple Calc*****");/*Displaying CalC options*/
    printf("\n\nChoose a type of operation from the following: ");
    printf("\n\t1.  Addition");
    printf("\n\t2.  Subtraction");
    printf("\n\t3.  Multiplication");
    printf("\n\t4.  Division\n");
    scanf("%d", &choice);/*Reading user's choice*/
    printf("\n\nEnter the two operands: ");
    scanf("%f %f", &num1, & num2);/*Reading operands*/

    /*Using the Switch statement to choose the operation statement*/
    switch (choice)
    {
        case 1:
            printf("\n%.2f + %.2f = %.21f", num1, num2, num1+num2);
            break;

        case 2:
            printf("\n%.2f - %.2f = %.21f", num1, num2, num1-num2);
            break;

        case 3:
            printf("\n%.2f * %.2f = %.21f", num1, num2, num1*num2);
            break;

        case 4:
            printf("\n%.2f / %.2f = %.21f", num1, num2, num1/num2);
            break;

        default:
            printf("\nIncorrect Choice!");
    }

    getch();
}

```

(Contd.)

Output

*****Simple Calc*****

Choose a type of operation from the following:

1. Addition
2. Subtraction
3. Multiplication
4. Division

3

Enter the two operands: 66

6

66.00 * 6.00 = 396.00

EXAMPLE A.19 Write a program to calculate the sum of digits of an integer.

Program

```
/*Program for demonstrating the use of while statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    long num, temp;
    int sum=0;
    clrscr();

    printf("\nEnter an integer value: ");
    scanf("%ld",&num);/*Reading a long integer*/

    temp=num;
    /*Calculating sum of digits*/
    while(temp!=0)
    {
        sum = sum+temp%10;
        temp=temp/10;
    }

    printf("\n\nThe sum of digits of %ld is %d",num,sum);/*Displaying result*/
    getch();
}
```

Output

Enter an integer value: 56988

The sum of digits of 56988 is 36

A.14 Computer Programming

EXAMPLE A.20 Write a program to determine whether or not a given number is an Armstrong.

Program

```
/*Program for demonstrating the use of while statement*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    int num, temp, sum=0, i;
    clrscr();

    printf("\nEnter a number: ");
    scanf("%d", &num); /*Reading num*/
    temp=num;

    while(temp>0) /*Computing Armstrong value*/
    {
        i=temp%10;
        sum=sum+i*i*i;
        temp=temp/10;
    }

    if(sum==num) /*Checking whether num is Armstrong or not*/
        printf("\n%d is an Armstrong number", num);
    else
        printf("\n%d is not an Armstrong number", num);

    getch();
}
```

Output

Enter a number: 371

371 is an Armstrong number

EXAMPLE A.21 Write a program to determine the Greatest Common Divisor (GCD) of two numbers.

Program

```
/*Program for demonstrating the use of while statement*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

int GCD(int m, int n); /*Declaring the GCD procedure for computing GCD value*/
```

(Contd.)

```

void main()
{
    int num1,num2;
    clrscr();

    printf("Enter the two numbers whose GCD is to be found: ");
    scanf("%d %d",&num1,&num2);/*Reading the two input numbers*/

    printf("\nGCD of %d and %d is %d\n",num1,num2,GCD(num1,num2));/*Calling the GCD procedure*/
    getch();
}

/*Defining the GCD procedure for computing the GCD value for two integer values*/
int GCD(int a, int b)
{
    if(b>a)
        return GCD(b,a);
    if(b==0)
        return a;
    else
        return GCD(b,a%b);
}

```

Output

```

Enter the two numbers whose GCD is to be found: 18
24

GCD of 18 and 24 is 6

```

EXAMPLE A.22 Write a program to display the Pascal's triangle.**Program**

```

/*Program for demonstrating the use of while statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int b,row,x,y,z;
    clrscr();
    b=1;
    y=0;

    printf("Enter the number of rows for the Pascal's triangle:");
    scanf("%d",&row);

    printf("\n*****Pascal's Triangle*****\n");

```

(Contd.)

A.16 Computer Programming

```
while(y<row)
{
    for(x=40-3*y;x>0;--x)
        printf(" ");

    for(z=0;z<=y;++z)
    {
        if((z==0)|| (y==0))
            b=1;
        else
            b=(b*(y-z+1))/z;
        printf("%6d",b);
    }
    printf("\n");
    ++y;
}

getch();
}
```

Output

Enter the number of rows for the Pascal's triangle:5

*****Pascal's Triangle*****

```

              1
            1   1
          1   2   1
        1   3   3   1
      1   4   6   4   1
```

EXAMPLE A.23 Write a program to find the sum of the following series up to 50 terms:

$$-1^3 + 3^3 - 5^3 + 7^3 - 9^3 + 11^3 - \dots$$

Program

```
/*Program for demonstrating the use of while statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int b,row,x,y,z;
    clrscr();
    b=1;
    y=0;

    printf("Enter the number of rows for the Pascal's triangle:");
    scanf("%d",&row);
```

(Contd.)


```

printf("\n*****Pascal's Triangle*****\n");

while(y<row)
{
    for(x=40-3*y;x>0;--x)
        printf(" ");

    for(z=0;z<=y;++z)
    {
        if((z==0) || (y==0))
            b=1;
        else
            b=(b*(y-z+1))/z;
        printf("%6d",b);
    }
    printf("\n");
    ++y;
}

getch();
}

```

Output

Sum of series = 499850

EXAMPLE A.24 Write a program to calculate the sum of N terms of the following series:

$$1^2 + 2^2 + 3^2 + 4^2 + \dots n^2$$

Program

```

/*Program to demonstrate the use of for statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,n;
    long sum=0;
    clrscr();

    printf("Enter the value of n = ");
    scanf("%d",&n);/*Reading number of terms in the series, n*/

    for(i=1;i<=n;i++)/*Calculating the sum of the series*/
        sum=sum+i*i;

    printf("Sum of series = %ld",sum);

    getch();
}

```

(Contd.)

A.18 Computer Programming

Output

Enter the value of n = 5
Sum of series = 55

EXAMPLE A.25 Write a program to find the sum of the following series:

$$1 + x + x^2 + x^3 + \dots + x^n.$$

Program

```
/*Program for demonstrating the use of for statement*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    long sum;
    int n,x,i;
    clrscr();

    printf("Enter the values of x and n:");
    scanf("%d %d",&x,&n);/*Reading values of x and n*/

    if(n<=0 || x<=0)/*Identifying incorrect values*/
    {
        printf("The values must be positive integers. Please try again\n");
        getch();
    }

    else
    {
        sum=1;
        for(i=1;i<=n;i++)
        {
            sum=sum+pow(x,i);/*Calculating the sum of the series*/
        }
        printf("Sum of series=%ld\n",sum);
    }
    getch();
}
```

Output

Enter the values of x and n:2
6
Sum of series=127

EXAMPLE A.26 Write a program to find the sum of the following series:

$$1 + 2 + 2^2 + 2^3 + \dots + 2^n.$$

Program

```
/*Program for demonstrating the use of for statement*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    long sum;
    int n,i;
    clrscr();

    printf("Enter the value of n: ");
    scanf("%d",&n);/*Reading value of n*/

    sum=1;
    for(i=1;i<=n;i++)
    {
        sum=sum+pow(2,i);/*Calculating the sum of the series*/
    }
    printf("Sum of series = %ld\n",sum);

    getch();
}
```

Output

```
Enter the value of n: 5
Sum of series = 63
```

EXAMPLE A.27 Write a program to solve the following series:

$$1 + 1/2 + 1/3 + 1/4 + \dots + 1/n.$$

Program

```
/*Program for demonstrating the use of for statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int n;
    float i;
    double sum;
    clrscr();
```

(Contd.)

A.20 Computer Programming

```
printf("Enter the value of n: ");
scanf("%d",&n);/*Reading the value of n*/

sum = 1.0;
for(i=2.0;i<=n;i++)/*Calculating the sum of the series*/
    sum = sum + 1.0/i;
printf("\nThe sum of the series 1 + 1/2 + 1/3 +....+1/n = %.8lf",sum);

getch();
}
```

Output

Enter the value of n: 8

The sum of the series $1 + 1/2 + 1/3 + \dots + 1/n = 2.71785714$

EXAMPLE A.28 Write a program to determine whether a given number is prime or not.

Program

```
/*Program for demonstrating the use of for statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int num,i;
    clrscr();

    printf("\nEnter a number: ");
    scanf("%d",&num);/*Reading a number*/

    for(i=2;i<num;i++)
        if(num%i==0)/*Checking if num is divisible by another number*/
        {
            printf("\n%d is not a prime number",num);
            break;
        }
        else
            ;

    if(i==num)
        printf("\n%d is a prime number",num);

    getch();
}
```

Output

Enter a number: 79

79 is a prime number

EXAMPLE A.29 Write a program for printing the Fibonacci series.**Program**

```

/*Program for demonstrating the use of for statement*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int num1=0, num2=1,len,i,fab;
    clrscr();

    printf("\n\nEnter Length of the Fibonacci Series: ");
    scanf("%d",&len);/*Reading series length*/

    printf("\n<----FIBONACCI SERIES----->");
    printf("\n%d  %d",num1,num2);/*Printing initial values of the series*/

    /*Printing the Fibonacci series*/
    for(i = 1; i <= len-2; i++)
    {
        fab=num1 + num2;
        printf("  %d",fab);
        num1=num2;
        num2=fab;
    }

    getch();
}

```

Output

```

Enter Length of the Fibonacci Series: 6

<----FIBONACCI SERIES----->
0  1  1  2  3  5

```

EXAMPLE A.30 Write a program to calculate the sum of the following series:
 $1^4 + 3^4 + 5^4 + \dots$ up to 100 terms.**Program**

```

/*Program for demonstrating the use of for statement*/
#include<stdio.h>
#include<conio.h>
#include<math.h>

void main()
{
    int i;

```

(Contd.)

A.22 Computer Programming

```
long sum=0;
clrscr();
for(i=1;i<=100;i=i+2)
    sum=sum+pow(i,4);/*Calculating the sum of the series*/

printf("\nSum of the series up to first 100 terms is equal to %ld",sum);
getch();
}
```

Output

Sum of the series up to first 100 terms is equal to 999666690

EXAMPLE A.31 Write a program for displaying a pyramid of the following form:

```
      0
    1 0 1
  2 1 0 1 2
3 2 1 0 1 2 3
4 3 2 1 0 1 2 3 4
5 4 3 2 1 0 1 2 3 4 5
```

Program

```
/*Program for demonstrating nesting of for statements*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int num,i,y,x=40;
    clrscr();

    printf("\nEnter a number for \ngenerating the pyramid:\n");
    scanf("%d",&num);

    /*Displaying the pyramid*/
    for(y=0;y<=num;y++)
    {
        gotoxy(x,y+1);
        for(i=0-y;i<=y;i++)
            printf("%3d",abs(i));
        x=x-3;
    }

    getch();
}
```

(Contd.)

Output

```

                                0
          Enter a number for    1 0 1
          generating the pyramid: 2 1 0 1 2
6                                     3 2 1 0 1 2 3
                                     4 3 2 1 0 1 2 3 4
                                     5 4 3 2 1 0 1 2 3 4 5
                                     6 5 4 3 2 1 0 1 2 3 4 5 6

```

EXAMPLE A.32 Write a program to calculate the sum of odd numbers between 1 and 50.

Program

```

/*Program to demonstrate the use For Statement*/
#include<stdio.h>
#include<conio.h>

void main()
{
    int i,sum=0;
    clrscr();

    for (i=1;i<50;i++)/*Specifying the looping condition*/
    {
        if(i%2==0)/*Identifying even numbers*/
            continue;
        sum=sum+i;/*Calculating the sum of odd numbers*/
    }

    printf("\nSum of odd numbers between 1 to 50 is = %d", sum);

    getch();
}

```

Output

Sum of odd numbers between 1 to 50 is = 625

EXAMPLE A.33 Write a simple program to implement a one-dimensional array and print its index and corresponding values.

Program

```

/*Program for demonstrating implementation of a simple array*/
#include <stdio.h>
#include <conio.h>

```

(Contd.)

A.24 Computer Programming

```
void main( )
{
    int i;
    int arr[5];/*Declaring an array of five elements*/
    clrscr();

    printf("Enter the array values:\n");
    for(i=0;i<5;i++)
        scanf("%d", &arr[i]);/*Reading values to be stored in the array*/

    printf("\nArray arr[5] contains the following values:\n");
    for(i=0;i<5;i++)
        printf("arr[%d] = %d\n", i,arr[i]);/*Printing array values*/

    getch();
}
```

Output

```
Enter the array values:
10
20
30
40
50
```

```
Array arr[5] contains the following values:
arr[0] = 10
arr[1] = 20
arr[2] = 30
arr[3] = 40
arr[4] = 50
```

EXAMPLE A.34 Write a program to generate Fibonacci series using arrays.

Program

```
/*Program for demonstrating the use arrays for generating Fibonacci series*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int arr[50],len,i;
    clrscr();

    printf("\n\nEnter length of the Fibonacci series: ");
    scanf("%d",&len);/*Reading series length*/

    arr[0]=0;/*Initializing 1st element of Fibonacci series*/
    arr[1]=1;/*Initializing 2nd element of Fibonacci series*/
```

(Contd.)


```

/*Storing the Fibonacci series values in array arr[]*/
for(i=2;i<len;i++)
    arr[i]=arr[i-1]+arr[i-2];

/*Printing the Fibonacci series*/
printf("\n<----FIBONACCI SERIES----->\n");
for(i=0;i<len;i++)
    printf("%d ",arr[i]);

getch();
}

```

Output

Enter length of the Fibonacci series: 8

```

<----FIBONACCI SERIES----->
0 1 1 2 3 5 8 13

```

EXAMPLE A.35 Write a program to perform linear search on a one-dimensional array.**Program**

```

/*Program for demonstrating linear search using a simple array*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int arr[10],i,j,element;
    int flag=0;
    clrscr();

    printf("Enter the 10 elements of the array:\n");
    for(i=0;i<10;i++)
        scanf("%d",&arr[i]);/*Reading array values*/

    printf("\n\nEnter the element that you want to search: ");
    scanf("%d",&element);/*Reading the element to be searched*/

    for(j=0;j<10;j++)
        if( arr[j] == element) /*Checking whether the search was successful*/
        {
            printf("\nThe element %d is present at %d position in the list\n",element,j+1);
            flag=1;
            break;
        }
    if(flag==0)/*Checking whether the search was unsuccessful*/
        printf("\nThe element is %d is not present in the list\n",element);

    getch();
}

```

(Contd.)

A.26 Computer Programming

Output

Enter the 10 elements of the array:

22

55

1

2

66

69

54

78

8

36

Enter the element that you want to search: 54

The element 54 is present at 7 position in the list

EXAMPLE A.36 Write a simple program to read integer elements into an array and compute their sum.

Program

```
/*Program for demonstrating implementation of a simple array*/
#include <stdio.h>
#include <conio.h>

void main( )
{
    int i,sum;
    int arr[5];/*Declaring an array of five elements*/
    clrscr();

    printf("Enter the array values:\n");
    for(i=0;i<5;i++)
        scanf("%d", &arr[i]);/*Reading values to be stored in the array*/

    printf("\nArray arr[5] contains the following elements:\n");
    for(i=0;i<5;i++)
        printf("arr[%d] = %d\n", i,arr[i]);/*Printing array values*/

    sum=0;
    for(i=0;i<5;i++)
        sum=sum+arr[i];/*Computing sum of elements stored in the array*/

    printf("\nSum of array elements = %d",sum); /*Displaying the result*/

    getch();
}
```

(Contd.)

Output

Enter the array values:

1
2
3
4
5

Array arr[5] contains the following elements:

arr[0] = 1
arr[1] = 2
arr[2] = 3
arr[3] = 4
arr[4] = 5

Sum of array elements = 15

EXAMPLE A.37 Write a C program to read in 10 integer numbers and print their average, minimum and maximum numbers.

Program

```
/*Program for demonstrating the use of a simple one-dimensional array*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int a[10], min, max, sum, i;
    float ave;
    clrscr();

    printf("Enter 10 integer elements: ");
    for(i=0;i<=9;i++)
        scanf("%d",&a[i]); /*Reading the input integer elements in an array*/

    min=a[0];
    max=a[0];
    sum=0;

    for(i=0;i<=9;i++)
        sum=sum+a[i];

    ave=1.0*sum/10; /*Calculating the average*/

    /*Finding minimum and maximum numbers*/
    for(i=0;i<=8;i++)
    {
        if(a[i+1]>max)
```

(Contd.)

A.28 Computer Programming

```
    max=a[i+1];
    if(a[i+1]<min)
        min=a[i+1];
    }
    /*Displaying the results*/
    printf("\nMinimum = %d, Maximum = %d, Average = %.2f",min,max,ave);
    getch();
}
```

Output

Enter 10 integer elements: 1

2

3

4

5

6

7

8

9

10

Minimum = 1, Maximum = 10, Average = 5.50

EXAMPLE A.38 Write a program to read and display a simple 3×3 matrix.

Program

```
/*Program for realizing a 3 X 3 matrix using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,a[3][3];
    clrscr();

    /*Reading matrix elements*/
    printf("Enter the elements of the 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]);
        }

    /*Printing matrix elements*/
    printf("The various elements contained in the 3 X 3 matrix are:\n");
    for(i=0;i<3;i++)
    {
        printf("\n\t\t ");
    }
}
```

(Contd.)

```

        for(j=0;j<3;j++)
            printf("%d\t",a[i][j]);
    }

    getch();
}

```

Output

Enter the elements of the 3 X 3 matrix:

```

a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9

```

The various elements contained in the 3 X 3 matrix are:

1	2	3
4	5	6
7	8	9

EXAMPLE A.39 Write a program to add two 3×3 matrices.**Program**

```

/*Program for adding two 3 X 3 matrices using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,a[3][3],b[3][3],c[3][3];
    clrscr();

    printf("Enter the first 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]);/*Reading the elements of 1st matrix*/
        }
    }

    printf("Enter the second 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {

```

(Contd.)

A.30 Computer Programming

```
        for(j=0;j<3;j++)
        {
            printf("b[%d][%d] = ",i,j);
            scanf("%d",&b[i][j]);/*Reading the elements of 2nd matrix*/
        }
    }

    printf("\nThe entered matrices are: \n");
    for(i=0;i<3;i++)
    {
        printf("\n");
        for(j=0;j<3;j++)
            printf("%d\t",a[i][j]);/*Displaying the elements of 1st matrix*/
        printf("\t\t");
        for(j=0;j<3;j++)
            printf("%d\t",b[i][j]);/*Displaying the elements of 2nd matrix*/
    }

    for(i=0;i<3;i++)
        for(j=0;j<3;j++)
            c[i][j] =a[i][j]+b[i][j];/*Computing the sum of two matrices*/

    printf("\n\nThe sum of the two matrices is shown below: \n");
    for(i=0;i<3;i++)
    {
        printf("\n\t\t\t");
        for(j=0;j<3;j++)
            printf("%d\t",c[i][j]);/*Displaying the result*/
    }

    getch();
}
```

Output

```
Enter the first 3 X 3 matrix:
a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9
Enter the second 3 X 3 matrix:
b[0][0] = 9
b[0][1] = 8
b[0][2] = 7
b[1][0] = 6
b[1][1] = 5
b[1][2] = 4
b[2][0] = 3
b[2][1] = 2
b[2][2] = 1
```

(Contd.)

The entered matrices are:

1	2	3	9	8	7
4	5	6	6	5	4
7	8	9	3	2	1

The sum of the two matrices is shown below:

10	10	10
10	10	10
10	10	10

EXAMPLE A.40 Write a program to subtract two 3×3 matrices.

The code for subtracting two 3×3 matrices is same as Example 7 with only the following difference:

Program

```
.
.
for(i=0;i<3;i++)
    for(j=0;j<3;j++)
        c[i][j]=a[i][j]-b[i][j];/*Subtracting the two matrices*/
.
.
```

Here, we are performing the subtraction operation instead of addition.

Output

Enter the first 3 X 3 matrix:

```
a[0][0] = 10
a[0][1] = 20
a[0][2] = 30
a[1][0] = 40
a[1][1] = 50
a[1][2] = 60
a[2][0] = 70
a[2][1] = 80
a[2][2] = 90
```

Enter the second 3 X 3 matrix:

```
b[0][0] = 5
b[0][1] = 10
b[0][2] = 15
b[1][0] = 20
b[1][1] = 25
b[1][2] = 30
b[2][0] = 35
b[2][1] = 40
b[2][2] = 45
```

(Contd.)

A.32 Computer Programming

The entered matrices are:

10	20	30	5	10	15
40	50	60	20	25	30
70	80	90	35	40	45

The result of subtraction is shown below:

5	10	15
20	25	30
35	40	45

EXAMPLE A.41 Write a program to multiply two 3×3 matrices.

Program

```
/*Program for multiplying two 3 X 3 matrices using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,k,a[3][3],b[3][3],c[3][3];
    clrscr();
    printf("Enter the first 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]);/*Reading the elements of the 1st matrix*/
        }
    }

    printf("Enter the second 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("b[%d][%d] = ",i,j);
            scanf("%d",&b[i][j]);/*Reading the elements of the 2nd matrix*/
        }
    }
    printf("\nThe entered matrices are: \n");

    for(i=0;i<3;i++)
    {
        printf("\n");
        for(j=0;j<3;j++)
```

(Contd.)


```

    {
        printf("%d\t",a[i][j]);/*Displaying the elements of the 1st matrix*/
    }
    printf("\t\t");
    for(j=0;j<3;j++)
    {
        printf("%d\t",b[i][j]);/*Displaying the elements of the 2nd matrix*/
    }
}
/*Multiplying the two matrices*/
for(i=0;i<3;i++)
    for(j=0;j<3;j++)
    {
        c[i][j]=0;
        for(k=0;k<3;k++)
            c[i][j]=c[i][j]+a[i][k]*b[k][j];
    }
printf("\n\nThe product of the two matrices is shown below: \n");

for(i=0;i<3;i++)
{
    printf("\n\t\t");
    for(j=0;j<3;j++)
    {
        printf("%d\t",c[i][j]); /*Displaying the result*/
    }
}

getch();
}

```

Output

```

Enter the first 3 X 3 matrix:
a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9
Enter the second 3 X 3 matrix:
b[0][0] = 9
b[0][1] = 8
b[0][2] = 7
b[1][0] = 6
b[1][1] = 5
b[1][2] = 4
b[2][0] = 3
b[2][1] = 2
b[2][2] = 1

```

(Contd.)

A.34 Computer Programming

The entered matrices are:

1	2	3	9	8	7
4	5	6	6	5	4
7	8	9	3	2	1

The product of the two matrices is shown below:

30	24	18
84	69	54
138	114	90

EXAMPLE A.42 Write a program to generate the transpose of a 3×3 matrix.

Program

```
/*Program for generating the transpose of a 3X3 matrix using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,a[3][3],b[3][3];
    clrscr();
    printf("Enter a 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]); /*Reading the elements of the 3X3 matrix*/
        }
    }

    printf("\nThe entered matrix is: \n");
    for(i=0;i<3;i++)
    {
        printf("\n");
        for(j=0;j<3;j++)
        {
            printf("%d\t",a[i][j]); /*Displaying the matrix*/
        }
    }

    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            b[i][j]=a[j][i]; /*Computing matrix transpose*/
        }
    }
```

(Contd.)

```

printf("\n\nThe transpose of the matrix is: \n");

for(i=0;i<3;i++)
{
    printf("\n");
    for(j=0;j<3;j++)
    {
        printf("%d\t",b[i][j]); /*Displaying the resultant transposed matrix*/
    }
}

getch();
}

```

Output

Enter a 3 X 3 matrix:

```

a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9

```

The entered matrix is:

1	2	3
4	5	6
7	8	9

The transpose of the matrix is:

1	4	7
2	5	8
3	6	9

EXAMPLE A.43 Write a simple program to demonstrate the use of functions in C.

Program

```

/*Program for demonstrating use of functions*/
#include <stdio.h>
#include <conio.h>

/*Declaring function prototypes*/
void Func_A(void);

```

(Contd.)

A.36 Computer Programming

```
void Func_B(void);
void Func_C(void);

void main( )
{
    clrscr();
    printf("In main function; Calling Func_A()..\n");
    Func_A(); /*Calling Function A*/
    printf("Back in main()..\n");

    getch();
}

void Func_A(void)
{
    printf("Inside Func_A(); Calling Func_B()..\n");
    Func_B(); /*Function A calls Function B*/
    printf("Back in Func_A()..\n");
}

void Func_B(void)
{
    printf("Inside Func_B(); Calling Func_C()..\n");
    Func_C(); /*Function B in turn calls Function C*/
    printf("Back in Func_B()..\n");
}

void Func_C(void)
{
    printf("Inside Func_C()..\n"); /*print statement inside Function C*/
}
```

Output

```
In main function; Calling Func_A()..
Inside Func_A(); Calling Func_B()..
Inside Func_B(); Calling Func_C()..
Inside Func_C()..
Back in Func_B()..
Back in Func_A()..
Back in main()..
```

EXAMPLE A.44 Write a program to compute the area of a rectangle.

Program

```
/*No arguments and no return values*/
#include <stdio.h>
#include <conio.h>
```

(Contd.)

```

void main()
{
    void area(void); /*Declaring the function prototype for computing area of a rectangle*/
    clrscr();

    area();/*Calling the area function*/
    getch();
}

void area()
{
    float length, breadth;

    printf("Enter the length and breadth of the rectangle:\n");
    scanf("%f %f",&length,&breadth) ;/*Reading the length and breadth values of the rectangle*/

    /*Computing and displaying the area of the rectangle*/
    printf("The area of the rectangle with length %.2f and breadth %.2f is = %.2f", length,breadth,
        (length*breadth));
}

```

Output

```

Enter the length and breadth of the rectangle:
5
10
The area of the rectangle with length 5.00 and breadth 10.00 is = 50.00

```

EXAMPLE A.45 Write a program to compute the area of a triangle.**Program**

```

/*Arguments but no return values*/
#include <stdio.h>
#include <conio.h>

void main()
{
    float base,height;
    void area(float,float); /*Declaring the function prototype for computing area of a triangle*/
    clrscr();

    printf("Enter base and height of the triangle:\n");
    scanf("%f %f",&base,&height) ;/*Reading the base and height values*/

    area(base,height); /*Calling the function by passing base and height as parameters*/

    getch();
}

```

(Contd.)

A.38 Computer Programming

```
void area(float b,float h)
{
    printf("The area of the triangle with base %.2f and height %.2f is = %.2f", b,h,(0.5*b*h));/*Displaying
the area of the triangle*/
}
```

Output

Enter base and height of the triangle:

5

8

The area of the triangle with base 5.00 and height 8.00 is = 20.00

EXAMPLE A.46 Write a program that uses functions to determine whether a given number is Armstrong or not.

Program

```
/*Arguments but no return values*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    int num;
    void arm(int);/*Declaring prototype for the function that computes Armstrong value*/
    clrscr();

    printf("\nEnter a number: ");
    scanf("%d", &num);/*Reading input integer value*/

    arm(num); /*Calling the function that assess whether num is Armstrong or not*/
    getch();
}

void arm(int n)
{
    int temp, sum=0, i;

    temp=n;

    while(temp>0)/*Computing Armstrong value*/
    {
        i=temp%10;
        sum=sum+i*i*i;
    }
}
```

(Contd.)

```

    temp=temp/10;
}

if(sum==n)/*Checking whether num is Armstrong or not*/
    printf("\n%d is an Armstrong number",n);
else
    printf("\n%d is not an Armstrong number",n);

}

```

Output

Enter a number: 371

371 is an Armstrong number

EXAMPLE A.47 Write a program that prints the ASCII value corresponding to a given character.

Program

```

/*Arguments but no return values*/
#include <stdio.h>
#include <conio.h>

void main()
{
    char ch;
    void ASCII(char); /*Declaring the function prototype for determining ASCII value*/
    clrscr();

    printf("Enter any character:\n");
    scanf("%c",&ch) ;/*Reading input character value*/

    ASCII(ch); /*Calling the ASCII function by passing ch as the parameter*/

    getch();
}

void ASCII(char c)
{
    printf("The ASCII value of %c is %d",c,c);/*Displaying the ASCII value*/
}

```

Output

Enter any character:

V

The ASCII value of V is 86

EXAMPLE A.48 Write a program to implement a simple arithmetic calculator using functions.

Program

```
/*Arguments with return values*/
#include <stdio.h>
#include <conio.h>

/*Declaring function prototypes for common arithmetic operations*/
float add(float,float);
float sub(float,float);
float mul(float,float);
float div(float,float);

void main()
{
    int choice;
    float num1, num2;
    clrscr();
    printf("*****Simple Calc*****");/*Displaying Calc options*/
    printf("\n\nChoose a type of operation from the following: ");
    printf("\n\t1.  Addition");
    printf("\n\t2.  Subtraction");
    printf("\n\t3.  Multiplication");
    printf("\n\t4.  Division\n");
    scanf("%d", &choice);/*Reading user's choice*/
    printf("\n\nEnter the two operands: ");
    scanf("%f %f", &num1, & num2);/*Reading operands*/

    /*Using the Switch statement to choose the right operation*/
    switch (choice)
    {
        case 1:
            printf("\n%.2f + %.2f = %.21f", num1, num2, add(num1,num2)); /*Calling the add function*/
            break;

        case 2:
            printf("\n%.2f - %.2f = %.21f", num1, num2, sub(num1,num2)); /*Calling the sub function*/
            break;

        case 3:
            printf("\n%.2f * %.2f = %.21f", num1, num2, mul(num1,num2)); /*Calling the mul function*/
            break;

        case 4:
            printf("\n%.2f / %.2f = %.21f", num1, num2, div(num1,num2)); /*Calling the div function*/
            break;

        default:
            printf("\nIncorrect Choice!");
    }
}
```

(Contd.)


```

    getch();
}

/*Writing function definitions*/
float add(float x,float y)
{
    return(x+y);
}

float sub(float x,float y)
{
    return(x-y);
}

float mul(float x,float y)
{
    return(x*y);
}

float div(float x,float y)
{
    return(x/y);
}

```

Output

```
*****Simple Calc*****
```

Choose a type of operation from the following:

1. Addition
2. Subtraction
3. Multiplication
4. Division

3

Enter the two operands: 5

8

5.00 * 8.00 = 40.00

EXAMPLE A.49 Write a program that uses recursion to generate the Fibonacci series.

Program

```

/*Program demonstrating the use of recursion to generate the Fibonacci series*/
#include<stdio.h>
#include<conio.h>

```

(Contd.)

A.42 Computer Programming

```
void main()
{
    int x=0,y=1,n;
    void fib(int,int,int); /*Function prototype*/
    clrscr();

    printf("Enter the number of terms in Fibonacci series: ");
    scanf("%d",&n); /*Reading number of terms in the series*/

    printf("\nThe Fibonacci series is:");
    printf("\n\n%d\t%d",x,y); /*Printing 1st two terms of the series*/

    fib(x,y,n-2); /*Function Call*/
    printf(" ");

    getch();
}

void fib(int a,int b,int n)
{
    int c;
    if(n==0)
        return;
    n--;
    c=a+b;
    printf("\t%d",c);
    fib(b,c,n); /*recursive function call*/
}
```

Output

Enter the number of terms in Fibonacci series: 8

The Fibonacci series is:

0 1 1 2 3 5 8 13

EXAMPLE A.50 Write a program that uses functions to compute the product of two given matrices.

Program

```
/*Program for multiplying two 3 X 3 matrices using functions*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,k,a[3][3],b[3][3];
    void multiply (int[][3], int[][3]); /*Declaring the function prototype for matrix multiplication*/
```

(Contd.)

```

clrscr();

printf("Enter the first 3 X 3 matrix:\n");
for(i=0;i<3;i++)
{
    for(j=0;j<3;j++)
    {
        printf("a[%d][%d] = ",i,j);
        scanf("%d",&a[i][j]);/*Reading the elements of the 1st matrix*/
    }
}

printf("Enter the second 3 X 3 matrix:\n");
for(i=0;i<3;i++)
{
    for(j=0;j<3;j++)
    {
        printf("b[%d][%d] = ",i,j);
        scanf("%d",&b[i][j]);/*Reading the elements of the 2nd matrix*/
    }
}
printf("\nThe entered matrices are: \n");

for(i=0;i<3;i++)
{
    printf("\n");
    for(j=0;j<3;j++)
    {
        printf("%d\t",a[i][j]);/*Displaying the elements of the 1st matrix*/
    }
    printf("\t\t");
    for(j=0;j<3;j++)
    {
        printf("%d\t",b[i][j]);/*Displaying the elements of the 2nd matrix*/
    }
}

multiply(a,b); /*Calling the multiply function to compute the product of a and b*/
getch();
}

void multiply(int x[][3],int y[][3])
{
    int c[3][3],i,j,k;

/*Multiplying the two matrices*/
    for(i=0;i<3;i++)

```

(Contd.)

A.44 Computer Programming

```
for(j=0;j<3;j++)
{
    c[i][j]=0;
    for(k=0;k<3;k++)
        c[i][j]=c[i][j]+x[i][k]*y[k][j];
}
printf("\n\nThe product of the two matrices is shown below: \n");

for(i=0;i<3;i++)
{
    printf("\n\t\t");
    for(j=0;j<3;j++)
    {
        printf("%d\t",c[i][j]); /*Displaying the result*/
    }
}
```

Output

Enter the first 3 X 3 matrix:

a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9

Enter the second 3 X 3 matrix:

b[0][0] = 10
b[0][1] = 10
b[0][2] = 10
b[1][0] = 20
b[1][1] = 20
b[1][2] = 20
b[2][0] = 30
b[2][1] = 30
b[2][2] = 30

The entered matrices are:

1	2	3	10	10	10
4	5	6	20	20	20
7	8	9	30	30	30

The product of the two matrices is shown below:

140	140	140
320	320	320
500	500	500

EXAMPLE A.51 Write a program to generate the one's complement of a given binary number.**Program**

```

/*Program for demonstrating the passing of a string as a parameter to a function*/
#include <stdio.h>
#include <conio.h>

char b[16]; /*array for storing the result of one's complement*/

void main()
{
    char a[16];
    int i;
    void ones(char[]); /*Declaring the function prototype for generating one's complement*/
    clrscr();

    printf("Enter a binary number: ");
    gets(a); /*Reading the input binary number*/

    ones(a); /*Calling the function by passing input binary string a*/

    printf("\nThe 1's compliment of %s is %s", a,b); /*Displaying the result*/
    getch();
}

void ones(char str[])
{
    int i;
    char C[16];
    for(i=0;str[i]!='\0'; i++)
    {
        if (str[i]!='0' && str[i]!='1')
        {
            printf("\nIncorrect binary number format...the program will quit");
            getch();
            exit(0);
        }
        /*Changing the binary digits from 0 to 1 and vice versa*/
        if (str[i]=='0')
            b[i]='1';
        else
            b[i]='0';
    }
    b[i]='\0';
}

```

Output

Enter a binary number: 11001001

The 1's compliment of 11001001 is 00110110

EXAMPLE A.52 Write a program to compute the two's compliment.**Program**

```

/*Program for demonstrating the use of global variables*/
#include <stdio.h>
#include <conio.h>
#include <string.h>

char a[16]; /*Declaring a character array as a global variable*/

void main()
{
    void twos(void); /*Declaring the function prototype for computing two's compliment*/
    clrscr();
    printf("Enter a binary number: ");
    gets(a); /*Reading a binary string*/

    twos(); /*Calling the function*/

    printf("\n2's compliment = %s",a); /*Printing the result stored in a by the twos function*/
    getch();
}

void twos(void)
{
    int i,j,k,len;
    len=strlen(a);
    for(k=0;a[k]!='\0'; k++)
    {
        if (a[k]!='0' && a[k]!='1')
        {
            printf("\nIncorrect binary number format...the program will quit");
            getch();
            exit(0);
        }
    }
    /*Computing the two's compliment*/
    for(i=len-1;a[i]!='1'; i--)
    ;
    for(j=i-1;j>=0;j--)
    {
        if(a[j]=='1')
            a[j]='0';
        else
            a[j]='1';
    }
}

```

Output

Enter a binary number: 10100011

2's compliment = 01011101

EXAMPLE A.53 Write a program to compute x^y .**Program**

```

/*Program for demonstrating the use of built-in function pow()*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    int x,y;
    long result;
    clrscr();

    printf("\nEnter the values of x and y:\n");
    scanf("%d %d",&x,&y);

    result=pow(x,y); /*Calling the built-in function pow()*/
    printf("\n%d raised to the power of %d = %ld",x, y, result);/*Displaying the result*/

    getch();
}

```

Output

```

Enter the values of x and y:
2
6

2 raised to the power of 6 = 64

```

EXAMPLE A.54 Write a program to compute the square root of an integer.**Program**

```

/*Program for demonstrating the use of built-in function pow()*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    float x;
    double result;
    clrscr();

    printf("\nEnter the value of x:\n");
    scanf("%f",&x); /*Reading the input value x*/

    result=sqrt(x); /*Calling the built-in function sqrt()*/
}

```

(Contd.)

A.48 Computer Programming

```
printf("\nThe square root of %.2f is = %.21f",x, result);/*Displaying the result*/  
  
getch();  
}
```

Output

Enter the value of x:
50

The square root of 50.00 is = 7.07

EXAMPLE A.55 Write a program that generates random numbers.

Program

```
/*Program for demonstrating the use of built-in function rand()*/  
#include <stdio.h>  
#include <conio.h>  
#include <stdlib.h>  
#include <time.h>  
  
void main()  
{  
clrscr();  
  
srand(time(NULL)); /*Specifying time value as an input to random number generator*/  
printf("The system generated random number is: %d", rand()); /*Calling the rand() function to generate  
the random number*/  
  
getch();  
}
```

Output

The system generated random number is: 18081

EXAMPLE A.56 Write a program to draw a circle.


Program

```
/*Program for demonstrating the use of built-in Graphics functions of C*/  
#include<stdio.h>  
#include<conio.h>  
#include<graphics.h>  
  
void main()  
{  
int gd = DETECT, gm;
```

(Contd.)


```
initgraph(&gd, &gm, "..\\bgi"); /*Initializing the graphics system*/  
  
circle(320, 225, 50); /*Calling the built in function circle()*/  
getch();  
closegraph(); /*Shutting the graphics system*/  
}
```

Output



EXAMPLE A.57 Write a program to draw a rectangle.

Program

```
/*Program for demonstrating the use of built-in graphics functions of C*/  
#include<conio.h>  
#include<graphics.h>  
#include<stdio.h>  
  
void main()  
{  
    int gd = DETECT, gm;  
    initgraph(&gd, &gm, "..\\bgi"); /*Initializing the graphics system*/  
  
    rectangle(320, 225, 50,100); /*Calling the built-in function rectangle()*/  
    getch();  
    closegraph(); /*Shutting the graphics system*/  
}
```

Output



EXAMPLE A.58 Write a program to create a 3D bar.


Program

```
/*Program for demonstrating the use of built-in graphics functions of C*/
#include<conio.h>
#include<graphics.h>
#include<stdio.h>

void main()
{
    int gd = DETECT, gm;
    initgraph(&gd, &gm, "..\\bgi"); /*Initializing the graphics system*/

    bar3d(150, 50, 250,150, 10, 1); /*Calling the built-in graphics function bar3d()*/
    getch();
    closegraph(); /*Shutting the graphics system*/
}
```

Output



EXAMPLE A.59 Write a program to create a shape and fill it with color.

Program


```
/*Program for demonstrating the use of built-in graphics functions of C*/
#include<conio.h>
#include<graphics.h>
#include<stdio.h>

void main()
{
    int gd = DETECT, gm;
    initgraph(&gd, &gm, "..\\bgi"); /*Initializing the graphics system*/

    setfillstyle(SOLID_FILL,RED); /*Setting the fill pattern and color*/
```

(Contd.)

```
bar3d(150, 50, 250,150, 10, 1); /*Calling the built-in function bar3d()*/
getch();
closegraph(); /*Shutting the graphics system*/
}
```

Output

EXAMPLE A.60 Write a program to print the marks obtained by two students using structures.

Program

```
/*Program for demonstrating structure member initialization*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    struct student /*Declaring the student structure*/
    {
        int marks1, marks2, marks3;
    };

    struct student std1 = {55,66,80}; /*Initializing marks for student 1*/
    struct student std2 = {60,85,78}; /*Initializing marks for student 2*/
    clrscr();

    /*Displaying marks for student 1*/
    printf("Marks obtained by 1st student: %d, %d and %d",std1.marks1, std1.marks2, std1.marks3);

    /*Displaying marks for student 2*/
    printf("\nMarks obtained by 2nd student: %d, %d and %d",std2.marks1, std2.marks2, std2.marks3);

    getch();
}
```

Output

```
Marks obtained by 1st student: 55, 66 and 80
Marks obtained by 2nd student: 60, 85 and 78
```

EXAMPLE A.61 Write a program that uses a simple structure for storing different students' details.

Program

```
/*Program for creating a simple student structure*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    int num, i=0;
    struct student /*Declaring the student structure*/
    {
        char name[30];
        int rollno;
        int t_marks;
    };
    struct student std[10];
    clrscr();

    /*Reading the number of students for which details are to be entered*/
    printf("Enter the number of students: ");
    scanf("%d",&num);

    /*Reading the student details*/
    for(i=0;i<num;i++)
    {
        printf("\nEnter the details for %d student",i+1);
        printf("\n\n Name ");
        scanf("%s",std[i].name);
        printf("\n Roll No. ");
        scanf("%d",&std[i].rollno);
        printf("\n Total Marks ");
        scanf("%d",&std[i].t_marks);
    }

    /*Displaying the student details*/
    printf("\n Press any key to display the student details!");
    getch();

    for(i=0;i<num;i++)
        printf("\nstudent %d \n Name %s \n Roll No. %d \n Total Marks %d\n",i+1,std[i].name, std[i].rollno,
std[i].t_marks);

    getch();
}
```

Output

Enter the number of students: 2

Enter the details for 1 student

Name Ajay

(Contd.)

```

Roll No. 2

Total Marks 343

Enter the details for 2 student

Name Arun

Roll No. 6

Total Marks 325

Press any key to display the student details!
student 1
Name Ajay
Roll No. 2
Total Marks 343

student 2
Name Arun
Roll No. 6
Total Marks 325

```

EXAMPLE A.62 Write a simple program to demonstrate the process of defining a structure variable and assigning values to its members.

Program

```

/*Program to demonstrate how to define a structure and assign values to its members*/
#include <stdio.h>
#include <conio.h>

void main()
{
    struct personal/*Defining a structure*/
    {
        char name[20];
        int day;
        char month[10];
        int year;
        float salary;
    };

    struct personal person;/*Declaring a structure variable*/
    clrscr();

    /*Reading values for structure members*/
    printf("Enter the Values (name, day, month, year, salary): \n");
    scanf("%s %d %s %d %f",person.name,&person.day,person.month,&person.year,&person.salary);

```

(Contd.)

A.54 Computer Programming

```
/*Displaying the values*/
printf("%s %d %s %d, %.2f\n",person.name,person.day,person.month,person.year,person.salary);

getch();
}
```

Output

```
Enter the Values (name, day, month, year, salary):
Arun
22
9
1971
12000
Arun 22 9 1971, 12000.00 X
```

EXAMPLE A.63 Write a program to realize the concept of complex numbers using structures and also print the sum of two complex number variables.

Program

```
/*Program for realizing complex numbers using structures*/
#include <stdio.h>
#include <conio.h>
#include <math.h>

void main()
{
    struct complex/*Declaring the complex number datatype using structure*/
    {
        double real;/*Real part*/
        double img;/*Imaginary part*/
    };
    struct complex c1, c2, c3;
    clrscr();
    /*Reading the 1st complex number*/
    printf("\n Enter two Complex Numbers (x+iy):\n\n Real Part of First Number: ");
    scanf("%lf",&c1.real);
    printf("\n Imaginary Part of First Number: ");
    scanf("%lf",&c1.img);

    /*Reading the 2nd complex number*/
    printf("\n Real Part of Second Number: ");
    scanf("%lf",&c2.real);
    printf("\n Imaginary Part of Second Number: ");
    scanf("%lf",&c2.img);

    /*Performing complex number addition*/
    c3.real=c1.real+c2.real;
    c3.img=c1.img+c2.img;
```

(Contd.)

```
printf("\n\n%.21f+("%.21f)i + %.21f+("%.21f)i = %.21f+("%.21f)i", c1.real, c1.img, c2.real, c2.img,
      c3.real, c3.img);
```

```
getch();
}
```

Output

Enter two Complex Numbers (x+iy):

Real Part of First Number: 1

Imaginary Part of First Number: 2

Real Part of Second Number: 3

Imaginary Part of Second Number: 4

1.00+(2.00)i + 3.00+(4.00)i = 4.00+(6.00)i

EXAMPLE A.64 Write a program to read the marks obtained by a student in three subjects and compute its sum and average.

Program

```
/*Program for demonstrating operations on individual structure members*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    struct student/*Declaring the student structure*/
    {
        int marks1, marks2, marks3,sum;
        float ave;
    };
    struct student std1;
    clrscr();

    /*Reading marks for the student*/
    printf("Enter the marks obtained by the student in three subjects: ");
    scanf("%d %d %d",&std1.marks1, &std1.marks2, &std1.marks3);

    std1.sum = std1.marks1 + std1.marks2 + std1.marks3;
    std1.ave = (std1.marks1 + std1.marks2 + std1.marks3)/3;

    /*Displaying sum and average*/
    printf("Sum = %d\nAverage = %.2f",std1.sum, std1.ave);
```

(Contd.)

A.56 Computer Programming

```
    getch();  
}
```

Output

```
Enter the marks obtained by the student in three subjects: 55  
65  
89  
Sum = 209  
Average = 69.00
```

EXAMPLE A.65 Implement the problem in Example 1 using pointer notation.

Program

```
/*Program for demonstrating structure member initialization using pointers*/  
#include <stdio.h>  
#include <conio.h>  
  
void main ()  
{  
    struct student/*Declaring the student structure*/  
    {  
        int marks1, marks2, marks3;  
    }s1,s2;  
    struct student *std1, *std2;/*Declaring pointer to structure*/  
    clrscr();  
    std1=&s1;  
    std2=&s2;  
  
    /*Assigning values to structure members using pointer notation*/  
    std1->marks1=55;  
    std1->marks2=66;  
    std1->marks3=80;  
    std2->marks1=60;  
    std2->marks2=85;  
    std2->marks3=78;  
  
    /*Displaying marks for student 1*/  
    printf("Marks obtained by 1st student: %d, %d and %d",std1->marks1, std1->marks2, std1->marks3);  
  
    /*Displaying marks for student 2*/  
    printf("\nMarks obtained by 2nd student: %d, %d and %d",std2->marks1, std2->marks2, std2->marks3);  
  
    getch();  
}
```

Output

```
Marks obtained by 1st student: 55, 66 and 80  
Marks obtained by 2nd student: 60, 85 and 78
```


EXAMPLE A.66 Implement the problem in Example 5 using pointer notation.**Program**

```

/*Program for demonstrating operations on individual structure members using pointer notation*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    struct student /*Declaring the student structure*/
    {
        int marks1, marks2, marks3, sum;
        float ave;
    } s1;
    struct student *std1; /*Declaring pointer to structure*/
    clrscr();
    std1 = &s1;

    /*Reading marks for the student*/
    printf("Enter the marks obtained by the student in three subjects: ");
    scanf("%d %d %d", &s1.marks1, &s1.marks2, &s1.marks3);

    /*Performing arithmetic operations on structure members*/
    std1->sum = std1->marks1 + std1->marks2 + std1->marks3;
    std1->ave = (std1->marks1 + std1->marks2 + std1->marks3)/3;

    /*Displaying sum and average*/
    printf("Sum = %d\nAverage = %.2f", std1->sum, std1->ave);

    getch();
}

```

Output

```

Enter the marks obtained by the student in three subjects: 69
89
55
Sum = 213
Average = 71.00

```

EXAMPLE A.67 Implement the following student information fields using structures:

Roll No
 Name (First, Middle, Last)
 DOB (Day, Month, Year)
 Course (Elective1, Elective2)

Program

```

/*Program for demonstrating nesting of structures*/
#include <stdio.h>

```

(Contd.)

A.58 Computer Programming

```
#include <conio.h>

void main ()
{
    struct student /*Declaring the nested structure*/
    {
        int roll_no;
        struct name
        {
            char First[20];
            char Middle[20];
            char Last[20];
        } st_name;
        struct dob
        {
            int day;
            int month;
            int year;
        } st_dob;
        struct course
        {
            char elective1[20];
            char elective2[20];
        } st_course;
    };
    struct student std1;
    clrscr();

    /*Initializing structure variable std1*/
    std1.roll_no=21;
    strcpy(std1.st_name.First,"Tulsi");
    strcpy(std1.st_name.Middle,"K");
    strcpy(std1.st_name.Last,"Shanta");
    std1.st_dob.day=2;
    std1.st_dob.month=2;
    std1.st_dob.year=1981;
    strcpy(std1.st_course.elective1,"Mechanics");
    strcpy(std1.st_course.elective2,"Animation");

    /*Printing the values of std1*/
    printf("\nRoll No.: %d",std1.roll_no);
    printf("\nName: %s %s %s",std1.st_name.First,std1.st_name.Middle,std1.st_name.Last);
    printf("\nDate of Birth (DD MM YYYY): %d %d %d",std1.st_dob.day,std1.st_dob.month,std1.st_dob.year);
    printf("\nCourse ELectives: %s & %s",std1.st_course.elective1,std1.st_course.elective2);

    getch();
}
```

Output

```
Roll No.: 21
Name: Tulsi K Shanta
Date of Birth (DD MM YYYY): 2 2 1981
Course ELectives: Mechanics & Animation
```

EXAMPLE A.68 Implement the following employee information fields using structures:

Employee ID
 Name (First, Middle, Last)
 DOJ,
 Gross Salary (HRA, BASIC, Special Allowance).

Program

```

/*Program for demonstrating nesting of structures*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    struct employee/*Declaring the nested structure*/
    {
        int emp_id;
        struct name
        {
            char First[20];
            char Middle[20];
            char Last[20];
        }emp_name;
        char doj[20];
        struct G_Sal
        {
            float basic;
            float hra;
            float spl_allow;
        }emp_sal;
    };
    struct employee emp1;
    clrscr();

    /*Initializing structure variable emp1*/
    emp1.emp_id=37;
    strcpy(emp1.emp_name.First,"N");
    strcpy(emp1.emp_name.Middle,"Siva");
    strcpy(emp1.emp_name.Last,"Kumar");
    strcpy(emp1.doj,"22/10/2004");
    emp1.emp_sal.basic=17432.00;
    emp1.emp_sal.hra=10032.00;
    emp1.emp_sal.spl_allow=5000.00;

    /*Printing the values of emp1*/
    printf("\nEmp ID: %d",emp1.emp_id);
    printf("\nName: %s %s %s",emp1.emp_name.First,emp1.emp_name.Middle,emp1.emp_name.Last);
    printf("\nDate of Joining (DD MM YYYY): %s",emp1.doj);
    printf("\nGross Salary: %.2f",emp1.emp_sal.basic+emp1.emp_sal.hra+emp1.emp_sal.spl_allow);

    getch();
}

```

(Contd.)

A.60 Computer Programming

Output

Emp ID: 37
Name: N Siva Kumar
Date of Joining (DD MM YYYY): 22/10/2004
Gross Salary: 32464.00

EXAMPLE A.69 Write a simple program to demonstrate the use of unions.

Program

```
/*Program for demonstrating the use of unions*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    union student/*Declaring union*/
    {
        int roll_no;
        char result;
    }st1,st2;
    clrscr();

    /*Initializing union variables*/
    st1.roll_no=20;
    st2.result='P';

    /*Accessing and printing the values correctly*/
    printf("\nRoll NO: %d",st1.roll_no);
    printf("\nResult: %c",st2.result);

    printf("\n\n");

    /*Accessing and printing the values incorrectly*/
    printf("\nRoll NO: %d",st2.roll_no);
    printf("\nResult: %c",st1.result);

    getch();
}
```

Output

Roll NO: 20
Result: P

Roll NO: 12880
Result: ¶

EXAMPLE A.70 Write a program to display the size of a structure variable.**Program**

```

/*Program for demonstrating the use of sizeof operator with structures*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    struct s/*Declaring a structure*/
    {
        int a;
        char b;
        float c;
        long d;
    }s1;
    clrscr();

    /*Printing the size of structure variable s1*/
    printf("\nSize of (s1) = %d",sizeof(s1));

    getch();
}

```

Output

Size of (s1) = 11

EXAMPLE A.71 Write a program that uses the sizeof operator to differentiate between structures and unions.**Program**

```

/*Program for differentiating between structure and union*/
#include <stdio.h>
#include <conio.h>

void main ()
{
    struct s/*Declaring a structure*/
    {
        int a;
        char b;
        float c;
        long d;
    }s1;

    union u/*Declaring a union*/
    {
        int a;

```

(Contd.)

A.62 Computer Programming

```
char b;
float c;
long d;
}u1;
clrscr();

/*Printing the sizes of structure and union variables*/
printf("\nSize of (s1) = %d",sizeof(s1));
printf("\nSize of (u1) = %d",sizeof(u1));

getch();
}
```

Output

```
Size of (s1) = 11
Size of (u1) = 4
```

EXAMPLE A.72 Write a simple program to open and close a file; or print an error message in case of unsuccessful operation.

Program

```
/*Program for opening and closing a file*/
/*Source.txt file is placed at ../bin/ location*/
#include <stdio.h>
#include <conio.h>

void main()
{
    FILE *fs; /*Declaring file access pointer*/
    char ch;
    clrscr();

    fs = fopen("Source.txt","r"); /*Opening a file*/
    if(fs==NULL)
    {
        printf("Source file cannot be opened."); /*Displaying error message incase of unsuccessful opening of
the file*/
        getch();
        exit(0);
    }
    else
        printf("\nFile Source.txt successfully opened");

    fclose(fs); /*Closing the file*/
    printf("\nFile Source.txt successfully closed");

    printf("\nPrint any key to end the program execution");
    getch();
}
```

(Contd.)

Output

```
File Source.txt successfully opened
File Source.txt successfully closed
Print any key to end the program execution
```

EXAMPLE A.73 Write a program to copy the contents of one file into another.**Program**

```
/*Program for copying contents of one file into another*/
/*Source.txt file is placed at ../bin/ location*/
#include <stdio.h>
#include <conio.h>

void main()
{
    FILE *fs,*ft; /*Declaring file access pointers*/
    char ch;
    clrscr();

    fs = fopen("Source.txt","r"); /*Opening the source file in read mode*/
    if(fs==NULL)
    {
        printf("Source file cannot be opened.");
        exit(0);
    }
    ft = fopen("Destination.txt","w"); /*Opening the target file in write mode*/
    if (ft==NULL)
    {
        printf("Target file cannot be opened.");
        fclose(fs);
        exit(0);
    }
    while(1)
    {
        ch=fgetc(fs); /*Reading contents of Source.txt character by character*/
        if (ch==EOF)
            break;
        else
            fputc(ch,ft); /*Copying Source.txt file contents into Destination.txt one character at a time*/
    }
    /*Closing the files*/
    fclose(fs);
    fclose(ft);
    printf("\nFile copy operation performed successfully");
    printf("\nYou can confirm the same by checking the Destination.txt file");
    getch();
}
```

Output

```
File copy operation performed successfully
You can confirm the same by checking the Destination.txt file
```

EXAMPLE A.74 Write a program to count the number of characters in a file.

Program

```
/*Program for counting the number of characters present in a file*/
/*Source.txt file is placed at ../bin/ location*/
#include <stdio.h>
#include <conio.h>

void main()
{
    FILE *fs; /*Declaring the file access pointer*/
    char ch;
    long count=0; /*Declaring the count variable*/
    clrscr();

    fs = fopen("Source.txt","r"); /*Opening the source file*/
    if(fs==NULL)
    {
        printf("Source file cannot be opened.");
        exit(0);
    }

    while(1)
    {
        ch=fgetc(fs);
        if (ch==EOF)
            break;
        else
            count=count+1; /*Counting the number of characters present in the source file*/
    }

    fclose(fs);
    printf("\nThe number of characters in %s is %ld", "Source.txt", count);
    getch();
}
```

Output

The number of characters in Source.txt is 41

EXAMPLE A.75 Write a program to read the contents of one file and write them in reverse order in another file.

Program

```
/*Program for reading file contents and printing its reverse*/
/*Source.txt file is placed at ../bin/ location*/
#include <stdio.h>
#include <conio.h>
```

(Contd.)


```

void main()
{
    FILE *fs,*ft; /*Declaring file access pointers*/
    char str[100];
    int i;
    clrscr();

    fs = fopen("Source.txt","r"); /*Opening the source file in read mode*/
    if(fs==NULL)
    {
        printf("Source file cannot be opened.");
        exit(0);
    }
    ft = fopen("Target.txt","w"); /*Opening the target file in write mode*/
    if (ft==NULL)
    {
        printf("Target file cannot be opened.");
        fclose(fs);
        exit(0);
    }

    i=0;
    while(1)
    {
        str[i]=fgetc(fs); /*Reading contents of Source.txt character by character*/
        if (str[i]==EOF)
            break;
        else
            i=i+1;
    }

    for(i=strlen(str)-2;i>=0;i--)
        fputc(str[i],ft); /*Writing the reverse of file contents*/

    /*Closing the files*/
    fclose(fs);
    fclose(ft);

    printf("\nContents of Source.txt successfully printed in reverse order in Target.txt");
    printf("\nYou can confirm the same by checking the Target.txt file");
    getch();
}

```

Output

Contents of Source.txt successfully printed in reverse order in Target.txt
 You can confirm the same by checking the Target.txt file

EXAMPLE A.76 Write a program to read a list of integers from one file and copy the same in reverse order in another file.

Program

```

/*Program for demonstrating the use of getw and putw*/
#include <stdio.h>
#include <conio.h>
/*
This program uses source file named S1, which contains the following elements:
1
2
3
4
5
*/

void main()
{
    FILE *fs,*ft,*fp; /*Declaring file access pointers*/
    int i,j,arr[10],num;
    clrscr();

    fs = fopen("S1","r"); /*Opening the source file in read mode*/
    if (fs==NULL)
    {
        printf("Source file cannot be opened.");
        exit(0);
    }

    ft = fopen("S2","w"); /*Opening the destination file in write mode*/
    if (ft==NULL)
    {
        printf("Target file cannot be opened.");
        fclose(fs);
        exit(0);
    }

    i=0;

    while((arr[i]=getw(fs))!=EOF) /*Reading integers from source file and storing them in array arr[]*/
        i=i+1;
    fclose(fs);

    for(j=i-1;j>=0;j--)
        putw(arr[j],ft); /*Copying the source integer list into target file in reverse order*/
    fclose(ft);

    /*Verifying the contents of the target file*/
    fp = fopen("T2","r");
    if (fp==NULL)
    {
        printf("Target file cannot be opened.");
    }
}

```

(Contd.)

```

    exit(0);
}
printf("Contents of the newly written file are:\n");
while((num=getw(fp))!=EOF)
    printf("%d\n",num);
fclose(fp);

getch();
}

```

Output

```

Contents of the newly written file are:
5
4
3
2
1

```

EXAMPLE A.77 Write a program for reading integers from a file and writing square of those integers into another file.

Program

```

/*Program for demonstrating the use of fprintf and fscanf*/
/*Source.txt file is placed at ../bin/ location; assuming that it contains 10 integer values*/
#include<stdio.h>
#include<stdlib.h>
#include<conio.h>

void main()
{
    FILE *fs,*ft; /*Declaring file access pointers*/
    int c;
    clrscr();

    fs=fopen("Source.txt","r"); /*Opening the source file*/
    if(fs==NULL)
    {
        printf("Cannot open source file");
        exit(1);
    }

    ft=fopen("Target.txt","w"); /*Opening the target file*/
    if(ft==NULL)
    {
        printf("Cannot open target file");
        fclose(fs);
        exit(0);
    }
    for(;fscanf(fs,"%d",&c)!=EOF;)/ *Using fscanf for reading integers from file*/

```

(Contd.)

A.68 Computer Programming

```
fprintf(ft," %d ",(c*c));/*Using fprintf for writing integers to a file*/

printf("The square of the 10 integers contained in source file have been computed and copied to the
target file. You can open the Target.txt file for validation");
fclose(fs);
fclose(ft);

getch();
}
```

Output

The square of the 10 integers contained in source file have been computed and copied to the target file. You can open the Target.txt file for validation

EXAMPLE A.78 Write a program that reads list of integers from two different files and merges and stores them in a single file.

Program

```
/*Program for demonstrating the use of fseek*/
/*Source1.txt and Source2.txt files containing integer lists are placed at ../bin/ location*/
#include<stdio.h>
#include<conio.h>

void main()
{
    FILE *fs,*ft;/*Declaring file access pointers*/
    int c;
    clrscr();

    fs=fopen("Source1.txt","r");/*Opening the 1st source file*/
    if(fs==NULL)
    {
        printf("Cannot open source file");
        exit(1);
    }

    ft=fopen("Target.txt","w");/*Opening the target file*/
    if(ft==NULL)
    {
        printf("Cannot open target file");
        fclose(fs);
        exit(0);
    }

    for(;fscanf(fs,"%d",&c)!=EOF;){/*Using fscanf for reading integers from file*/
        fprintf(ft," %d ",(c));/*Using fprintf for writing integers to a file*/

        /*Closing the file streams*/
        fclose(fs);
```

(Contd.)

```

fclose(ft);

fs=fopen("Source2.txt","r");/*Opening the 2nd source file*/
if(fs==NULL)
{
    printf("Cannot open source file");
    exit(1);
}

ft=fopen("Target.txt","r+");/*Opening the target file again*/
if(ft==NULL)
{
    printf("Cannot open target file");
    fclose(fs);
    exit(0);
}

fseek(ft,0L,2);/*Using fseek to move to the end of the file*/

for(;fscanf(fs,"%d",&c)!=EOF;){/*Reading integers from file*/
    fprintf(ft," %d ",(c));/*Writing integers to the file*/

/*Closing the file streams*/
fclose(fs);
fclose(ft);
printf("Files merged successfully; you can check the output by opening Target.txt file");

    getch();
}

```

Output

Files merged successfully; you can check the output by opening Target.txt file

EXAMPLE A.79 Write a program to open a file using command line arguments and display its contents.

Program

```

/* Program for demonstrating the use of command line arguments*/
/*Program file name: fileopen.c*/
/*Assuming source file Source.txt is placed inside the ../bin/ location*/
#include <stdio.h>
#include <conio.h>

void main(int argc, char *argv[])
{
    char ch;
    FILE *fp;

    if(argc!=2)/*Checking the number of arguments given at command line*/

```

(Contd.)

A.70 Computer Programming

```
{
puts("Improper number of arguments.");
exit(0);
}

fp = fopen(argv[1],"r"); /*Opening the file in read mode*/
if(fp == NULL)
{
puts("File cannot be opened.");
exit(0);
}

printf("Contents of file are:\n");
while(1)
{
ch=fgetc(fp);/*Reading contents of Source.txt character by character*/
if (ch==EOF)
break;
else
printf("%c",ch); /*Displaying the file contents*/
}

fclose(fp);/*Closing the source file*/
getch();
}
```

Output

```
D:\TC\BIN>fileopen
Improper number of arguments.

D:\TC\BIN>fileopen Source.txt
Contents of file are:
Hey! We are inside the Source.txt file...
```

Appendix B

B.1 MATRIX OPERATIONS

A matrix can be logically represented with the help of multi-dimensional arrays. For example, A[2][2] represents a 2X2 matrix, as shown in Figure B.1:

$$\begin{pmatrix} A[0][0] & A[0][1] \\ A[1][0] & A[1][1] \end{pmatrix}$$

Fig. B.1. A 2X2 Matrix

Several matrix operations can be performed with the help of multi-dimensional arrays. The following examples depict some of these operations.

EXAMPLE B.1 Write a program to read and display a simple 3 X 3 matrix.

Program

```
/*Program for realizing a 3 X 3 matrix using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,a[3][3];
    clrscr();

    /*Reading matrix elements*/
    printf("Enter the elements of the 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]);
        }

    /*Printing matrix elements*/
    printf("The various elements contained in the 3 X 3 matrix are:\n");
```

(Contd.)

B.2 Computer Programming

```
for(i=0;i<3;i++)
{
    printf("\n\t\t");
    for(j=0;j<3;j++)
        printf("%d\t",a[i][j]);
}

getch();
}
```

Output

Enter the elements of the 3 X 3 matrix:

a[0][0] = 1

a[0][1] = 2

a[0][2] = 3

a[1][0] = 4

a[1][1] = 5

a[1][2] = 6

a[2][0] = 7

a[2][1] = 8

a[2][2] = 9

The various elements contained in the 3 X 3 matrix are:

1	2	3
4	5	6
7	8	9

EXAMPLE B.2 Write a program to add two 3 X 3 matrices.

Program

```
/*Program for adding two 3 X 3 matrices using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,a[3][3],b[3][3],c[3][3];
    clrscr();

    printf("Enter the first 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]);/*Reading the elements of 1st matrix*/
        }
    }
}
```

(Contd.)


```

printf("Enter the second 3 X 3 matrix:\n");
for(i=0;i<3;i++)
{
    for(j=0;j<3;j++)
    {
        printf("b[%d][%d] = ",i,j);
        scanf("%d",&b[i][j]);/*Reading the elements of 2nd matrix*/
    }
}

printf("\nThe entered matrices are: \n");
for(i=0;i<3;i++)
{
    printf("\n");
    for(j=0;j<3;j++)
        printf("%d\t",a[i][j]);/*Displaying the elements of 1st matrix*/
    printf("\t\t");
    for(j=0;j<3;j++)
        printf("%d\t",b[i][j]);/*Displaying the elements of 2nd matrix*/
}

for(i=0;i<3;i++)
    for(j=0;j<3;j++)
        c[i][j] = a[i][j]+b[i][j];/*Computing the sum of two matrices*/

printf("\n\nThe sum of the two matrices is shown below: \n");
for(i=0;i<3;i++)
{
    printf("\n\t\t");
    for(j=0;j<3;j++)
        printf("%d\t",c[i][j]);/*Displaying the result*/
}

getch();
}

```

Output

```

Enter the first 3 X 3 matrix:
a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9
Enter the second 3 X 3 matrix:
b[0][0] = 9
b[0][1] = 8
b[0][2] = 7
b[1][0] = 6
b[1][1] = 5

```

(Contd.)

B.4 Computer Programming

```
b[1][2] = 4
b[2][0] = 3
b[2][1] = 2
b[2][2] = 1
```

The entered matrices are:

1	2	3	9	8	7
4	5	6	6	5	4
7	8	9	3	2	1

The sum of the two matrices is shown below:

10	10	10
10	10	10
10	10	10

EXAMPLE B.3 Write a program to multiply two 3 X 3 matrices.

Program

```
/*Program for multiplying two 3 X 3 matrices using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,k,a[3][3],b[3][3],c[3][3];
    clrscr();
    printf("Enter the first 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]);/*Reading the elements of the 1st matrix*/
        }
    }

    printf("Enter the second 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("b[%d][%d] = ",i,j);
            scanf("%d",&b[i][j]);/*Reading the elements of the 2nd matrix*/
        }
    }
    printf("\nThe entered matrices are: \n");

    for(i=0;i<3;i++)
    {
```

(Contd.)

```

printf("\n");
for(j=0;j<3;j++)
{
    printf("%d\t",a[i][j]);/*Displaying the elements of the 1st matrix*/
}
printf("\t\t");
for(j=0;j<3;j++)
{
    printf("%d\t",b[i][j]);/*Displaying the elements of the 2nd matrix*/
}
}
/*Multiplying the two matrices*/
for(i=0;i<3;i++)
for(j=0;j<3;j++)
{
    c[i][j]=0;
    for(k=0;k<3;k++)
        c[i][j]=c[i][j]+a[i][k]*b[k][j];
}
printf("\n\nThe product of the two matrices is shown below: \n");

for(i=0;i<3;i++)
{
    printf("\n\t\t");
    for(j=0;j<3;j++)
    {
        printf("%d\t",c[i][j]); /*Displaying the result*/
    }
}

getch();
}

```

Output

```

Enter the first 3 X 3 matrix:
a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9
Enter the second 3 X 3 matrix:
b[0][0] = 9
b[0][1] = 8
b[0][2] = 7
b[1][0] = 6
b[1][1] = 5
b[1][2] = 4
b[2][0] = 3
b[2][1] = 2
b[2][2] = 1

```

(Contd.)

B.6 Computer Programming

The entered matrices are:

1	2	3	9	8	7
4	5	6	6	5	4
7	8	9	3	2	1

The product of the two matrices is shown below:

30	24	18
84	69	54
138	114	90

EXAMPLE B.4 Write a program to generate the transpose of a 3X3 matrix.

Program

```
/*Program for generating the transpose of a 3X3 matrix using 2-D arrays*/
#include <stdio.h>
#include <conio.h>

void main()
{
    int i,j,a[3][3],b[3][3];
    clrscr();
    printf("Enter a 3 X 3 matrix:\n");
    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
        {
            printf("a[%d][%d] = ",i,j);
            scanf("%d",&a[i][j]); /*Reading the elements of the 3X3 matrix*/
        }
    }

    printf("\nThe entered matrix is: \n");
    for(i=0;i<3;i++)
    {
        printf("\n");
        for(j=0;j<3;j++)
        {
            printf("%d\t",a[i][j]); /*Displaying the matrix*/
        }
    }

    for(i=0;i<3;i++)
    {
        for(j=0;j<3;j++)
            b[i][j]=a[j][i]; /*Computing matrix transpose*/
    }
    printf("\n\nThe transpose of the matrix is: \n");
```

(Contd.)

```

for(i=0;i<3;i++)
{
    printf("\n");
    for(j=0;j<3;j++)
    {
        printf("%d\t",b[i][j]); /*Displaying the resultant transposed matrix*/
    }
}

getch();
}

```

Output

Enter a 3 X 3 matrix:

```

a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 4
a[1][1] = 5
a[1][2] = 6
a[2][0] = 7
a[2][1] = 8
a[2][2] = 9

```

The entered matrix is:

1	2	3
4	5	6
7	8	9

The transpose of the matrix is:

1	4	7
2	5	8
3	6	9

EXAMPLE B.5 Write a program to check whether the given matrix is symmetrical or not.

Program

```

/*Program for checking whether a given matrix is symmetrical or not*/
#include <stdio.h>
#include <conio.h>
#include <stdlib.h>

void main()
{
    int i,j,a[3][3];

    printf("Enter a 3 X 3 matrix:\n");

```

(Contd.)

B.8 Computer Programming

```
for(i=0;i<3;i++)
{
    for(j=0;j<3;j++)
    {
        printf("a[%d][%d] = ",i,j);
        scanf("%d",&a[i][j]); /*Reading the elements of the 3X3 matrix*/
    }
}

printf("\nThe entered matrix is: \n");
for(i=0;i<3;i++)
{
    printf("\n");
    for(j=0;j<3;j++)
    {
        printf("%d\t",a[i][j]); /*Displaying the matrix*/
    }
}

for(i=0;i<3;i++)
for(j=0;j<3;j++)
    if(a[i][j]!=a[j][i])
    {
        printf("\nThe matrix is non-symmetrical");
        getch();
        exit(0);
    }

printf("\nThe matrix is symmetrical");

getch();
}
```

Output

Enter a 3 X 3 matrix:

a[0][0] = 1
a[0][1] = 2
a[0][2] = 3
a[1][0] = 2
a[1][1] = 4
a[1][2] = 5
a[2][0] = 3
a[2][1] = 5
a[2][2] = 6

The entered matrix is:

1	2	3
2	4	5
3	5	6

The matrix is symmetrical

B.2 RECURSION

EXAMPLE B.6 Write a program for generating the Fibonacci series using recursion.

Program

```
/*Program for recursively generating Fibonacci series*/
#include <stdio.h>
#include <conio.h>

int fib(int);
void main()
{
    int i;
    int len=20;
    printf("\t\t<----FIBONACCI SERIES---->\n");

    for(i=0;i<=len-1;i++)
        printf("  %d",fib(i));

    getch();
}

int fib(int n)
{
    if(n<=1)
        return(n);
    else
        return(fib(n-1)+fib(n-2)); /*Recursive Function call*/
}
```

Output

```
                <----FIBONACCI SERIES---->
0  1  1  2  3  5  8  13  21  34  55  89  144  233  377  610  987  1597  2584  4181
```

B.3 SELF-REFERENTIAL STRUCTURE

A self-referential structure is a structure that contains member pointers pointing to itself. That means, it declares one or more of its members as pointers to itself. Such types of structures are commonly used during linked implementation of data structures. For example, consider the following structure declaration representing a queue node:

```
struct queue
{
    int info;
    struct queue *next;
};
```

In the above declaration, next is a pointer to the same structure of which it is a part of. Logically, next is being used here to point to the next node in the queue.

Solved Question Paper (JANUARY 2012) SET-I

Code No: R10105/R10

**IB.Tech I Semester Regular Examinations, January 2012
C Programming
(Common to All Branches)**

Time: 3 hours

Max Marks: 75

**Answer any Five Questions
All Questions Carry Equal Marks**

1. a) What is an algorithm? Write an algorithm to arrange three integer elements in ascending order.

b) What are the programming development steps? Explain.

8m + 7m

(a) Algorithm:

Refer Section 1.8 & 1.9

Algorithm to arrange three integer elements in ascending order:

Step 1: Start

Step 2 : Accept three numbers from user (a, b, c)

Step 3 : If a < b then goto step 4 else goto step 8

Step 4 : if a < c then goto step 5 else goto step 7

Step 5 : If b < c then goto step 9 else goto step 6

Step 6 : Interchange b and c and goto step 9

Step 7 : Interchange a and c and goto step 3

Step 8 : Interchange a and b and goto step 3

Step 9 : Display “Ascending order”

Step 10 : Display a, b, c

Step 11 : Stop

(b) Refer Section 1.22

2. a) Write briefly about the C Tokens with suitable examples

b) Write a program to find the largest of three numbers using conditional operator 7m + 8m

a) Refer section 1.27, 1.28 and 1.29

b)

```
# include <stdio.h>
# include <conio.h>
void main()
{
    int a, b, c, big ;
    clrscr() ;
    printf("Enter three numbers : ") ;
    scanf("%d %d %d", &a, &b, &c) ;
    big = (a > b) ? (a > c ? a : c) : (b > c ? b : c) ;
    printf("\nThe biggest number is : %d", big) ;
    getch() ;
}
```

3 a) Write briefly about bit-wise operators with suitable examples.

b) Write a program to award the grade to the students, based on average marks (Use switch statement) 8m + 7m

a) Refer Section 1.51

b) Refer Page SQP 2.9, question 6(b)

4. What are different types of iterative statements? Explain each with suitable examples. 15m

Refer Section 3.12, 3.13 and 3.14

5. a) What is an array? Describe array declaration, initialization, and accessing array elements.

b) Write a program to implement matrix multiplication using two dimensional arrays

7m + 8m

a) Refer Section 4.1, 4.2, 4.3 and 4.4

b) Refer Appendix A , Example A.41

6. a) What are the different types of storage classes? Explain each with suitable examples.

b) Write a program to generate Fibonacci series using recursive function

7m + 8m

a) Refer Section 5.19

b) Refer Appendix B, Example B.6

7. a) What is a pointer? Describe call by value and call by address with suitable examples.
 b) Write a program to arrange a set of strings in ascending order using pointers. 7m + 8m

a) Refer Section 6.1, 5.7 and 6.13

b)

```
#include<stdio.h>
#include<string.h>
void main()
{
    char s[5][20],t[20];
    int i,j;
    clrscr();
    printf("Enter any five strings : \n");
    for(i=0;i<5;i++)
        scanf("%s",s[i]);

    for(i=1;i<5;i++)
        for(j=1;j<5;j++)
            if(strcmp(*(s+j-1),*(s+j))>0)
            {
                strcpy(t,*(s+j-1));
                strcpy(*(s+j-1),*(s+j));
                strcpy(*(s+j),t);
            }

    printf("Strings in order are : ");
    for(i=0;i<5;i++)
        printf("\n%s",s[i]);
    getch();
}
```

8. a) List the differences between structures and union. Describe structure declaration, initialization, and accessing elements.

b) Write briefly about self referential structures and dynamic memory management functions.

7m + 8m

a) Differences between structures & Unions : Refer Section SQP 2.8

Structure declaration, initialization, and accessing elements : Refer Section 7.3, 7.4 and 7.5

b) **Self referential structures:** Refer Appendix B, B.3

dynamic memory management functions: Refer Section: 6.18 , 6.19 and 6.20

Solved Question Paper (JANUARY 2012) SET-2

Code No: R10105/R10

IB.Tech I Semester Regular Examinations, January 2012
C Programming
(Common to All Branches)

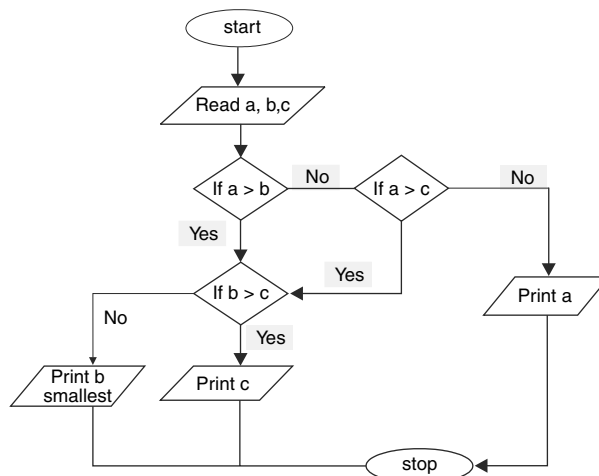
Time: 3 hours

Max Marks: 75

Answer any Five Questions
All Questions Carry Equal Marks

1. a) What are the computer languages? Explain and draw the flow chart for finding the smallest of Three numbers
- b) What are the different types of operators in C programming language? Give an example on each operator. 7m + 8m
- a) Computer Languages : Refer Section :1.2

Flowchart:



SQP-2.2 *Computer Programming*

b) Refer Section 1.44 to 1.52

2. a) Write briefly about two-way and multi-way selection statements.

b) Write a program to print the given any integer number in words using switch and while statements. 7m + 8m

a) Refer Section 2.1 to 2.8

b) Refer Section SQP 4.3 Question 2(b)

3. a) What are the advantages of for loop? List the differences between for loop and do while loop. Give an example on break and continue statements.

b) Write a program to print the given format

```
      *
    *   *
  *       *
```

7m + 8m

a) Refer Section 3.11 and 3.15

b)

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int bin,p,q,r,x;
    clrscr();
    bin=1;
    q=0;
    printf("Rows you want to input:");
    scanf("%d",&r);
    printf("\nPascal's Triangle using * s:\n");
    while(q<r)
    {
        for(p=40-3*q;p>0;--p)
            printf(" ");
        for(x=0;x<=q;++x)
            printf(" * ");
        printf("\n");
        ++q;
    }
    getch();
}
```

4. a) Explain the detail about 1-Dimensional and 2-Dimensional array declaration, accessing elements, initialization with suitable examples.

b) Write a program to arrange characters of any given string in ascending order. 8m + 7m

Answer:

a) Refer Section 4.2, 4.3 , 4.4, 4.5 & 4.6

b)

```

#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
    int i,j,d;
    char ch[20],temp;
    clrscr();
    printf("\nEnter the length of the string:");
    scanf("%d",&d);
    printf("\nEnter the characters:");
    for(i=0;i<d;i++)
        ch[i]=getchar();
    printf("\nThe characters are:");
    for(i=0;i<d;i++)
        printf("\n%c",ch[i]);
    for(i=0;i<d;i++)
        for(j=i+1;j<d;j++)
            if(ch[i]>ch[j])
            {
                temp=ch[i];
                ch[i]=ch[j];
                ch[j]=temp;
            }
    getch();
}

```

5. a) Write briefly about the user defined functions and standard library functions. Give an example on parameter passing and static storage class.

b) Write a program to implement towers of Hanoi using recursive function.

8m + 7m

a) Refer Section 5.2, 5.45, 5.18, 5.7 and 5.19

b) Refer Section 5.21

6. a) What is dangling pointer? Give an example on pointers to pointer and passing by address.

b) Explain about dynamic memory allocation function and use of command line arguments.

7m + 8m

a) If any pointer is pointing the memory address of any variable but after some variable has deleted from that memory location while pointer is still pointing such memory location. Such pointer is known as dangling pointer and this problem is known as dangling pointer problem.

Dangling pointers arise when an object is deleted or deallocated, without modifying the value of the pointer, so that the pointer still points to the memory location of the deallocated memory

Example for pointer to pointer:

```
int **p;
int *q;
p = (int **)malloc(sizeof(int *));
*q = (int *)malloc(sizeof(int));
**p = 12;
q = *p;
printf("%d\n", *q);
free(q);
free(p);
```

Example for passing by address:

```
#include <stdio.h>
void f(int *j)
{
    (*j)++;
}
int main()
{
    int i = 20;
    int *p = &i;
    f(p);
    printf("i = %d\n", i);
    return 0;
}
```

b) Refer Section 6.18 and 6.22

7. Write short notes on

a) structures and Functions, Bit- fields

b) Structure and Union

c) Extern, auto and register storage classes

5m + 5m + 5m

a) Refer Section 7.11 & 7.14

b) Refer Page no SQP 2.8

c) Refer Section 5.19

8. a) Describe in detail about file handling functions in C Programming language.

b) Write a program to copy the one file data into another file.

8m + 7m

a) Refer Section 8.3 to 8.7

b) Refer Appendix A, Example A.73

Solved Question Paper (JANUARY 2012) SET-3

Code No: R10105/R10

IB.Tech I Semester Regular Examinations, January 2012
C Programming
(Common to All Branches)

Time: 3 hours

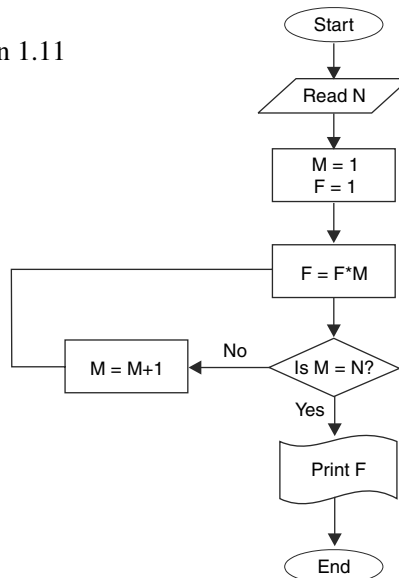
Max Marks: 75

Answer any Five Questions
All Questions Carry Equal Marks

1. a) What is a pseudo code? Draw the flow chart for finding factorial of a number.
b) List the differences between interpreter and compiler. Discuss different computer languages.

7m + 8m

a) Pseudo code: Refer Section 1.11



SQP-3.2 Computer Programming

b) Refer Section 1.5.2 and 1.3

2. a) Write a program to find the roots of a quadratic equation.

b) Write a program to find the reverse of a given integer using while.

7m + 8m

a) Refer Section 1.12 , Figure 1.52

b)

```
int main()
{
    int num,r,reverse=0;
    printf("Enter any number: ");
    scanf("%d",&num);
    while(num)
    {
        r=num%10;
        reverse=reverse*10+r;
        num=num/10;
    }
    printf("Reversed of number: %d",reverse);
    return 0;
}
```

3. a) Explain different selection statements with their syntax

b) Write a program using do-while loop for the following format.

```

      1
    2   2
  3   3   3
4   4   4   4
```

7m + 8m

a) Refer Section 2.2, 2.7 and 2.8

```
#include<conio.h>
long calc( int );
int main()
{
    int i,j,row;
    printf("Enter no. of rows in pascal triangle : ");
    scanf("%d", &row);
    for(i=0; i<row; i++)
```

(Contd.)

```

{
    for(j=0; j<=(row-i-1); j++)
        printf(" ");
    for(j=0; j<=i; j++)
        printf("%ld ",i);
    printf("\n");
}
    return 0;
}
long calc( int num)
{
    int x;
    long res=1;
    for(x=1; x<=num; x++)
        res=res*x;
    getch();
    return (res);
}

```

4. a) What is an array? Explain compile time and runtime initialization with suitable examples.
 b) Write a program for finding trace of a matrix using 2-dimensional arrays 7m + 8m
 a) Refer Section 4.1, 4.4 and 4.6
 b) Program:

```

#include<stdio.h>
main()
{
    int a[10][10],i,j,sum=0;
    printf("enter the values of m,n");
    scanf("%d%d",&m,&n);
    printf("enter the elements of matrix a");
    for(i=0;i<m;i++)
        for(j=0;j<n;j++)
            scanf("%d",&a[i][j]);
    for(i=0;i<m;i++)
        for(j=0;j<n;j++)
            if(i==j)
                sum=sum+a[i][j];
    printf("trace of a matrix=%d",sum);
}

```

5. a) What is a recursion? Write a program to search an element in an array using recursive function.

b) Define function. Explain functions with return type and non-return type with suitable examples. **7m + 8m**

a) Recursion: Refer Section 5.16

b) Program:

```
#include <stdio.h>
#define SIZE 100
int linearSearch( const int [], int, int );
int main()
{
    int a[ SIZE ], x, searchKey, element;
    for ( x = 0; x <= SIZE - 1; x++ )
        scanf("%d",&a[i]);
    printf( "Enter integer search key:\n" );
    scanf( "%d", &searchKey );
    element = linearSearch( a, searchKey, SIZE );
    if ( element != -1 )
        printf( "Found value in element %d\n", element );
    else
        printf( "Value not found\n" );
    return 0;
}
int linearSearch( const int array[], int key, int size )
{
    int ret =-1;
    if (array[0]== key)
        ret=key;
    else
        if(size>0)
            ret = linearSearch(&array[1],key,size-1);
        return ret;
}
```

b) Refer sections 5.1, 5.10, 5.11, 5.12, 5.13, 5.14

6. a) What are command line arguments? Write a program to count the number of strings on the command line.

b) What is a pointer? Discuss call by value and call by reference with suitable examples.

7m + 8m

a) Refer Section 6.22

```
int main ( int argc, char *argv[] )
```

The integer, argc is the **argument count**. It is the number of arguments passed into the program from the command line, including the name of the program

Call by value: In call by value method, the called function creates a new set of variables and copies the values of arguments into them.

Example:

```
void swap(int x, int y)
{
    int temp;
    temp = x;
    x = y;
    y = temp;
    printf("Swapped values are a = %d and b = %d", x, y);
}

void main()
{
    int a = 7, b = 4;
    swap(a, b);
    printf("Original values are a = %d and b = %d", a, b);
    printf("The values after swap are a = %d and b = %d", a, b);
}
```

Call by reference: In call by reference method, instead of passing a value to the function being called a reference/pointer to the original variable is passed.

Example:

```
void swap(int *x, int *y)
{
    int temp;
    temp = *x;
    *x = *y;
    *y = temp;
    printf("Swapped values are a = %d and b = %d", *x, *y);
}
```

(Contd.)

SQP-3.6 Computer Programming

(Contd.)

```
void main()
{
    int a = 7, b = 4;
    swap(&a, &b);
    printf("Original values are a = %d and b = %d",a,b);
    printf("The values after swap are a = %d and b = %d",a,b);
}
```

7. a) What is nested structure? Write a program to print the details of employees of an organization like (Name, DateOfJoin, Salary) using nested structures.

b) Give the differences between structures and unions. Write a program using union.

8m + 7m

a) Refer Section 7.10

b) Program:

```
#include<stdio.h>
#include<string.h>
struct date
{
    int day;
    int month;
    int year;
};
struct company
{
    char name[20];
    int employee_id;
    int age;
    struct date dob;
};
int main()
{
    company employee;
    printf("\n Enter details of employee");
    printf("Enter employee Name  :");
    scanf("%s",employee.name);
    printf("Enter employee ID  :")
```

(Contd.)

```

scanf("%d", &employee. employee_id);
printf("Enter employee Age :");
scanf(" %d", &employee. Age);
printf("Date of Birth:");
printf("Enter Day:");
scanf("%d", &employee. dob.day);
printf("Enter Month:");
scanf("%d", &employee. dob.month);
printf("Enter Year:");
scanf("%d", &employee. dob.year);
printf(" Employee details are;
printf("%s %d %d %d %d %d",employee.name,employee.employee_id, employee.Age,
        employee.dob.day,employee.dob.month,employee. dob.year);

}

```

b) Refer Page No SQP 2.8

Program using Union: Refer Appendix Example A.69

8. a) What is a file? How do you declare a file? Explain different modes of operation on files with examples.

b) Write a program to merge the content of two files into a third file.

8m + 7m

a) Refer Section 8.2 and 2.3

b) Refer Appendix A Example A.78

Solved Question Paper (JANUARY 2012) SET-4

Code No: R10105/R10

**IB.Tech I Semester Regular Examinations, January 2012
C Programming
(Common to All Branches)**

Time: 3 hours

Max Marks: 75

**Answer any Five Questions
All Questions Carry Equal Marks**

1. a) Write an algorithm to draw the flowchart for finding the area of a circle.
b) Explain the different steps involved in creating and running programs with a neat flowchart. 7m + 8m
 - a) Refer page 1.43, Example 1.18
 - b) Refer Section 1.22

2. a) What are identifiers, variable and constants? Mention the rules to construct an identifier. Give some examples.
b) Explain the structure of a C program with an example to each step. 8m + 7m
 - a) Refer Section 1.28 to 1.30
 - b) Refer Section 1.20

3. a) write a program to find the largest number in an array of elements.
b) Explain different string manipulation functions with examples. 7m + 8m
 - a) Refer Page A.27, Example A.37
 - b) Refer Section 3.8

4. a) What is an array? What are its advantages? Explain declaration, initialization, accessing elements in an array.

b) Write a program to display a string in the following format

8m + 7m

**J
JN
JNT
JNTU
JNT
JN
J**

a) Refer Section 4.1 to 4.4

b)

```
#include<stdio.h>
#include<string.h>
main()
{ int c,l,d;
  char string1[]="JNTU";
  printf("\n\n");
  l=strlen(string1);
  for( c=0;c<=l;c++)
  {   d= c+ 1;
      printf("%. *s\n",d,string1);
  }
  for( c=l;c>=0;c--)
  {   d= c+ 1;
      printf("%. *s\n",d,string1);
  }
}
```

5. a) What are different storage classes? Explain with suitable examples?

b) Write a program for finding GCD of two numbers using recursive functions.

7m +8m

a) Refer Section 5.19

b)

```
#include "stdio.h"
gcd(int n,int m)
{
  if(m<=n && n%m == 0)
    return m;
```

(Contd.)

(Contd.)

```

        if(n < m)
            return gcd(m,n);
        else
            return gcd(m,n%m);
    }
main()
{
    int n,m,divisor;
    printf("Enter the two numbers : ");
    scanf("%d%d",&n,&m);
    divisor=gcd(n,m);
    printf("The Greatest Common factor of %d and %d is %d",n,m,divisor);
    return 0;
}

```

6. a) What is a void pointer? Explain array of pointers with an example.
- b) What is the difference between character pointer and integer pointer? Write a program using pointer to pointer with functions. 7m + 8m
- a) Void pointers are pointers pointing to some data of no specific type. A void pointer is defined like a pointer of any other type, except that void* is used for the type:

```
void *pt;
```

We can't directly dereference a void pointer; we must cast it to a pointer with a specific type first, for instance, to a pointer of type int*:

```
*(int*)pt;
```

Thus to assign a value to a void pointer, consider the following examples:

```
*(int*)pt=42;
```

```
*(float*)pt=3.14;
```

The use of void pointers is mainly allowing for generic types

Array of Pointers: Refer Section 6.12

- b) Integer pointer is a pointer variable which contains a address of an integer value and character pointer, contains address of a character type value.

Program:

```

#include<stdio.h>
int main(void)
{
    char **ptr = NULL;
}

```

(Contd.)

SQP-4.4 Computer Programming

(Contd.)

```
char *p = NULL;
char c = 'd';
p = &c;
ptr = &p;
printf("\n c = [%c]\n",c);
printf("\n *p = [%c]\n", *p);
printf("\n **ptr = [%c]\n", **ptr);
return 0;
}
```

7. Write short notes on

- a) **pointer to structures**
- b) **differences between structures and union**
- c) **bitfields**
- a) Refer Section 6.16
- b) Refer SQP 2.8
- c) Refer Section 7.14

5m + 5m + 5m

8. a) Write a program to reverse the first n characters in a file.

- b) **What is a text file, binary file? Explain formatted I/O in files.**

7m + 8m

- a) Program:

```
#include <stdio.h>
#include <conio.h>
#include <string.h>
#include <process.h>
void main(int argc, char *argv[])
{
char a[15], s[20], n;
int k, i, len, j=0;
FILE *fp;
if(argc!=3)
{
puts("Improper number of arguments.");
exit(0);
}
fp = fopen(argv[1],"r");
if(fp == NULL)
```

(Contd.)

(Contd.)

```
{
    puts("File cannot be opened.");
    exit(0);
}
k=*argv[2]-48;
n = fread(a,1,k,fp);
a[n]="";
len=strlen(a);
for(i=len-1;i>=0;i--)
{
    s[j]=a[i];
    printf("%c",s[j]);
    j=j+1;
}
s[j+1]="";
getch();
}
```

b) Refer Section 8.2 and 8.5.3

